


Unica

A new era in terms of design,
sustainability and advanced functions.



se.com/unica

Life Is On

Schneider
Electric



General content

Presentation	4
Unica Inserts	58
Unica Inserts with Fixing Frame	80
Unica Inserts with Fixing Frame and Claws	92
Unica Complete Offer: Inserts with Fixing Frame and Cover Frame	98
Unica Installation: Fixing Frame and Box	102
Unica Cover Frames	108
Unica Wiser	116
Unica KNX	124
Unica Antibacterial offer	128
Unica System+	142
Unica Technical Information	148
Unica Index	170



Breakthrough design

Products designed to be easy to install in your customers' homes, while bringing sophistication and freshness to their interiors.



Sustainability

A range that respects environmental needs throughout its life cycle, for eco-friendly customers.




Advanced functions

A range designed to meet all your customers' needs, whether in terms of comfort, energy efficiency, connectivity or design.



Schneider
Electric

A range
like no
other

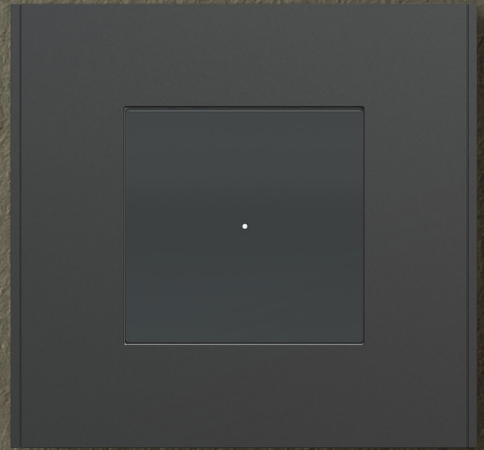

Give your projects a head start with Unica

Pushing back all the limits.

This is what the Unica range invites your customers to do.

A design breakthrough, an always further sustainable conception, and the same highest standard advanced functions: Unica reinvents itself and brings your clients' project several steps further, where none has ever explored yet.

With its latest Unica Deco series of cover plates, the range is enriched with a new, almost infinite, potential.

Its unprecedented straight lines and sharp edges allows you to offer a yet unseen design intent to your clients. Audacious and classical at the same time, Unica Deco opens new ways to make home interiors more eye-catching than ever.

Beyond its look, the whole range has been designed to meet your clients' increasing expectations for sustainability. From production to the final installation, Unica has been developed with low environmental impact in mind.

Ready to re-discover The Unica range?

The journey begins here.



The new series of decorative & sustainable plates!




Unica Deco Anthracite Cover Frame
with Unica USB Socket

Unica Deco


Because your design defines you!

Unica is reinventing itself, opening the way to surprising and daring innovations. Get ready to be surprised! This new variation offers a breathtaking step further in terms of look. Square and thin, sleek and smooth... The evidence strikes at first sight: Unica Deco is made to boost any interior.


Unica Deco is crafted with the latest and future trends in mind. With its straight lines and vertical dynamic, it takes several steps forward in terms of look. Its modern feel and floating effect make it utterly easy to reach the perfect match for any of your clients' projects. Its textures play with the eyes as with the touch. Matt-Satin frames with glossy or matt-satin vertical lines combinations... the choice is theirs. So are the sensations.




Unica Deco
White




Unica Deco
Aluminum



Unica Deco
Light gray



Unica Deco
Taupe



Unica Deco
Anthacite



Modern

Aluminum finishings are always a good idea to add modern touches to any space.

Aluminum



Earthy

Earth colors will never go out of fashion and that you will never tire of.

Taupe

Matt and Classy

The timeless white brings freshness and elegance to any room.



White

Elegance

What would design be without anthracite? Chic and smart, it goes well with everything, especially waxed concrete.



Anthracite

Unica Studio

Add character to interiors with signature rounded frames.

Enjoy timeless, universal design

The Unica Studio range gives your customers a selection of frames to easily match different types of interiors, from minimalist to traditional. Made from high-performance thermoplastic, they're robust and long lasting.


The Unica Studio range comes in two versions.

Single-volume frames are available in solid colors (white, beige, aluminum, and anthracite).

The double-skin version has frames composed of a colored or metal layer over a white, beige, or anthracite base (see Unica Studio Color and Unica Studio Metal).



Unica Studio
White



Unica Studio
Beige



Unica Studio
Anthracite



Unica Studio
Aluminum


Single-volume frames

The white and beige frames have a mirror-polished surface for a nice glossy finish and are a perfect fit for lighter interiors with brighter wall colors.

The anthracite and aluminum finishings work for darker interiors or as bold color accents. The anthracite frames have a soft-touch perception, while the aluminum ones add a bit of shine.






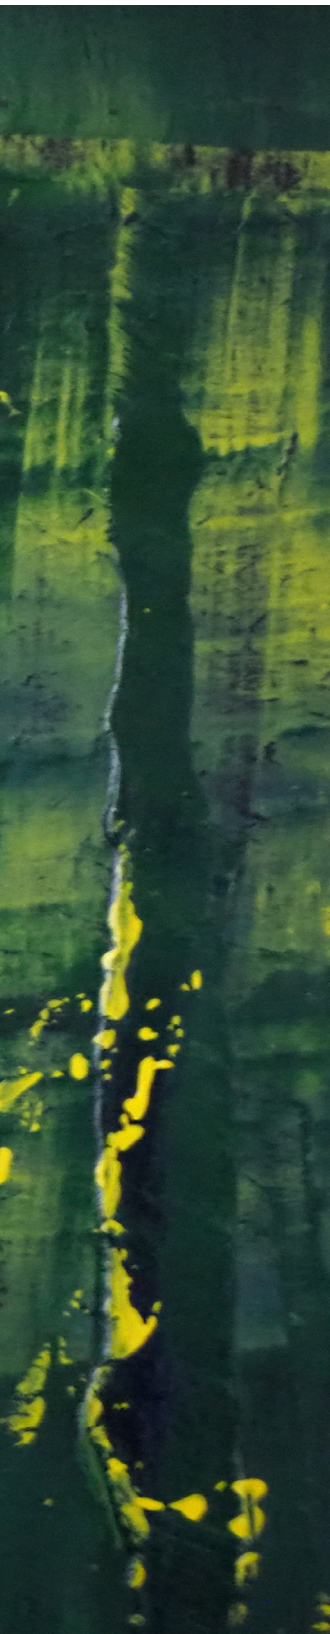


Unica Studio Color

Invigorate any room with a splash of color.

With nine colors available – from soft and light, to bold and lively – the Unica Studio Color range offers a hue to complement any decor or style. Add to that a modern shape and smooth, curved surface, and your customers get perfect switches for energetic interiors.




Unica Studio Color
White




Unica Studio Color
Beige



Unica Studio Color
Light gray




Unica Studio Color
Taupe



Unica Studio Color
Light green



Unica Studio Color
Red



Unica Studio Color
Plum



Unica Studio Color
Dark gray



Unica Studio Color
Chocolate

Unica Studio Color double-skin frames have metallic particles added to the two layers of paint to add depth to the colors and create a more dynamic appearance.


Unica Studio Outline

Enrich your designs with a subtle color accent.

The Unica Studio Outline frames comes in neutral white with a touch of color added by a delicate outline on the frame. Ten outline colors, from vibrant yellow to moderate gray and beige, give your clients a broader palette to elevate interior designs while keeping them well balanced.



Unica Studio Outline
White



Unica Studio Outline
Yellow



Unica Studio Outline
Red



Unica Studio Outline
Anthracite



Unica Studio Outline
Plum



Unica Studio Outline
Chocolate



Unica Studio Outline
Beige



Unica Studio Outline
Light gray




Unica Studio Outline
Gray



Unica Studio Outline
Aluminum



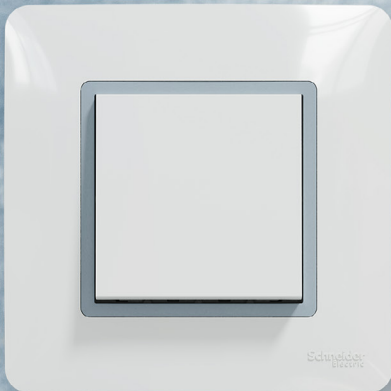






Unica Studio Metal


Give home interiors
a modern edge.

The Unica Studio Metal range features five ultra-modern metal finishes that combine quality and robustness with elegant design.


The frames are made of sheet metal with an anodized finishing to create a bright smooth surface. An additional high-resistance treatment helps ensure a lasting look by minimizing the impact of aging and environmental conditions.



Unica Studio Metal
Copper




Unica Studio Metal
Gold




Unica Studio Metal
Bronze



Unica Studio Metal
Dark Aluminum



Unica Studio Metal
White Aluminum

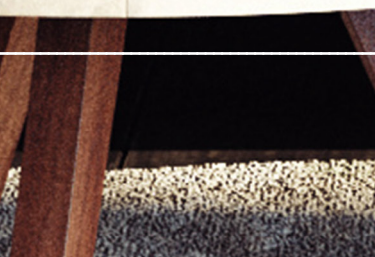



Unica Pro

Achieve the perfect balance.



Antibacterial
White



Unica Pro
White



Unica Pro
Aluminum



Unica Pro
Anthracite

The Unica Pro range provides the perfect balance of style and functionality. Its signature design, with a ring surrounding the frame, makes the frames stand out from the wall and adds a smooth, light perception to them.

Available in white, aluminum, and anthracite, Unica Pro frames satisfy all essential style needs.



Antibacterial

The Unica Pro range also includes devices with a white antibacterial finish for those mindful of hygiene and safety (find out more in the “Antibacterial for greater peace of mind” section).

Sustainable by design, circular in spirit

Discover the lifecycle of Unica
products and packaging.





Step 1

Designed for sustainability

The components are designed to be easily disassembled, separated and dismantled, so they can be sent for recycling according to their **material nature**.



Step 2

Made of recycled material

Unica range is made of **up to 45%** of recycled plastic.



Step 3

Manufactured for sustainability

The entire range is manufactured in our factory in Puente La Reina, which uses **100% renewable energy** for production.



Step 4

Packed with maximum care and responsibility

Our packaging is made from **recycled materials** and is recyclable. Chemical paint is gradually being replaced by vegetable oil-based ink.



Step 5

Compatible with connected solutions

The Unica range is compatible with Wiser. Our smart sockets and switches make **saving energy** and **reducing waste easier**.



Step 6

Local supply chain

Unica range is designed and manufactured in Spain to keep the **supply chain local**.



Step 7

For sustainable future

Unica products are made from mostly recyclable materials and components. Their **high quality** makes the devices durable over many years.

Peace of mind that comes with concrete proof points

Let's think about the environment.
Let's develop a sustainable range.
Let's meet your clients' expectations.
But most important: let's prove it.

At the manufacturing stage

100%

amount of renewable electricity used to produce Unica.

Carbon neutral factory

building and processes.


0 amount of carbon emitted from the production building.
amount of waste to landfill since 2018.

+3% yearly increase in energy efficiency.

+6% increase in water saving.

50% and more

of raw material coming from recycled sources.

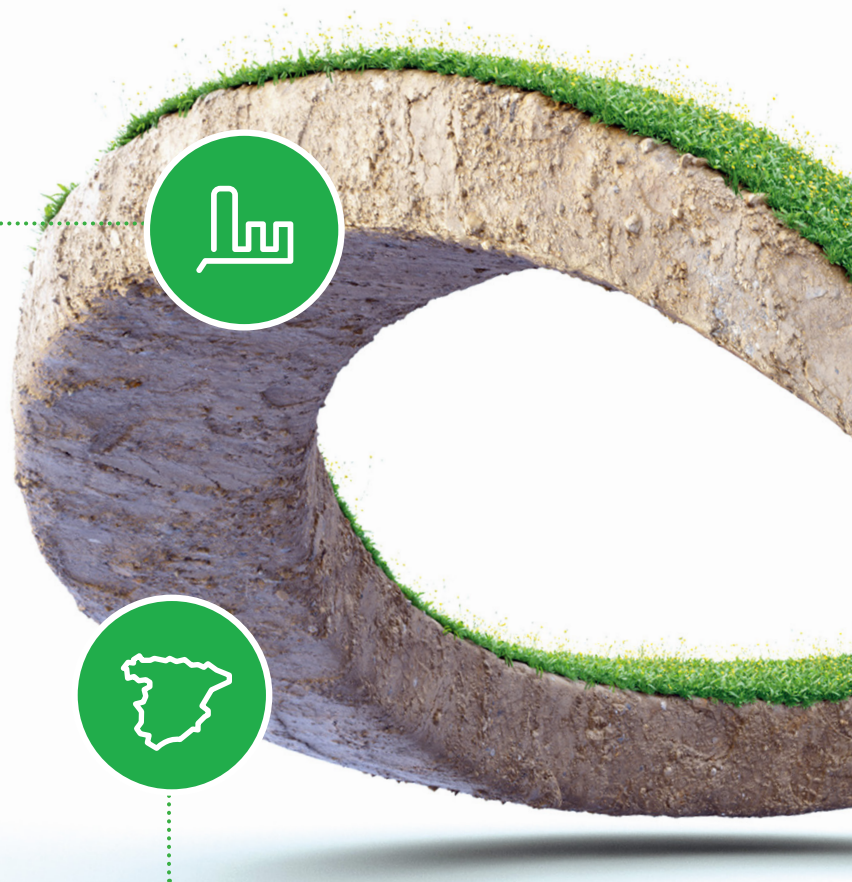

And all the time



Sustainable performance, by design

10,20 tons

of CO₂ saved with transportation per year.

Amount of CO₂ saved

is higher than the circumference of the world.

20%

less trucks needed for transportation thanks to compact packaging.



Green revolution packaging

- 1 – From normal cartons to 70% recycled ones.
- 2 – Chemical paints and bleaching replaced with vegetable oil based inks.
- 3 – No more single-use plastic in flow packs.
- 4 – More items per box for professionals.



Saving plastic worth distance between Paris and Luxembourg.

349km

of plastic film saved yearly by removing single use plastic from product packaging.

Packaging includes to

70% recycled cardboard instead of virgin wood.

60%

reduction in chemical substances discharged (per box).

60% reduction in water consumed and discharged (per box).

88% reduction in pollution emissions and dust.



Unica leaves nothing to be desired


The new Unica range includes all the wiring devices you need to enhance the style, comfort, and safety of your customers' homes. From lighting control to entertainment system connections and smart home functions, Unica is ready to meet your clients' current and future needs.

Lighting control

Automatic light control with motion sensors improves safety and energy efficiency.


Rotary and pushbutton dimmers, compatible with both conventional and LED lighting, help easily adjust the ambiance.

Connectivity-ready switches, dimmers, and motion sensors can be easily integrated with the Wiser smart home system. A wireless switch can be used with Wiser to control lights and shutters from anywhere.

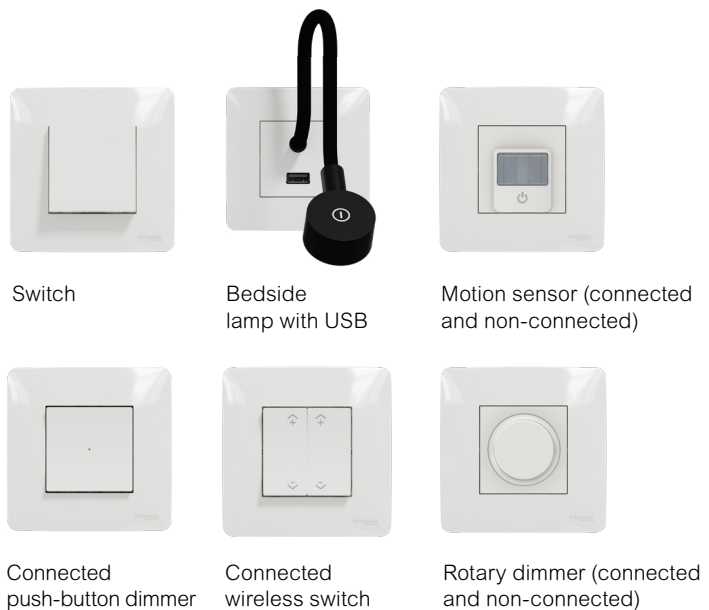

Shutter control

Manual-at-a-push control or fully automatic via Wiser, allows your clients to create moments and automations to increase comfort. Shutters can also protect home interiors from excessive sunlight and help discourage unwanted interest from strangers.



Shutter control



Connected shutter control



One-module shutter control



Thermostat

Temperature control

Unica thermostats can set a temperature and maintain it at a comfortable level as the outside temperature fluctuates, while also helping to reduce energy costs.



A worldwide range

To cater to different standards worldwide and diverse homeowner needs, Unica provides a broad selection of socket outlets.

All socket outlets have integrated child protection. The self-sealing shutters sit behind the electrode holes and close when the plug is removed, reducing the risk of a child inserting something into the holes.

Socket outlets for diverse needs and standards

Unica features standard socket outlets with lid and surface socket outlets that provide high aesthetics and prevent dust accumulation inside the outlet. For extra safety, socket outlets with surge protection are available. The IP44 devices can be used outdoors (see the “Robust and weather-resilient” section). The range features socket outlet versions available in almost all of the local standards (see Unica catalog for the full collection).



Side earth outlet



Side earth socket with lid



Surface pin earth socket



Socket with surge protection




Multistandard socket



British socket



American socket



Euroamerican socket 3 modules

Connected socket outlets

Connected to the Wiser by SE app, the connected socket enables advanced functionalities like remote load control, scheduling and energy monitoring.



Connected socket



Surface pin earth socket with USB



Side earth socket with USB

Socket outlets with USB

Sockets with an added USB-C port provide maximized flexibility and use of space.



Technology that connects

With an array of devices facilitating connectivity, Unica helps ensure your customers can use digital technologies in every corner of their house, without having to worry about low battery levels or network reach.

USB chargers

USB chargers include a quick charging option up to 18 W (3 A), with type A and type C ports which can charge a battery up to 75 percent in as little as 30 minutes.



USB quick charger
type A+C



USB charger
type A



Side earth
socket with USB
type C



Surface pin
earth socket with
USB type C



1-module USB charger
type A

Connect to your customer's world

The Wi-Fi repeater makes the internet available throughout the house. The range also includes R/TV sockets, RJ45 inserts and central plates as well as HDMI sockets to neatly connect HDTV and AV components.



Wi-Fi repeater



HDMI outlet



R-TV/SAT outlet



RJ45 data socket

Robust and weather-resilient

With Unica, your customers can provide convenient power access and connectivity even outdoors.

Outdoor devices

From IP44 switches and sockets to IP55 frames and compatibility with Mureva boxes, the range has devices to fit balconies, terraces, and gardens.



IP44 switch



IP44 socket outlet



IP55 Mureva box compatible with Unica.



IP55 cover frame




Sustainable and Smart homes

By choosing connected Unica devices that work with Wiser, you are helping your customers to make their home more comfortable while helping reduce energy use and costs.



From busy schedules and endless to-do lists to high energy bills, everyday life at home can get the better for your customers. Wiser is here to help them live more comfortably and more efficiently – with minimum effort.

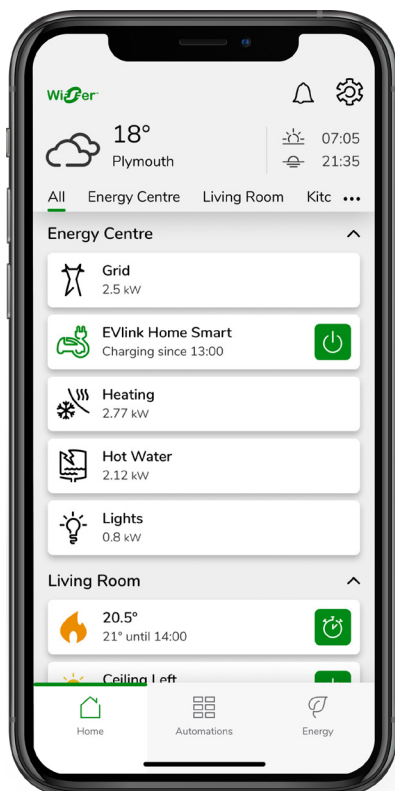

Energy efficient...

...to help your clients reduce their energy bills and live more sustainably.

Designed for a customized experience...

...so your customers can maximize comfort at home with intuitive control.

Modular and long-lasting...

...to create a durable solution that evolves with their needs.



Wiser is compatible with Amazon Alexa™, Google Assistant™, and Apple's Siri®.



Connected wireless switch



Wiser by SE app



Voice Control Device



Gateway



Energy management



EVlink Home Smart



PowerTag Energy Sensor



Side earth outlet



Smart Plug outlet

Temperature control



Wiser Flush-mounted Thermostat 16 A



Wiser Radiator Thermostat



Lighting and shutter control



Connected push-button dimmer



Rotary dimmer (connected and non-connected)



Connected socket



Connected wireless switch

Safety and security



Wiser Water Leakage Sensor



Wiser Window/Door Sensor



Wiser Temperature/Humidity Sensor



IP Camera Outdoor



IP Camera Indoor



Wiser Motion Sensor



Smoke Alarm

Energy savings

With Wiser, your clients have in-depth visibility of their energy consumption, so they can use energy better and more efficiently.

Home energy management

Your clients can use Wiser energy insights to minimize their energy costs by taking advantage of the best electricity tariffs and avoiding exceeding their power usage limits.

Energy dashboard

Offer a clear view of how they use energy to make better-informed decisions, change their habits, and keep their budget under control.

Room-by-room temperature control

They can adjust heating in every room individually, or turn it off while they're out via the Wiser by SE app to avoid wasting energy.

Moments and automations

They can save energy with customizable pre-set actions. For example, they can set up the lights to switch off if no motion is sensed for a predefined time.



Greater comfort

With Wiser, your clients can choose the most convenient way to manage their smart home system. That could be via the Wiser by SE app, a leading voice assistant, a wireless Switch, or automations. Or maybe traditional manual control. It is their choice.

All-in-one app

The Wiser by SE app allows your clients to manage all their Wiser functions, like energy, heating and cooling, safety, lighting, and shutters, directly from their smartphone. The app also includes advanced user access settings and links to Wiser tutorials and support.


Moments

They can create personalized Wiser Moments for all kinds of scenarios and situations in their home. A “Moment” enables them to set a

specific scene – for example a “Movie Moment” can dim the lights and close the shutters so they are ready for a movie night. They can activate it manually, with a voice command, or turn it on automatically via a schedule.

Notifications

Wiser notifies your clients of abnormal events such as high humidity, smoke, water leakage, unexpected motion, or unusually high energy use, so they can address the issues before they turn into costly emergencies.





Durable solution

Wiser is a modular, flexible system that lets your clients start small and expand later as they wish. For example, they may begin with lighting control, then add more Wiser functions. Robust and made with high-quality components, Wiser will serve your clients for years to come.

Robust connectivity

Wiser is based on a mesh network protocol (ZigBee) that helps ensure uninterrupted system service. If one device disconnects, other devices can still communicate with each other.

Regular updates

Frequent software updates keep Wiser in line with top-class security standards and helps provide advanced functionality and compatibility with third-party devices.

A partnership ecosystem

The Connectivity Ecosystem Partnership of Schneider Electric and third-party companies helps ensure seamless interoperability between Wiser and other smart devices.

Quality

Wiser's quality systems from Schneider Electric's long experience in the residential market. Wiser devices comes with transparent product information guaranteed by the Green Premium™ ecolabel.

Scalability

With ready-to-use connected devices that can be freely combined, Wiser is easy to set up and upgrade anytime your clients needs.




Antibacterial for greater peace of mind

For where hygiene is especially important, like a baby's room or the kitchen, the Unica range provides devices with antibacterial properties.

To enable these properties, the raw plastic material has been enriched with silver ions. All external surfaces of devices are made from antibacterial material that's fully compliant with the latest international standard, ISO 22196:2011*.

87%

of tested bacteria gone after 8 hours*

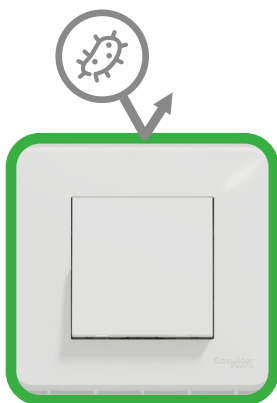

Silver ion technology

Silver ions act as a long-term barrier against bacteria, stopping their growth and spread.



22196:2011

* Testing done by an external laboratory. As per ISO 22196:2011 requirement, the microorganisms tested were Escherichia coli and Staphylococcus aureus.

Unique in the market, the antibacterial range includes a wide variety of functions, from regular switches and sockets, to connected devices. What's more, your clients don't have to compromise on aesthetics for greater safety. The range features the same elegant design as the regular white Unica devices.



Antibacterial

All products have the antibacterial logo visible.



Switch



Universal dimmer



Shutter control



Pushbutton with a label holder



Side earth socket

Other functions also available in the antibacterial finishing

Expand your customers' possibilities with the new Unica range

Take advantage of Unica's comprehensive collection of styles and functionalities to meet – and exceed – your clients' expectations.

With Unica, your clients will find a complementary range for any of your customers' space and decor. And you can offer them something more, like energy savings, thanks to connected functionalities compatible with smart home systems like Wiser and KNX.

Simple yet exceptional, Unica wiring devices helps you deliver truly unique home designs with future-ready comfort and convenience.





Workspaces tailored to any need

The Unica range provides the full scope of functions needed in a modern office. Socket outlets, network connectivity, multimedia outlets, and more. What your client needs, Unica delivers.



Single, double, and triple socket outlets

A selection of different outlet configurations lets you flexibly adapt to customer demands. Choose from socket outlets with screw and screwless mounting and double socket outlets with an IPT connection. All are simple to install. Color options are available.



Surface-mounted socket outlets

For areas with no dust allowed, surface-mounted sockets are a perfect choice. With an enhanced design, the outlets have a sleeker look for improved workspace aesthetics.

All Unica functions are compatible with Unica System+ devices, including workstations, floor boxes, desk units, poles and posts, and cable management solutions. Function modules can also be directly clipped into OptiLine 45 trunking for a seamless and highly aesthetic look.

EVERYDAY YOUR WAY



Motion sensor



Rotary dimmer

Light control functions

Rotary and pushbutton LED dimmers enable your customers to adjust the brightness of lights in areas like meeting rooms.

Motion sensors installed in areas like corridors or toilets help ensure the lights are on only when needed.

For more energy savings, a programmable timer can be used to switch off office devices, such as printers, during non-working hours.

Light control functions

From devices dedicated to USB charging to regular sockets with in-built USB slots, the Unica range provides powerful flexibility.

A quick charger with USB A and C can charge a battery up to 75 percent in as little as 30 minutes. Two different slots mean customers can charge diverse types of devices. The compact design and dual-charging options help maximize the use of space.

Another space-saving option is a one-module USB charger that can be used in workstations, for example.

A regular socket outlet with a USB-C port pulls double duty, powering electrical equipment and charging USB devices simultaneously.




HDMI outlet

Multimedia outlets

Unica provides a complete set of multimedia outlets to cover any functionality needed in a meeting room. The devices are quick and easy to install and can be seamlessly integrated into the environment.

Network connectivity

The full Unica network connectivity offer works with any Schneider Electric S-One connector and is also compatible with Keystone and SYSTIMAX connectors. Available in different sizes and two versions, inclined and flat, the modules can fit any application. Narrow modules are available in 45x45 mm size and standard modules in 45x90 mm size perfect for vertical workstations or poles and posts.



Flush mounting workstation



With a broad selection of modules, you can easily find a solution for a specific application.

Switches and socket outlets for outdoor and special areas

Unica devices are also available with IP44-rated protection. They have the same stylish appearance as regular switches and sockets but are more resistant to dust, water, etc.

IP55-rated frames are perfect for bathroom installations, while Unica devices combined with Mureva Boxes can be used for example in parking lots.





Maximized functionality, minimized space


When space is at a premium and you have multiple functions to fit, Unica System+ workstations come to the rescue.

Available in multiple sizes, in vertical or horizontal formats, for flush or surface mounting, these workstations help you deliver flexibility and convenience for office occupants.


Three color options – white (also available in antibacterial finish), aluminum, and anthracite – perfectly match Unica frames and help you create a uniform interior aesthetic. Unica System+ workstations are compatible with all function inserts offered by the Unica range.




Antibacterial



**Flush mounting
workstation**
White



**Flush mounting
workstation**
Aluminium



**Flush mounting
workstation**
Anthracite

Unica System+ workstations are also available in a white antibacterial finish (find out more in the “Make the office a safer space” section).

	Vertical	Horizontal
Surface		
Flush		

Ingenious design

Unica fixing frames as well as modular switches and sockets are designed to make installation smoother than ever.

Easy installation

More compact inserts with extra space for wiring and easy-to-access release buttons are just two examples of the clever features that help you save time on mounting.

Easy clipping

The size of Unica inserts allows for direct clipping in the OptiLine 45 trunking. This major simplification means one insert type can now be used for both homes and commercial buildings.

“

One of the most important features we instilled in Unica is ingenuity so the electrician could install more devices faster through the simplicity of design. ”

Frédéric Beuvry,
Vice President Industrial Design & Ergonomics
at Schneider Electric



Install faster and smarter

Speed up your work with the ingenious features of Unica wiring devices.

Fixing frames

Flexible installation



Thanks to symmetric fixing frame sides.

Secure fixing

Finer tolerance between the fixing frame and the insert. Less dangling, as the insert sits securely in the fixing frame.

Robust design

The Unica fixing frame is bigger and more rigid due to the smaller 40 x 40 mm insert window. This provides extra strength to the frame to help prevent distortion during fastening the clips.

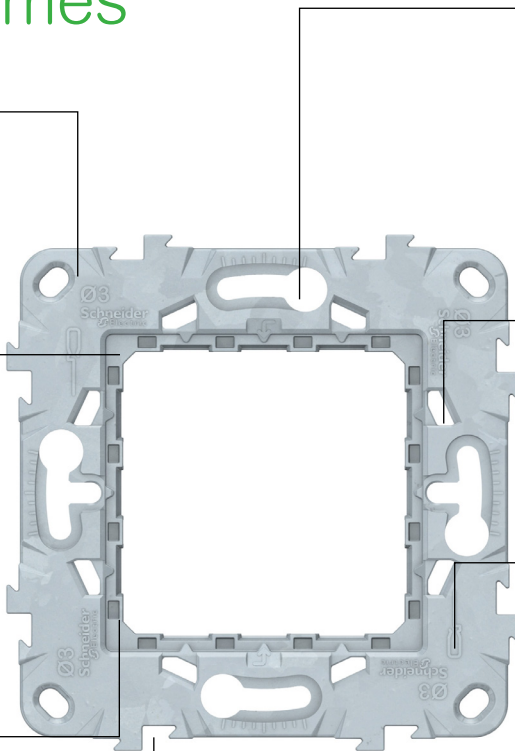

Perfect alignment

Unica's interlocking system helps avoid misalignment and slipping when installing two or more products in a multi-gang frame.

Easy adjustment

The screw slots allow rotation of the fixing frame in either direction, so the frame can be correctly mounted even if the installation box is misaligned. These slots are a perfect fit for flush-mounted box standard screws, so fixing is now even easier and more secure.

Stronger connection


Finer tolerances between the fixing frame and the cover create a stronger connection for more reliable installation.

Intuitive mounting

Slots for the screwdriver on the front and back of the fixing frame enable removing the insert without leaving a mark on the product. They also help avoid injuries from placing the screwdriver in the wrong position. Inserts can be easily removed from the front and back.

Safe handling

The claws are protected with a plastic cover to prevent harm during installation.

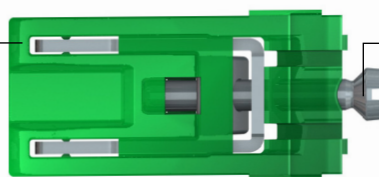

Reliable fixing

The claw length has been increased for better fixation in the box. When you hear a click sound, you know the claws are perfectly placed in the fixing frame. The claws are only valid for CE60 Zamak fixing frames.



Multiple versions


Fixing frames are available in plastic and zamak and with or without claws included.
Available also for 1 to 7 module installations, and also for Double British Standard boxes.




Plastic fixing
frame
2 modules




Plastic fixing
frame
3 modules




Plastic fixing
frame
4 modules




Plastic fixing frame
for Double British
Box




Zamak fixing
frame
2 modules



Zamak fixing
frame
3 modules

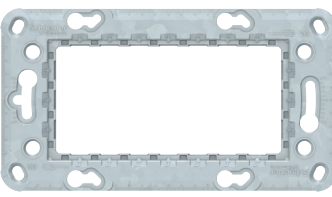

Zamak fixing
frame
4 modules

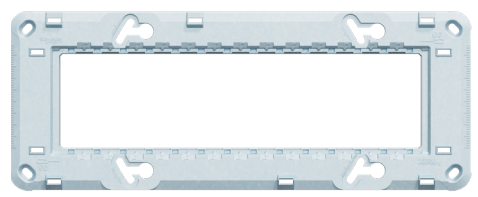

Zamak fixing
frame
7 modules

Switch to smart design

Extra space

A low mounting depth of 21 mm provides more space for wiring.

Easy removal

Inserts can be removed from the front and back thanks to the clearly visible notches.

Quick wiring

Prominent quick release buttons are easily accessible, so securing and releasing wires is quick and easy.

Simple connection

A wiring diagram is printed on the rear of the switch and pushbutton base to make connection options clearly visible.

Secure clipping


The insert is more secure in the fixing frame due to the improved design of the clipping system.

Clear on/off status

The large rocker clearly indicates the status of the switch in the 'on' and 'off' positions. When switched off, the rocker angle is wider for increased separation of the contacts. This helps avoid electrical arc, makes the switch more secure, and improves its electrical performance.

Effortless wiring

Conical cable entries make it easier to feed the connection wires into the terminal blocks. Even thicker wires can be connected in less time thanks to the larger openings.



Easy indicator conversion

Add an indicator lamp to any switch, easily. Simply remove the standard rocker and add the accessory lamp and the rocker with a light window.

Convenient testing from the front

Checkpoints at the front allow convenient functions testing and measuring. Plus, there's no need to disassemble the switch – the rocker can be easily removed to access the checkpoints.



Special functions



One-way switches and pushbuttons

For one-way switches and pushbuttons, the phase and neutral cable entries are on the top. This allows for simpler and faster wiring, without having to turn the insert to wire the other cable.

Slim insert

All white switch inserts come with a smaller housing which offers more space for fast and easy wiring.



Intermediate switch

Different colors indicating the two circuits make it easy to distinguish between them for simpler installation.

Upgradable pushbutton

All switch inserts with aluminum or anthracite rockers can be upgraded to a pushbutton thanks to a larger housing and a pushbutton spring.

EVERYDAY SIMPLE


Sockets with screw terminals

Extra space

A shallow mounting depth of 21 mm provides extra space for wiring.

Unclipped center plate

The center plate is unclipped, enabling easy removal of wiring.



Easy removal

Inserts can be removed from the front and back thanks to the clearly visible notches. The center plate can also be removed easily.

Shock protection

Integrated shutters protect against accidental contact and the ingress of foreign objects.

Large cable entries

Entries allow for wiring rigid and flexible cables of 2.5 mm² and 4 mm².

Fast wiring

With the cable entries beside each other, you can cut all wires to the same length. The screws are unfixed, so you don't have to unscrew them before you start to wire the cables.

Improved protection


Cable entries are clearly separated to make wiring more intuitive and help avoid short-circuit risk when flexible wires are used.



Sockets with screwless terminals

Extra space

A low mounting depth of 21 mm provides extra space for wiring.



Easy removal


Inserts can be removed from the front and back thanks to the clearly visible notches. The center plate is also easy to remove.

Shock protection

Integrated shutters protect against accidental contact and the ingress of foreign objects.

Effortless wiring

Conical cable entries make it easier to feed the connection wires into the terminal blocks. Thanks to larger openings, even thicker wires can be easily connected.



Quick wiring

Screwless socket outlet terminals and color-coded quick-release buttons make securing and releasing wires quick and easy, without removing the center plate.

Special socket outlets



Socket outlet with lid which can be opened to 180°




Double socket outlet

The new Unica range includes socket outlets for a variety of applications, including single, double, and multi-gang outlets. They offer screw and screwless options, with extra room and wider openings for quicker, simpler wiring.

Versatile workstations

With Unica System+ workstations, available as both flush- and surface-mounted, in vertical or horizontal orientation, in several sizes and finishes, you will easily deliver the right solutions for any workspace.

Flush-mounted box

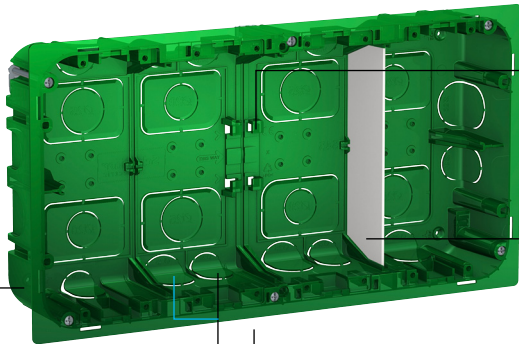


Holes for 25 mm Ø and 20 mm Ø tubes.

Easier data cable installation
Box depth of 50 mm for easier installation of Cat6 and 6 A data cables.


Broad flat frame
Enabling perfect installation, even when the walls are uneven. The broad frame also stands proud of slightly larger holes to avoid "falling".

Easy fixing
The fixing frames can be clipped directly to workstations, without tools.

Flexible clipping
Small bars allow single inserts to be clipped in and removed with greater flexibility. The bars allow any Unica insert to be fitted into the boxes.

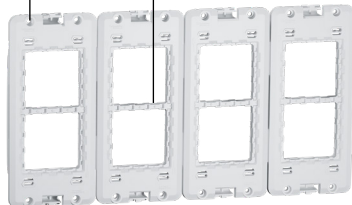


Fixing frame

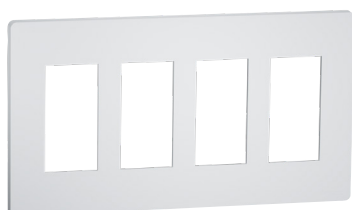

Design frame

Surface-mounted box

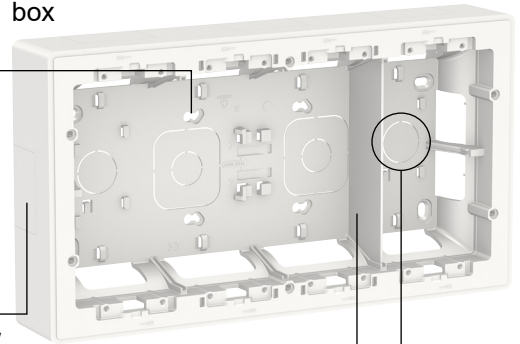

Easy adjustment
The mounting holes allow vertical and horizontal movement to balance the boxes for perfect alignment every time.

Flexible installation
Several entrances allow mounting without drilling.

Added security
Slide-in dividers keep power and data cables separated for extra safety.

Flush-mounted box compatibility
Workstations can be placed in a flush-mounted installation box instead of bringing the cables in via the mini-trunking. The box features entry holes for the cables.

Faster installs
The boxes come with pre-mounted and unscrewed screws to speed up installation.

No adaptors needed

The removable bar on the fixing frame allows secure fixing of single functions without an adaptor. You can also clip in one- or two-module inclined RJ45 connectors to the workstation.

Mini-trunking compatible

Unica System+ products are compatible with Schneider Electric mini-trunking.

DIN-rail ready

The use of an adaptor allows mounting of DIN-rail products such as Acti9.

Connect multiple boxes

A small adaptor allows connecting of several boxes.

Special functions for commercial applications

Unica System+ and OptiLine 45 trunking accept all Unica inserts. For faster installation, double- and triple-socket outlets and RJ45 inserts with two or four connectors are available. Even DIN rail products such as Acti9 can be fitted in with an adaptor.

Double socket outlet

Screw IPT terminal

Double socket outlets feature insulated piercing terminals. You don't have to insulate the wires with a tool – just insert them, close the levers, and insulation is done automatically. Disassembling is also easy, and the inserts can be reused.

Flexible cable sizes


Inserts accept 1.5 mm² and 2.5 mm² rigid and flexible cables.

Screws on the back

There's no need to remove the center plate to screw – the center plate is simply clipped in.

Easy installation

The big levers can be opened up to 90° for easy wiring and removing cables.

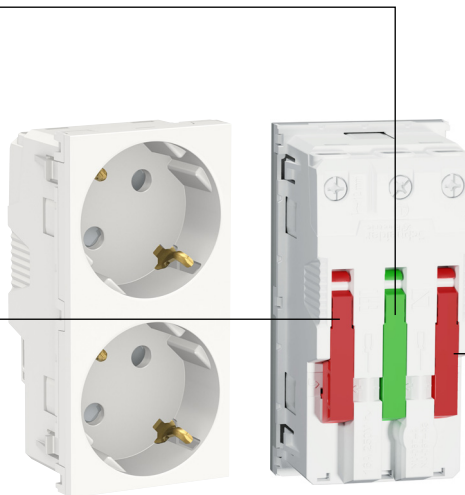

RJ45

Time-saving installation

Unica offers several designs of RJ45 center plates. The double and quadruple versions speed up installation as you only need one device and less space for up to four connectors.

Label holders

A convenient solution to help you identify the connected devices.

Protective shutters

They prevent the ingress of dust and other objects when the port is not in use.

Installation flexibility


The center plates can be used with any S-One Schneider Electric connector.



Clever solutions for flexible fixing

Multifix flush mounting boxes


The perfect way to fit Unica in plasterboard walls.

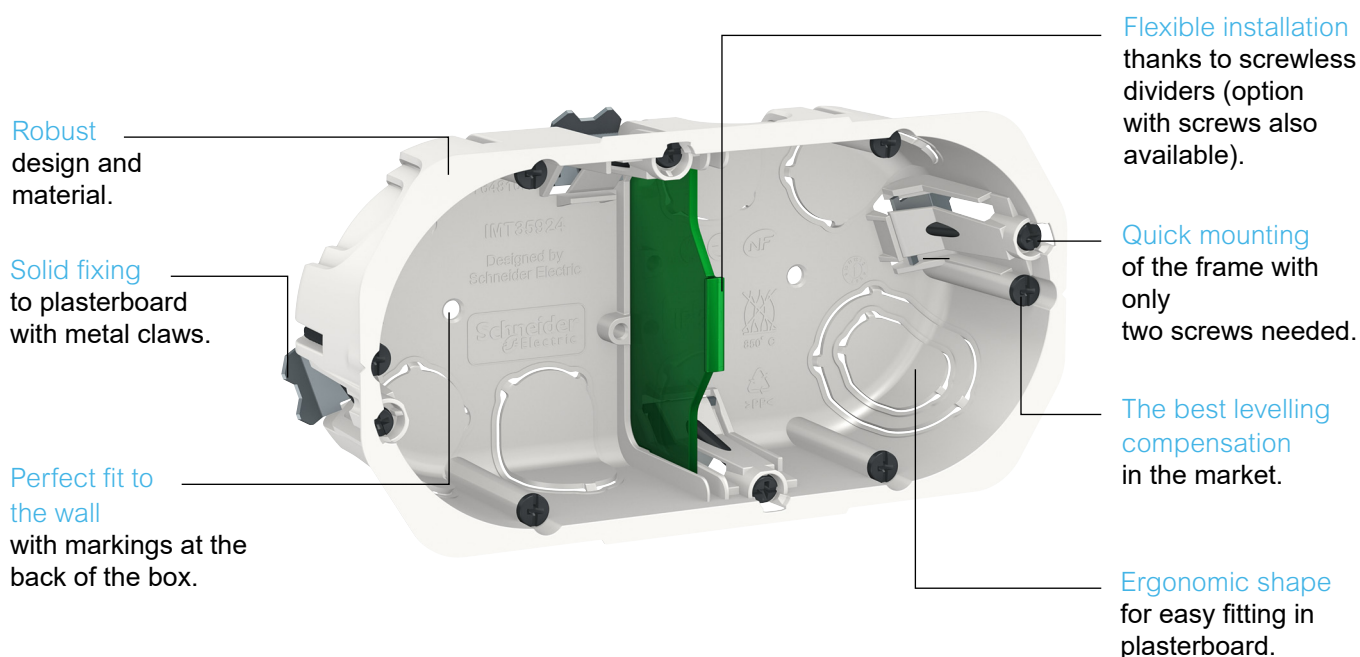

Multi-gang fixing frame

Adaptable to diverse needs.

The fixing frame can be used both for gang installations and, thanks to the movable dividers, for full window installations. In the latter case, the dividers are moved to the sides to cover wired parts for greater safety.

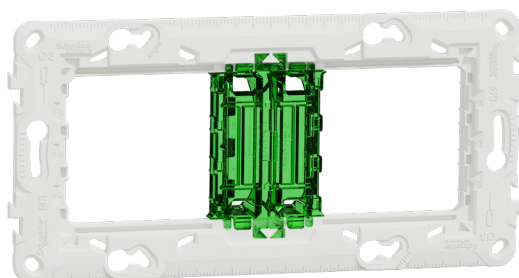




Standard gang
installation



Full window
installation

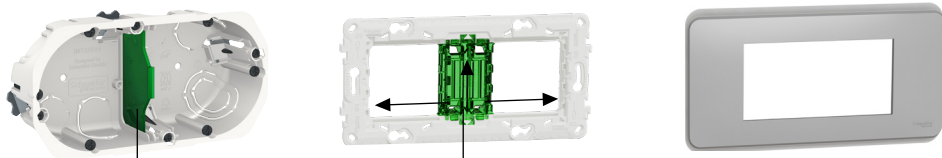

Remove the
divider by hand
to get a full
window.

The dividers can be easily removed from
the front or the back and clipped on the
sides to keep inserts and wires completely
covered for greater safety.




Backward compatibility


Because Unica has long been a popular choice for homes and buildings throughout Europe, it was a priority to make all of the new additions to the range backward compatible to easily integrate with legacy installations where necessary.

How the backward compatibility works

The new Unica inserts are more compact than the old Unica inserts*, so the fixing frame window in the new Unica is smaller. The back part of the new Unica insert is also smaller, but the old and new rockers have the same outer dimension (45x45 mm).



The old Unica fixing frame (44x44 mm)




The new Unica fixing frame (40x40 mm)



The new Unica insert (40x40 mm) and the rocker (45x45 mm)

You can fit new Unica inserts in the old Unica fixing frames with the adaptor.



The old Unica fixing frame (44x44 mm)





The adaptor



The New Unica insert (40x40 mm). The rocker is still 45x45 mm.

The old and new Unica frames are 100% compatible with inserts, fixing frames, and rockers from both the old and the new range.



*The old insert cannot be placed in the new fixing frame.

Unica

Inserts

Content

Switches	60
Specialized controls	64
Comfort devices	66
Sockets	68
USB Chargers	72
Data / Phone / TV	73
Other functions	77
Dedicated trunking applications	79

10 AX - 250 V AC switches

	One-way	One-way with indication lamp and symbol	Two-way	Two-way with indication lamp and symbol	Two-way with neutral terminal	Intermediate	Double one-way	Double two-way	IP44
2 modules									
□ white	NU320118	-	NU320318 ⁽¹⁾ NU320318F ⁽²⁾ NU320318P ⁽³⁾	-	NU320318S	NU320518	NU321118	NU321318 NU321318F	NU528218
■ aluminium	NU320130	-	NU320330	-	NU320330S	NU320530	NU321130	NU321330	NU528230
■ beige	NU320144	-	NU320344	-	-	NU320544	NU321144	NU321344	NU528244
■ anthracite	NU320154	-	NU320354	-	NU320354S	NU320554	NU321154	NU321354	NU528254
1 module									
□ white	NU310118	NU310118SMUR	NU310318 NU310318F	NU310318SDND	NU310318S	NU310518	-	-	-
■ aluminium	NU310130	-	NU310330	-	NU310330S	NU310530	-	-	-
■ beige	NU310144	-	NU310344	-	-	NU310544	-	-	-
■ anthracite	NU310154	-	NU310354	-	NU310354S	NU310554	-	-	-

Characteristics

- Connection: screwless terminals
- Cables: 1 to 2.5 mm² rigid/flexible

Lightable with NU9825A, NU9825AM and NU9825AZ LED lamps and rockers with visor







- (1) flow-pack
(2) no individual, flow-pack
(3) pack of 100 in a box

	One-way	Two-way	Intermediate
2 modules			
		-	-
□ white	NU320118SC	-	-
■ beige	NU320144SC	-	-
1 module			
□ white	NU310118SC	NU310318SC	NU310518SC
■ beige	NU310144SC	NU310344SC	-

Characteristics



- Connection: screw terminals
- Cables: 1 to 2.5 mm² rigid/flexible
- Lightable with NU9825A, NU9825AM and NU9825AZ LED lamps and rockers with visor

10 A - 250 V AC push-buttons





	NO			NO/NC		NO with location lamp		
	without symbol	with bell symbol	with light symbol	without symbol	with label holder	without symbol	with bell symbol	with light symbol
								
2 modules								
								
☐ white	NU320618 ⁽¹⁾ NU320618F ⁽²⁾	NU320618C	NU320618L	NU323618	NU324620	NU320618N ⁽¹⁾ NU320618FN ⁽²⁾	NU320618CN	NU320618LN
☐ aluminium	NU320630	-	-	NU323630	NU324630	NU320630N	NU320630CN	NU320630LN
☐ beige	NU320644	-	-	-	-	NU320644N	NU320644CN	-
☐ anthracite	NU320654	-	-	NU323654	NU324654	NU320654N	NU320654CN	NU320654LN
1 module								
								
☐ white	NU310618 ⁽¹⁾ NU310618F ⁽²⁾	-	-	NU313618	-	NU310618N	NU310618CN	-
☐ aluminium	NU310630	-	-	NU313630	-	NU310630N	-	-
☐ beige	NU310644	-	-	-	-	NU310644N	NU310644CN	-
☐ anthracite	NU310654	-	-	NU313654	-	NU310654N	-	-
Characteristics								
• Connection: screwless terminals • Cables: 1 to 2.5 mm² rigid/flexible • Lightable with NU9825A, NU9823AM and NU9825AZ LED lamps and rockers with visor								

(1) flow-pack



(2) no individual, flow-pack

	NO without symbol	NO with location lamp without symbol
		
1 module		
		
☐ white	NU310618SC	NU310618NSC
☐ beige	-	NU310644NSC
Characteristics		
• Connection: screw terminals • Cables: 1 to 2.5 mm² rigid/flexible • Lightable with NU9825A, NU9823AM and NU9825AZ LED lamps and rockers with visor		

16 AX - 250 V AC switches

	One-way	One-way with indication lamp	Two-way	2 poles	2 poles with indication lamp	3 poles
						
2 modules						
						
white	NU326118	NU326118N	NU326318	NU326218	NU326218S	NU328118
aluminium	-	-	NU326330	NU326230	NU326230S	-
beige	NU326144	-	-	-	-	-
anthracite	-	-	NU326354	NU326254	NU326254S	-
1 module						
						
white	NU316118	NU316118S	NU316318	NU316218	NU316218S	-
aluminium	NU316130	-	NU316330	-	-	-
beige	NU316144	NU316144S	NU316344	-	NU316244S	-
anthracite	NU316154	-	NU316354	-	-	-
Characteristics						
- Connection: screw terminals - Cables: 1 to 2.5 mm² rigid/flexible - Lighttable with NU9825A, NU9823AM and NU9825AZ LED lamps and rockers with visor		- Connection: screw terminals - Cables: 1 to 4 mm² rigid/f		- Connection: screw terminals - Cables: 1 to 2.5 mm² rigid/flexible - Lighttable with NU9825A, NU9823AM and NU9825AZ LED lamps and rockers with visor		

High rating switches

	20 A 2 poles	30 A 2 poles with indication lamp
		
2 modules		
		
white	NU322518	NU323218S
aluminium	-	NU323230S
beige	-	NU323244S
anthracite	-	NU323254S
Characteristics		
- Connection: screw terminals - Cables: up to 4 mm² rigid/flexible		- Connection: screw terminals - Cables: up to 6 mm² rigid/flexible

Accessories - Lamps

LED lamps	12-24 V DC	250 V AC	
	White	Red	White
			
	NU9823AM	NU9825A	NU9825AZ
Characteristics			
Consumption	0.15 mA	1,5 mA	0,05 mA

Spring to transform a switch to push-button






S520299

Characteristics

10 units delivered with a positioning aid tool

Accessories - Rockers

Rockers	without symbol	with visor	for Unica MGU●●●●●●
2 modules			
			
☐ white	NU920018	NU920018N	-
☐ aluminium	NU920030	NU920030N	-
☐ beige	NU920044	NU920044N	NU920044U
☐ anthracite	NU920054	NU920054N	-
1 module			
			
☐ white	NU910018	NU910018N	-
☐ aluminium	NU910030	NU910030N	-
☐ beige	NU910044	NU910044N	NU910044U
☐ anthracite	NU910054	NU910054N	-

Inserts

Specialized controls

Fan controls

	Two-way - On/Off - 10 A
2 modules	
	
☐ white	NU321418
☐ aluminium	NU321430
☐ anthracite	NU321454

Shutter controls

10 A	Push-button	Switch	2 poles Push-button	Switch
1 modules				
				
☐ white	NU310718SC	NU310818SC	NU312718SC	NU310918SC
☐ aluminium	NU310730SC	NU310830SC	-	-
☐ beige	NU310744SC	NU310844SC	NU312744SC	NU310944SC
☐ anthracite	NU310754SC	NU310854SC	-	-
Characteristics				
- Connection: screw terminals - Cables: 1 to 2.5 mm² rigid/flexible				

	Push-button 6 A	10 A	Switch 6 A
2 modules			
			
☐ white	NU320718	NU323718	NU320818
☐ aluminium	NU320730	NU323730	NU320830
☐ beige	NU320744	-	NU320844
☐ anthracite	NU320754	NU323754	NU320854
Characteristics			
- Connection: screwless terminals - Cables: 1 to 2.5 mm² rigid/flexible			

Cord push-buttons

	NO/NC - 10 A
2 modules	
	
☐ white	NU322620
☐ aluminium	NU322630
☐ beige	NU322644
☐ anthracite	NU322654
Characteristics	
- Connection: screwless terminals - Cables: 1 to 2.5 mm² rigid/flexible	

Key switches

	Push-button - 16 A	Switch - 16 A
2 modules		
		
☐ white	NU373118	NU370118
☐ aluminium	NU373130	-
☐ anthracite	NU373154	-
Characteristics		
3 positions		

Inserts

Specialized controls

Card push-buttons

	NO/NC - 10 A
2 modules	
	
☐ white	NU328318
☐ aluminium	NU328330
☐ beige	NU328344
☐ anthracite	NU328354



Emergency stop

	Key switch - 10 A	Mushroom - 10 A
2 modules		
		
☐ yellow	ALB45032	ALB45033

Inserts

Comfort devices

Dimmers

	Universal	Compensation module LED
2 modules		
		
☐ white	NU351418	
☐ aluminium	NU351430	
☐ anthracite	NU351454	
Load compensation module		
		CCT90501
Maximum loads		
LED lamp 230 V	 RC: 5...100 VA RL: 5...20 VA	
incandescent lamp 230 V	 5...200 W	
halogen lamp 230 V	 5...150 W	
LV halogen lamps 12 V	electronic transformer  5...150 VA	
	wound transformer  5...150 VA	
Characteristics		
• Remote control by unlimited number of auxiliary push-button • Automatic load detection • Wire configuration without neutral • Screw terminals connection • Memory function • Automatic overload protection, overheating protection, short-circuit protection		• Rated voltage: 230 VAC • Frequency range: 50 - 60 Hz • Power loss: 2 W max. • Installation: junction box, in the luminaire or in the sub-distribution panel, wired between neutral and dimmed phase.

Thermostats

	Room - 8 A	Floor - 10 A
2 modules		
		
☐ white	NU350118	NU350318
☐ aluminium	NU350130	NU350330
☐ beige	NU350144	NU350344
☐ anthracite	NU350154	NU350354
Characteristics		
	• For heating or air-conditioning • Settings range: + 5 to + 30 °C • Blue and red LED's for conditioning or heating indication	• For floor heating • Settings range: + 5 to + 45 °C • Green LED for voltage supply indication • Red LED for heating indication • Delivered with a 4 m temperature sensor

Motion sensors

10 A	
2 modules	
	
☐ white	NU352518
☐ aluminium	NU352530
☐ anthracite	NU352554
Maximum loads	
LED lamp 230 V	200 W
incandescent lamp 230 V	2200 W
halogen lamp 230 V	2000 W
motor (single-phase) 230 V	1000 VA
LV halogen lamps 12 V	1050 VA
electronic transformer	
wound transformer	500 VA
Characteristics	
• Screw terminals connection • Wire configuration with neutral • Detection angle: 160 ° • Movement detection area: 8 m frontal, 8 m lateral • Remote control by unlimited number of auxiliary push-button • Automatic load detection • Built-in on/off push-button switch • Time delay range: 1...30 min • Master/slave option; two sensors can be connected together to cover larger area	

Timers

Countdown timer relay - 10 A	
2 modules	
	
☐ white	NU353518
☐ aluminium	NU353530
☐ anthracite	NU353554
Characteristics	
• Time delay range: 5 min to 8 h • Integrated status LED • 3-wires (neutral required)	

Electronic card switch

8 A	
	
☐ white	NU354018
☐ aluminium	NU354030
☐ anthracite	NU354054
Characteristics	
• 8 A • Timed 10 seconds	

Side Earth sockets

90°	With shutters screwless	With shutters screw	Without shutters screw	With lid & shutters screw	IP44 frame with shutters	IP44 with shutters	Single socket+USB
2 modules							
							
□ white	NU305718	NU303718	NU303618	NU303718TA	NU003718	NU508218	NU301718
□ aluminium	NU305730	NU303730	-	NU303730TA	-	NU508230	NU301730
□ beige	NU305744	NU303744	NU303644	NU303744TA	NU003744	NU508244	NU301744
■ anthracite	NU305754	NU303754	-	NU303754TA	-	NU508254	NU301754
■ orange	-	NU303761	-	-	-	-	-
■ red	NU305703	NU303703	-	-	-	-	-
■ green	-	NU303706	-	-	-	-	-
Characteristics							
2P+E - 16 A - 250 V						• Screwless terminals • 2P+E - 16 A - 250 V • Shuttered	• 2P+E - 16 A - 250 V • Screwless terminals • Output power USB: 5 V

45°	Standard		With lamp
4 modules	Screwless	Screw *	Screw *
			
□ white	NU306618	NU306718A NU306718 ⁽¹⁾	NU306718AS NU306718S
□ aluminium	NU306630	NU306730A	NU306730AS
■ anthracite	NU306654	NU306754A	NU306754AS
■ red	NU306603	NU306703A NU306703 ⁽¹⁾	NU306703AS NU306703S ⁽¹⁾
■ green	-	-	NU306706AS
■ orange	-	-	NU306761AS
Characteristics			
• 2P+E - 16 A - 250 V • * for Screw devices - Screw-IPT terminals (except ⁽¹⁾: screw terminals in one side) • With shutters			

45°	Standard
6 modules	Screwless
	
□ white	NU307618
□ aluminium	NU307630
■ anthracite	-
■ red	NU307603
Characteristics	
• 2P+E - 16 A - 250 V • With shutters	



	Double Socket
	
□ white	NU206718
□ aluminium	NU206730
□ beige	NU206744
■ anthracite	NU206754
Characteristics	
• Screw terminals • 2P+E - 16 A - 250 V	

Pin Earth sockets

90°	Standard screwless	Standard screw	Surface screwless	Tamperproof screw	Sockets with surge protection	Single socket+USB
2 modules						
						
□ white	NU305918 NU305918E ⁽¹⁾ NU305918P ⁽²⁾	NU303918 NU303918E ⁽¹⁾	NU305218 NU305218E ⁽¹⁾ NU305218P ⁽²⁾	NU305118	NU305918EP	NU301518 NU301518E ⁽¹⁾
■ aluminium	NU305930 NU305930E ⁽¹⁾	NU303930 NU303930E ⁽¹⁾	NU305230 NU305230E ⁽¹⁾	-	NU305930EP	NU301530 NU301530E ⁽¹⁾
■ beige	NU305944E ⁽¹⁾	NU303944E ⁽¹⁾	NU305244E ⁽¹⁾	-	-	-
■ anthracite	NU305954 NU305954E ⁽¹⁾	NU303954 NU303954E ⁽¹⁾	NU305254 NU305254E ⁽¹⁾	-	NU305954EP	NU301554 NU301554E ⁽¹⁾
■ red	NU305903	NU303903E ⁽¹⁾	NU305203	NU305103	-	-
■ green	NU305906	-	NU305206	-	-	-
■ orange	NU305961	-	-	-	-	-
Characteristics						
2P+E - 16 A - 250 V - With shutters					2P+E - 16 A - 250 V - Screwless terminals - Output power USB: 5 V	

(1) For Czech Republic, Slovakia and Spain

(2) Pack of 100

45°	Standard			With lamp	Tamperproof		Tamperproof with lamp
	2 modules	4 modules	6 modules	4 modules	4 modules	6 modules	4 modules
							
□ white	NU304918	NU306918	NU307918	NU306918S NU306918SE ⁽¹⁾	-	-	-
■ aluminium	NU304930	NU306930	NU307930	NU306930S	-	-	-
■ anthracite	NU304954	NU306954	NU307954	NU306954S	-	-	-
■ red	NU304903	NU306903	NU307903	NU306903S NU306903SE	NU306103	NU307103	NU306103S
■ green	NU304906	NU306906	NU307906	-	-	-	-
Characteristics							
2P+E - 16 A - 250 V - Screwless terminals - With shutters							

(1) For Czech Republic, Slovakia and Spain

Pin Earth double sockets

	Double with cover frame	Double socket
		
white	NU406918	NU206518
aluminium	NU406930	NU206530
beige	-	NU206544
anthracite	NU406954	NU206554
Characteristics		
2P - 16 A - 250 V - Screw terminals - With shutters - Installation in 1 gang box		2P - 16 A - 250 V - Screw terminals - Installation in 1 gang box

European sockets

Simple	16 A	10 A	Double
	2 modules	1 modules	
			
 white	NU303318	NU303118	NU206318
 aluminium	NU303330	NU303130	-
 beige	NU303344	NU303144	NU206344
 anthracite	NU303354	NU303154	-
Characteristics			
2P - 250 V - Screw terminals		2P - 16 A - 250 V - Screw terminals - Installation in 1 gang box	
*A residual current circuit protection with a sensitivity of 30 mA must be installed for this product.			

Euroamerican sockets

		Shutterd		Shutterd
	1 module	1 module	2 modules	3 modules
				
white	NU302018	NU302118	NU304118	NU306818
aluminium	-	NU302130	NU304130	-
beige	NU302044	NU302144	-	-
anthracite	-	NU302154	NU304154	-
Characteristics				
16 A - 250 V AC for cylindrical pins 15 A - 125 V AC for flat pins - Screw terminals				
*A residual current circuit protection with a sensitivity of 30 mA must be installed for this product.				

American sockets

15 A	Single	Double
	2 modules	3 module
		
white	NU302818	NU306018
aluminium	NU302830	NU306030
anthracite	NU302854	NU306054
Characteristics		
2P+E - 15 A - Screw terminals - Shutterd		

Italian sockets

16 A	
1 module	
	
white	NU302318
aluminium	NU302330
beige	NU302344
anthracite	NU302354
Characteristics	
2P+E - 16 A - Screw terminals - Shutterd	

British sockets

13 A	
2 modules	
	
white	NU304518
aluminium	NU304530
beige	NU304544
anthracite	NU304554
Characteristics	
2P+E - 13 A - Screw terminals - Shutterd	

Danish sockets

90°	Single	Double	Single EDB	Double EDB
	2 modules	4 modules	2 modules	4 modules
				
☐ white	NU308818	NU309818	NU308918	NU309918
☐ aluminium	NU308830	NU309830	NU308930	NU309930
Characteristics				
• 2P+E - 16 A - 250 V • EDB (Elektronisk Data Behandling) for electronic data processing				

Multistandard sockets

	2 modules	3 modules
		
☐ white	NU308418	NU308518
☐ aluminium	NU308430	-
☐ anthracite	NU308454	-
Characteristics		
• Screw terminals • Shuttered		
*A residual current circuit protection with a sensitivity of 30 mA must be installed for this product.		

Israel sockets

	2 modules
	
☐ white	NU304718
☐ aluminium	NU304730
☐ beige	NU304744
☐ anthracite	NU304754
☐ red	NU304703
Characteristics	
• 2P+E - 16 A • Screw terminals • Shuttered	

Shaver sockets

20 VA	
	
☐ white	MGU5.064.18
☐ aluminium	MGU5.064.30
Characteristics	
• 3 modules • Input: 240 V • Output: 115/240 V	

Accessories

Jumper for Side and Pin Earth sockets-outlets	Jumper for Danish sockets-outlets	Tamperproof accessory
		
NU9091	NU9092	ALB45290
Characteristics		
Set of 10 jumpers for multiple Side and Pin Earth screwless sockets-outlets	Set of 10 jumpers for multiple Danish screwless sockets-outlets	

Centres plates for Side Earth Sockets

2 modules	
	
☐ beige	NU903744
For Unica MGU●●●●●●	
2 modules	
☐ white	NU903718U
☐ beige	NU903744U

Inserts

USB Chargers

USB chargers

	Chargers type A	Chargers type A+C				Charger type C	
2 modules							
							
 white	NU341818	NU301818	NU301918	NU501318	NU501418	NU301518 NU301518E	NU301718
 aluminium	NU341830	NU301830	NU301930	NU501330	NU501430	NU301530 NU301530E	NU301730
 beige	NU341844	-	NU301944	NU501344	NU501444	-	NU301744
 anthracite	NU341854	NU301854	NU301954	NU501354	NU501454	NU301554 NU301554E	NU301754
1 module							
							
 white	NU342818	NU301618	-	-	-	-	-
 aluminium	NU342830	NU301630	-	-	-	-	-
 beige	NU342844	NU301644	-	-	-	-	-
 anthracite	NU342854	NU301654	-	-	-	-	-
Characteristics							
	• NU3418●● Output power: 5 V DC - max 2.1 A • NU3428●● Output power: 5 V DC - 1 A	• NU3018●● output power: 5 V DC - max 2.4 A • NU3016●● Output power: 12 W 5V DC - 2.4 Max each port	Output power: 18W 5V DC - 2.4 Max each port	Output power: Type C 45W + Type A 7.5W	Output power: 65W	• 2P+E - 16 A - 250 V • Screwless terminals • Output power USB: 5 V • Output power: 10.5 W	

Inserts

Data / Phone / TV

RJ45 data sockets

	Cat. 5e UTP straight	Cat. 5e STP straight	Cat. 6 UTP straight	Cat. 6 STP straight	inclined	Cat. 6 FTP straight	Cat. 6A UTP straight	Cat. 6A FTP straight
2 modules								
□ white	NU341118	NU341318	NU341518	NU341718	NU340718	NU341918 NU341918P ⁽¹⁾	-	NU344918
■ aluminium	NU341130	-	NU341530	NU341730	-	NU341930	-	NU344930
■ beige	NU341144	NU341344	NU341544	-	-	-	-	NU344944
■ anthracite	NU341154	-	NU341554	NU341754	-	NU341954	-	NU344954
□ white	NU342018	-	-	NU342618	-	-	-	-
■ aluminium	NU342030	-	-	NU342630	-	-	-	-
■ anthracite	NU342054	-	-	NU342654	-	-	-	-
1 module								
□ white	NU341018	NU341218	NU341418	NU341618	NU340618	NU344718	-	NU344818
■ aluminium	NU341030	-	NU341430	NU341630	-	NU344730	-	NU344830
■ beige	NU341044	NU341244	NU341444	NU341644	-	-	-	NU344844
■ anthracite	NU341054	-	NU341454	NU341654	-	NU344754	-	NU344854
4 modules								
□ white	-	-	NU348218	-	-	-	NU348418	-
□ white	NU347918	-	NU348318	-	-	-	NU348518	-

Characteristics

- Connector Actassi S-One
- Straight : with shutter and label space
- Inclined : with label space

(1) pack of 100

Inserts

Data / Phone / TV

RJ45 centre plates

	For S-One RJ45 connector		For Keystone/Systimax RJ45 connector	
	straight	inclined	straight	inclined
2 modules				
				
white	NU941118	NU940718	NU946118	NU946418
aluminium	NU941130	NU940730	NU946130	NU946430
beige	-	-	NU946144	-
anthracite	NU941154	NU940754	NU946154	NU946454
				
white	NU942218*	NU942418*	-	-
aluminium	NU942230*	NU942430*	-	-
anthracite	NU942254*	NU942454*	-	-
				
white	NU942018	-	-	-
aluminium	NU942030	-	-	-
anthracite	NU942054	-	-	-
1 module				
				
white	NU941018	NU940618	NU946018	-
aluminium	NU941030	NU940630	NU946030	-
beige	-	-	NU946044	-
anthracite	NU941054	NU940654	NU946054	-
4 modules				
				
white	NU947818	-	NU946218	-
aluminium	NU947830	-	NU946230	-
anthracite	-	-	NU946254	-
				
white	NU947918	-	NU946318	-
aluminium	NU947930	-	NU946330	-
anthracite	-	-	NU946354	-

Characteristics

- Straight: with shutter and label space
- Inclined: with label space
- Type: SLIM, except * DPM
- * Type: DPM

Optical fibre centre plates

	SC/SC APC Simplex	SC/SC APC duplex
2 modules		
		
white	NU943918	NU943818
aluminium	NU943930	NU943830
anthracite	NU943954	NU943854
Characteristics		
• Support to receive any SC simplex and duplex adapters • Support to receive Actassy optical fibre adapters: - SC Duplex multi mode adapters: ref. n° VDIB6031001 and VDIB6031002 - SC Duplex single mode adapters: ref. n° VDIB6032001 and VDIB6032002 - SC APC Duplex single mode adapter: ref. n° VDIB6082001 - SC APC Simplex single mode adapter: ref. n° VDIB6072001.		

Inserts

Data / Phone / TV

Telephone sockets

	RJ12 connector	French standard phone jack	British telephone socket
2 modules			
			
☐ white	NU349718	NU349618	-
☐ aluminium	NU349730	NU349630	-
☐ beige	NU349744	-	-
☐ anthracite	-	NU349654	-
1 module			
			
☐ white	NU349118	-	NU349918
☐ aluminium	NU349130	-	NU349930
☐ beige	NU349144	-	NU349944
☐ anthracite	NU349154	-	NU349954

Multimedia sockets

	VGA	Mini Jack	HDMI	RCA	Data Sockets
1 module					
					
☐ white	NU343218	NU343318	NU343018	NU343118	NU342918
☐ aluminium	NU343230	NU343330	NU343030	NU343130	NU342930
☐ beige	-	-	NU343044	-	-
☐ anthracite	NU343254	NU343354	NU343054	NU343154	NU342954
Characteristics					USB 2.0

Inserts

Data / Phone / TV

TV sockets


	TV		TV/FM			R-TV/SAT			FM/TV/SAT
	male, individual	female, individual	individual	intermediate	terminal	individual	intermediate	terminal	individual (1 cable)
2 modules									
									
☐ white	NU346218	-	NU345118	NU345318	NU345218	NU345418	NU345618	NU345518	NU345018
☐ aluminium	NU346230	-	NU345130	-	NU345230	NU345430	-	-	NU345030
☐ beige	NU346244	-	NU345144	-	-	NU345444	-	-	NU345044
☐ anthracite	NU346254	-	NU345154	-	NU345254	NU345454	-	NU345554	NU345054
1 module									
									
☐ white	NU346118	NU346818	-			-			-
☐ aluminium	NU346130	NU346830	-			-			-
☐ beige	-	NU346844	-			-			-
☐ anthracite	NU346154	NU346854	-			-			-

	M-S
2 modules	
	
☐ white	NU545718
☐ aluminium	NU545730
☐ anthracite	NU545754

TV centre plates

	TV/FM	R-TV/SAT
2 modules		
		
☐ white	NU944018	NU944118
☐ aluminium	-	NU944130
☐ anthracite	NU944054	NU944154

Sound inserts

Loudspeakers connectors			Loudspeakers (for Bluetooth)	In-wall Bluetooth receiver	Volume control
	2 modules	1 module			
					
 white	NU348618	NU348718	-	NU360118	NU360218
 aluminium	NU348630	NU348730	-	NU360130	NU360230
 beige	NU348644	NU348744	-	-	NU360244
 anthracite	NU348654	NU348754	-	NU360154	NU360254
			NU3488		
Characteristics					
			2 loudspeakers delivered with 2 cables (5 m, Φ 0.5 mm², red and white) - Impedance: 8 Ω	- Audio receiver 2 modules - voltage: 15-16 V DC - Power supply - voltage: 93-265 V AC - frequency: 47-63 Hz	
			Delivered with: - audio receiver device - power supply		

Light signaling

Signaling light	
12-24 V DC	230 V AC
2 modules	
	
NU3773	NU3772
1 module	
	
NU3774	NU3775
Delivered with green and red papers to include under the centre plate.	

Emergency light

2 modules



NU3776

Characteristics

- 45 lux / 25 cm
- Integrated battery
- 230 V AC

Sound signaling

	Buzzer	Electronic doorbell
2 modules		
		
☐ white	NU378518	NU378618
☐ aluminium	NU378530	NU378630
☐ beige	NU378544	NU378644
☐ anthracite	NU378554	NU378654
Characteristics		
230 V AC, 50/60 Hz		
Acoustic level: adjustable from 76 to 80 dB/1 m		- Acoustic level: 70 dB/1m 5 melodies - Maximum connected in parallel to the output: - 10 without lamp - or 3 with lamp

Inserts

Other functions

WiFi repeater

WiFi repeater	
2 modules	
	
☐ white	NU360518
Characteristics	
- Repeats the WiFi signal received from the Internet box to extend its receiving coverage in housing - Time programming to define ranges for signal on and signal off - Signal coverage: 15 m (indoor) - Data speed: max 300 Mbps - Communication standard: WiFi 802.11 b/g/n 2.4 GHz 100-240 V AC - 50/60 Hz - Pairing mode: WPS (pairing method also featured on most routers) and through HTML pages	

Bed side lamp

Lamp+USB charger type A	
	
☐ white	NU360318
☐ aluminium	NU360330
☐ beige	NU360344
☐ anthracite	NU360354
Characteristics	
- Lamp 2 W - USB 5 V DC - max 2.1 A	

Cable Outlets

16 A	
2 modules	
	
☐ white	NU386218
☐ aluminium	NU386230
☐ beige	NU386244
☐ anthracite	NU386254
Characteristics	
cable diameter: from 6 to 12 mm	

Protection

16 A	Fuse holder	Residual current device switch
1 module		
		
☐ white	NU363118	NU361218



Blind covers

Blind covers			
	2 modules	1 module	1/2 module (2 x)
			
☐ white	NU986618	NU986518	NU986418
☐ aluminium	NU986630	NU986530	NU986430
☐ beige	NU986644	NU986544	NU986444
☐ anthracite	NU986654	NU986554	NU986454

Inserts

Dedicated trunking applications

Sockets

	90°	45°			Surface	Tamperproof		
	2 modules	2 modules	4 modules	6 modules	2 modules	2 modules	4 modules	6 modules
								
☐ white	NU305920T	NU304918T	NU306918T	NU307918T	NU305218T	-	-	-
☒ red	NU305903T	NU304903T	NU306903T	NU307903T	NU305203T	NU305103T	NU306103T	NU307103T

Characteristics

- 2P+E - 16 A - 250 V
- With shutters
- Screwless terminals (except NU305103T)

RJ45 centre plates

	For S-One RJ45 connector straight
2 modules	
	
☐ white	NU941118T
Characteristics	
With shutter and label space	

Unica Inserts with Fixing Frame

















Content

Switches	82
Specialized controls	84
Comfort devices	85
Sockets	87
USB chargers	88
Data / Phone / TV	89
Other functions	91

Inserts with fixing frame

Switches



10 AX - 250 V AC switches

	Standard			With location lamp			IP44
	one-way	two-way	intermediate	one-way	two-way	intermediate	
							
2 modules							
							
□ white	NU520118	NU520318	NU520518	NU520118N	NU520318N	NU520518N	NU528218
■ aluminium	NU520130	NU520330	NU520530	NU520130N	-	-	NU528230
■ beige	NU520144	NU520344	NU520544	NU520144N	NU520344N	-	NU528244
■ anthracite	NU520154	NU520354	NU520554	NU520154N	NU520354N	NU520554N	NU528254
2 x 1 module							
							
□ white	NU521118	NU521318	NU521518	NU521118N	NU521318N	-	-
■ aluminium	NU521130	NU521330	NU521530	NU521130N	NU521330N	-	-
■ beige	NU521144	NU521344	NU521544	NU521144N	NU521344N	-	-
■ anthracite	NU521154	NU521354	NU521554	NU521154N	NU521354N	-	-
Characteristics							
- Connection: screwless terminals - Cables: 1 to 2.5 mm² rigid/flexible						- Screwless terminals - Cables: 1 to 2.5 mm² rigid/flexible	

10 AX - 250 V AC switches

	Control unit
2 modules	
	
□ white	NU521718
■ aluminium	NU521730
■ anthracite	NU521754

10 A - 250 V AC push-buttons

	NO
	
2 modules	
	
□ white	NU520618
■ beige	NU520644
■ anthracite	NU520654
Characteristics	
- Connection: screwless terminals - Cables: 1 to 2.5 mm² rigid/flexible - Lightable with NU9825A, NU9823AM and NU9825AZ LED lamps and rockers with visor	


Inserts with fixing frame

Switches

Accessories - Lamps

LED lamps	12-24 V DC	250 V AC	
	white	red	white
			
	NU9823AM	NU9825A	NU9825AZ
Characteristics			
Consumption	0.15 mA	1,5 mA	0,05 mA

Spring to transform a switch to push-button




S520299

Characteristics

10 units delivered with a positioning aid tool



Accessories - Rockers

Rockers	without symbol	with visor	for Unica with MGUx.xxx.xx references
2 modules			
			
☐ white	NU920018	NU920018N	-
☐ aluminium	NU920030	NU920030N	-
☐ beige	NU920044	NU920044N	NU920044U
☐ anthracite	NU920054	NU920054N	-
1 module			
			
☐ white	NU910018	NU910018N	-
☐ aluminium	NU910030	NU910030N	-
☐ beige	NU910044	NU910044N	NU910044U
☐ anthracite	NU910054	NU910054N	-

Inserts with fixing frame

Specialized controls




Shutters control

	Push-button - 6 A	Switch - 6 A
2 modules		
☐ white	NU520718	NU520818
☒ anthracite	NU520754	NU520854

Inserts with fixing frame

Comfort devices

Dimmers

Universal		Compensation module LED
2 modules		
		
☐ white	NU551418	
☐ aluminium	NU551430	
☐ beige	NU551444	
☐ anthracite	NU551454	
Load compensation module		
		CCT90501
Maximum loads		
LED lamp 230 V 	RC: 5...100 VA RL: 5...20 VA	
incandescent lamp 230 V 	5...200 W	
halogen lamp 230 V 	5...150 W	
LV electronic halogen transformer 	5...150 VA	
lamps 12 V wound transformer 	5...150 VA	
Characteristics		
- Remote control by unlimited number of auxiliary push-button - Automatic load detection - Wire configuration without neutral - Screw terminal connection - Memory function - Automatic overload protection, overheating protection, short-circuit protection		- Rated voltage: 230 VAC - Frequency range: 50 - 60 Hz - Power loss: 2 W max - Installation: junction box, in the luminaire or in the sub-distribution panel, wired between neutral and dimmed phase.

Thermostats

	Room - 8 A	Floor - 10 A
2 modules		
		
☐ white	NU550118	NU550318
☐ aluminium	NU550130	NU550330
☐ beige	NU550144	NU550344
☐ anthracite	NU550154	NU550354
Characteristics		
	- For heating and air-conditioning - Settings range: + 5 to + 30 °C - Blue and red LED's for conditioning or heating indication	- For floor heating - Settings range: + 5 to + 45 °C - Green LED for voltage supply indication - Red LED for heating indication - Delivered with a 4 m temperature sensor


Inserts with fixing frame

Comfort devices

Motion sensors




With push-button

2 modules



☐ white	NU552518
☐ aluminium	NU552530
☐ beige	NU552544
☐ anthracite	NU552554

Maximum loads

LED lamp 230 V		200 W
incandescent lamp 230 V		2200 W
halogen lamp 230 V		2000 W
motor (single-phase) 230 V		1000 VA
LV electronic halogen transformer		1050 VA
12 V lamps wound transformer		500 VA


Characteristics

- Rated current: 10 A
- Screw terminal connection
- Wire configuration without neutral
- Movement detection area: 8 m frontal, 8 m lateral
- Remote control by unlimited number of auxiliary push-button
- Automatic load detection
- Time delay range: 1...30 min
- Master/slave option; connecting two sensors together for covering larger area

Inserts with fixing frame

Sockets

Side Earth sockets


	With shutters			Without shutters	
	screwless terminal	screw terminal	with lid	screwless terminal	screw terminal
2 modules					
					
□ white	NU505718	NU503718	NU503718TA	NU505618	NU503618
■ aluminium	NU505730	NU503730	NU503730TA	NU505630	NU503630
■ beige	NU505744	NU503744	NU503744TA	NU505644	NU503644
■ anthracite	NU505754	NU503754	NU503754TA	NU505654	NU503654
Characteristics					
• 2P+E - 16 A - 250 V					

90°	IP44 frame	With USB charger
2 modules		
		
□ white	NU508218	NU501718
■ aluminium	NU508230	-
■ beige	NU508244	-
■ anthracite	NU508254	-
Characteristics		
- 2P+E - 16 A - 250 V - Screwless terminals - Shuttered		- Screwless terminals - Cables: 1 to 2.5 mm² rigid/flexible

Centres plates for Side Earth Sockets	
2 modules	
	
■ beige	NU903744
For Unica MGU●●●●●●	
2 modules	
	
□ white	NU903718U
■ beige	NU903744U

Shaver sockets

20 VA	
	
□ white	MGU5.064.18
■ aluminium	MGU5.064.30
Characteristics	
• 3 modules • Input: 240 V • Output: 115/240 V	

	With cover frame	
	simple	double
		
□ white	NU203718	NU206718
■ aluminium	-	NU206730
■ beige	-	NU206744
■ anthracite	-	NU206754
Characteristics		
• Screw terminal • Installation in 1 gang box		

European sockets


Simple	16 A
2 modules	
	
□ white	NU503318
■ aluminium	NU503330
■ beige	NU503344
■ anthracite	NU503354
Characteristics	
• 2P - 250 V • Screw terminal	

Double	with cover frame
	
□ white	NU206318
■ beige	NU206344
Characteristics	
• 2P - 16 A - 250 V • Screw terminal • Installation in 1 gang box	

Inserts with fixing frame

USB chargers

USB chargers

	Charger type A		Charger type A+C		Charger type C	
2 modules						
						
white	NU541818	NU501818	NU501918	NU501318	NU501418	NU501718
aluminium	NU541830	NU501830	NU501930	NU501330	NU501430	-
beige	NU541844	NU501844	NU501944	NU501344	NU501444	-
anthracite	NU541854	NU501854	NU501954	NU501354	NU501454	-
Characteristics						
	USB 2.0					
	- Output power: - NU5418●●: 5 V DC - 1.1 A + 2 A	- Output power: - NU5018●●: 5 V DC - 1.2 A + 2.4 A	Output power: 18 W 5V DC - 2.4 Max each port	Output power: Type C 45W + Type A 7.5W	Output power: 65 W	- Socket outlet: 2P+E - 16 A - 250 V - Output power USB: 5V - Screwless terminals

Inserts with fixing frame

Data / Phone / TV



RJ45 data sockets

RJ45	Cat. 5e UTP zamak fixing frame	Cat. 6 UTP zamak fixing frame
2 modules		
		
□ white	NU541118	NU541518
■ aluminium	NU541130	NU541530
■ beige	NU541144	NU541544
■ anthracite	NU541154	NU541554
2 x1 module		
		
□ white	NU542018	NU542418
■ aluminium	NU542030	-
■ beige	NU542044	-
■ anthracite	NU542054	NU542454
Characteristics		
• Connector Actassi S-One • With shutter and label space		

RJ45 Centre plates

	For Keystone/Systimax RJ45 connector straight
2 modules	
	
■ aluminium	NU546130
Characteristics	
With shutter and label space	


Multimedia sockets

	HDMI	VGA + mini Jack	RCA	Data socket
2 x 1 module				
				
□ white	NU543018	NU593218	NU543118	NU542718
■ aluminium	NU543030	-	-	-
■ beige	NU543044	-	-	-
■ anthracite	NU543054	NU593254	-	-
Characteristics				
	Connector prewired	• Connector prewired • HD15 female • 3,5 mm connector	• Video & audio • 3 connectors	• Data transfer • Screws terminals

Inserts with fixing frame

Data / Phone / TV

TV sockets

	TV male			R-TV/SAT	
	individual	intermediate	terminal	individual	terminal
2 modules					
					
☐ white	NU546218	NU546318	NU546418	NU545418	NU545518
☐ aluminium	NU546230	-	-	-	-
☐ beige	NU546244	-	NU546444	-	-
☐ anthracite	NU546254	-	NU546454	-	-

TV centre plates

	TV/FM	R-TV/SAT
2 modules		
		
☐ white	NU944018	NU944118
☐ aluminium	-	NU944130
☐ anthracite	NU944054	NU944154

Data and TV sockets

Simple	RJ45 + TV
2 x 1 module	
	
☐ white	NU547018
☐ aluminium	NU547030
☐ anthracite	NU547054
Characteristics	
• RJ45 cat. 6 UTP • TV male individual	

Inserts with fixing frame

Other functions

Blind covers

2 modules	
	
☐ white	NU586618
☐ aluminium	NU586630
☐ beige	NU586644
☐ anthracite	NU586654

Light signalling

	Lamp and bell push-button
2 modules	
	
☐ white	NU577718
☐ aluminium	NU577730
☐ anthracite	NU577754

Cable outlets

2 modules	
	
☐ white	NU586218
☐ aluminium	NU586230
☐ beige	NU586244
☐ anthracite	NU586254
Characteristics	
Cable outer diameter: 12 mm	

Sound inserts

	Simple
2 modules	
	
☐ white	NU548618

Unica Inserts with Fixing Frame & Claws







Content

Switches	94
Sockets	96
Data / Phone / TV	97


Inserts with fixing frame and claws

Switches

10 AX - 250 V AC switches

	Standard			With location lamp	
	one-way	two-way	intermediate	one-way	two-way
	1 — L	1 — L 2 —	4 — 2 3 — 1	4 — 2 1 —	4 — 2 1 —
2 modules					
					
□ white	NU520118Z	NU520318Z	NU520518Z	NU520118NZ	NU520318NZ
■ beige	NU520144Z	NU520344Z	-	-	-
2 x 1 module					
					
□ white	NU521118Z	-	-	NU521118NZ	-
■ beige	NU521144Z	-	-	-	-
Characteristics					
• Connection: screwless terminals • Cables: 1 to 2,5 mm² rigid/flexible • Lightable with NU9825A, NU9823AM and NU9825AZ LED lamps and rockers with visor					

10 AX - 250 V AC push-buttons

	NO
	1 — L
2 modules	
	
□ white	NU520618Z
■ beige	NU520644Z
Characteristics	
• Connection: screwless terminals • Cables: 1 to 2,5 mm² rigid/flexible • Lightable with NU9825A, NU9823AM and NU9825AZ LED lamps and rockers with visor	

Inserts with fixing frame and claws

Switches

Accessories - Lamps

LED lamps	12-24 V DC	250 V AC	
	white	red	white
			
	NU9823AM	NU9825A	NU9825AZ
Characteristics			
Consumption	0.15 mA	1,5 mA	0,05 mA

Spring to transform a switch to push-button




S520299

Characteristics

10 units delivered with a positioning aid tool

Accessories - Rockers

Rockers	without symbol	with visor	for Unica with MGUx.xxx.xx references
2 modules			
			
 white	NU920018	NU920018N	-
 aluminium	NU920030	NU920030N	-
 beige	NU920044	NU920044N	NU920044U
 anthracite	NU920054	NU920054N	-
1 module			
			
 white	NU910018	NU910018N	-
 aluminium	NU910030	NU910030N	-
 beige	NU910044	NU910044N	NU910044U
 anthracite	NU910054	NU910054N	-

Inserts with fixing frame and claws

Sockets

Side Earth sockets

	With Shutter Screw terminal	Without Shutter Screw terminal
2 modules		
		
☐ white	NU503718Z	NU503618Z
☒ beige	-	NU503644Z
Characteristics		
2P+E - 16 A - 250 V		

Centres plates for Side Earth Sockets	
2 modules	
	
☒ beige	NU903744
For Unica MGU●●●●●●	
2 modules	
	
☐ white	NU903718U
☒ beige	NU903744U

Inserts with fixing frame and claws

Data / Phone / TV

RJ 45 data sockets

RJ45	Cat. 5e UTP zamak fixing frame
2 modules	
	
☐ white	NU541118Z
☐ beige	NU541144Z
Characteristics	
• Connector Actassi S-One • With shutter and label space	

TV sockets

	TV male individual
2 modules	
	
☐ white	NU546218Z
☐ beige	NU546244Z

Unica

Complete Offer:

Inserts

with

Fixing Frame &

Cover Frame

Content



Switches 100

Sockets 101


Inserts with fixing frame and cover frame

Switches

10 AX - 250 V AC switches

	One-way	Two-way	Double one-way
			
with studio frame			
			
□ white	NU220118D	NU220318D	NU221118D
■ aluminium	NU220130D	NU220330D	NU221130D
■ beige	NU220144D	NU220344D	NU221144D
■ anthracite	NU220154D	NU220354D	NU221154D
Characteristics			
• Connection: screwless terminals • Cables: 1 to 2.5 mm² rigid/flexible • Lightable with NU9825A, NU9823AM and NU9825AZ LED lamps and rockers with visor			


10 AX - 250 V AC push-buttons

	NO
	
2 modules	
	
□ white	NU220618D
■ beige	NU220644D
Characteristics	
• Connection: screwless terminals • Cables: 1 to 2.5 mm² rigid/flexible • Lightable with NU9825A, NU9823AM and NU9825AZ LED lamps and rockers with visor	

Accessories - Lamps

LED lamps	12-24 V DC	250 V AC	
	White	Red	White
			
	NU9823AM	NU9825A	NU9825AZ
Characteristics			
Consumption	0.15 mA	1,5 mA	0,05 mA

Spring to transform a switch to push-button





S520299

Characteristics

10 units delivered with a positioning aid tool

Accessories - Rockers

Rockers	without symbol	with visor	for Unica MGU●●●●●●
2 modules			
			
□ white	NU920018	NU920018N	-
■ aluminium	NU920030	NU920030N	-
■ beige	NU920044	NU920044N	NU920044U
■ anthracite	NU920054	NU920054N	-
1 module			
			
□ white	NU910018	NU910018N	-
■ aluminium	NU910030	NU910030N	-
■ beige	NU910044	NU910044N	NU910044U
■ anthracite	NU910054	NU910054N	-

Inserts with fixing frame and cover frame

Sockets

Side Earth sockets

90°	IP44 frame with SO screws	With studio frame	With shutter and outer plate
2 modules			
			
☐ white	NU003718	NU203618D	NU203718
☐ aluminium	-	NU203630D	-
☐ beige	NU003744	NU203644D	-
☐ anthracite	-	NU203654D	-
Characteristics			
2P+E - 16 A - 250 V			

Unica

Installation: Fixing Frame & Box









Content

Fixing frames	104
Boxes	106






Fixing frame and Box

Fixing frames

Fixing frames for CE60 boxes

1 gang or 2 modules			
Zamak	Plastic	Zamak with paint protector	Plastic with paint protector
			
NU7002	NU7002P	NU7002C	NU7002PC NU7002PCP ⁽¹⁾
(1) pack of 100 units			
Zamak with claws	Plastic with claws		
			
NU7002G	NU7002PG		
2 gangs or 4 modules	3 gangs or 6/8 modules	4 gangs or 10 modules	
Plastic with paint protector	Zamak with paint protector	Zamak with paint protector	
			
NU7004PC	NU7006C	NU7008C	

Fixing frames for rectangular boxes

3 modules		4 modules		7 modules
Zamak	Plastic	Zamak	Plastic	zamak
				
NU7103	NU7103P	NU7104	NU7104P	NU7107
Characteristics				
Delivered with paint protection				

Fixing frames for British boxes

4 modules



NU7404

Fixing frame and Box

Fixing frames




Accessories

Claws	Paint protector	Adaptor	Support for vertical installations
			
NU7892	NU7802	U0.582	2 modules
Characteristics			
• For zamak fixing frames • With green plastic protection		For MGU7.●●● fixing frames	☐ white
			NU9580
			Characteristics
			To install inserts in vertical trunking in right position




Fixing frame and Box

Boxes

Surface boxes

	1 gang	2 gangs	3 gangs	3 modules	4 modules
For Unica Studio cover frames					
					
□ white	NU800218	NU800418	NU800618	NU810318	NU810418
■ beige	NU800244	NU800444	NU800644	-	-
For Unica Pro cover frames					
					
□ white	NU840218	NU840418	NU840618		
■ aluminium	NU840230	NU840430	NU840630		
■ anthracite	NU840254	NU840454	NU840654		



Multifix flush mounting boxes

1 gang	2 gangs	3 gangs	4 gangs
40 mm depth			
			
IMT35914 ⁽¹⁾ IMT35914P ⁽²⁾	IMT35924	IMT35934	IMT35944
50 mm depth			
			
IMT35915	IMT35925	IMT35935	IMT35945

(1) pack of 50 units.

(2) pack of 300 units.

Flush mounting boxes

1 module	3 modules	4 modules
		
MGU8.601	MGU8.603	MGU8.604

Accessories

Divider	
	
IMT35994	IMT35995
Characteristics	
• for 40 mm depth boxes	• for 50 mm depth boxes



Unica

Cover Frames

Content

Standard cover frames 110

Special cover frames 114

Cover frames

Standard cover frames

Unica Deco Essentials

		white	aluminium	anthracite	light grey	taupe
						
1 gang		NU600218	NU600230	NU600254	NU600224	NU600226
2 gangs		NU600418	NU600430	NU600454	NU600424	NU600426
3 gangs		NU600618	NU600630	NU600654	NU600624	NU600626
4 gangs		NU600818	NU600830	NU600854	NU600824	NU600826
5 gangs		NU601018	NU601030	NU601054	-	-

Unica Deco Subtle

		white/silver	anthracite/copper	white/copper	anthracite/silver
					
1 gang		NU600240	NU600241	NU600242	NU600243
2 gangs		NU600440	NU600441	NU600442	NU600443
3 gangs		NU600640	NU600641	NU600642	NU600643
4 gangs		NU600840	NU600841	NU600842	NU600843

Unica Deco Materials


		terracotta	rubber	recycled plastic	chipped wood	slate	translucent white
							
1 gang		NU600271	NU600272	NU600273	NU600274	NU600277	NU600279
2 gangs		NU600471	NU600472	NU600473	NU600474	NU600477	NU600479
3 gangs		NU600671	NU600672	NU600673	NU600674	NU600677	NU600679
4 gangs		NU600871	NU600872	NU600873	NU600874	NU600877	NU600879

Unica


Cover frames

Standard cover frames

Unica Studio

		white	aluminium	beige	anthracite
					
1 gang (2 mod.)		NU200218	NU200230	NU200244	NU200254
2 gangs (2 x 2 mod.)		NU200418	NU200430	NU200444	NU200454
3 gangs (3 x 2 mod.)		NU200618	NU200630	NU200644	NU200654
4 gangs (4 x 2 mod.)		NU200818	NU200830	NU200844	NU200854
5 gangs (5 x 2 mod.)		NU201018	NU201030	NU201044	NU201054
1 module		NU210118	NU210130	NU210144	NU210154
2 modules		NU210218	NU210230	NU210244	NU210254
3 modules		NU210318	NU210330	NU210344	NU210354
4 modules		NU210418	NU210430	NU210444	NU210454
7 modules		NU210718	NU210730	NU210744	NU210754

Unica Studio Color

Front colour	light green		red	plum		chocolate		
Back colour	white	beige	white	white	beige	white	black	beige
								
1 gang (2 mod.)	NU280211	-	NU280213	NU280214	-	NU280216	NU280217	NU280219
2 gangs (2 x 2 mod.)	NU280411	-	NU280413	NU280414	-	NU280416	NU280417	NU280419
3 gangs (3 x 2 mod.)	NU280611	-	NU280613	NU280614	-	NU280616	NU280617	NU280619
4 gangs (4 x 2 mod.)	NU280811	-	NU280813	NU280814	-	NU280816	NU280817	NU280819
3 modules	NU270311	NU270312	NU270313	NU270314	NU270315	NU270316	NU270317	-
4 modules	NU270411	NU270412	NU270413	NU270414	NU270415	NU270416	NU270417	-
7 modules	NU270711	NU270712	NU270713	NU270714	NU270715	NU270716	NU270717	-
Front colour	white	dark grey		light grey	taupe			beige
Back colour	white	white	black	white	white	beige	black	beige
								
1 gang (2 mod.)	NU280218	NU280221	NU280222	NU280224	NU280226	NU280227	NU280228	NU280244
2 gangs (2 x 2 mod.)	NU280418	NU280421	NU280422	NU280424	NU280426	NU280427	NU280428	NU280444
3 gangs (3 x 2 mod.)	NU280618	NU280621	NU280622	NU280624	NU280626	NU280627	NU280628	NU280644
4 gangs (4 x 2 mod.)	NU280818	NU280821	NU280822	NU280824	NU280826	NU280827	NU280828	NU280844
3 modules	NU270318	NU270321	NU270322	NU270324	NU270326	NU270327	NU270328	NU270344
4 modules	NU270418	NU270421	NU270422	NU270424	NU270426	NU270427	NU270428	NU270444
7 modules	NU270718	NU270721	NU270722	NU270724	NU270726	NU270727	NU270728	-

Cover frames

Standard cover frames

Unica Studio Metal

Front colour		bronze			dark aluminium	white aluminium		copper	
Back colour		white	beige	black	black	white	black	white	black
									
1 gang (2 mod.)		NU280250M ⁽²⁾	NU280251M ⁽²⁾	NU280252M ⁽²⁾	NU280253M ⁽²⁾	NU280255M ⁽²⁾	NU280256M ⁽²⁾	NU280257M ⁽²⁾	NU280258M ⁽²⁾
2 gangs (2 x 2 mod.)		NU280450M ⁽²⁾	NU280451M ⁽²⁾	NU280452M ⁽²⁾	NU280453M ⁽²⁾	NU280455M ⁽²⁾	NU280456M ⁽²⁾	NU280457M ⁽²⁾	NU280458M ⁽²⁾
3 gangs (3 x 2 mod.)		NU280650M ⁽²⁾	NU280651M ⁽²⁾	NU280652M ⁽²⁾	NU280653M ⁽²⁾	NU280655M ⁽²⁾	NU280656M ⁽²⁾	NU280657M ⁽²⁾	NU280658M ⁽²⁾
4 gangs (4 x 2 mod.)		NU280850M ⁽²⁾	NU280851M ⁽²⁾	NU280852M ⁽²⁾	NU280853M ⁽²⁾	NU280855M ⁽²⁾	NU280856M ⁽²⁾	NU280857M ⁽²⁾	NU280858M ⁽²⁾
3 modules		NU270350M ⁽²⁾	NU270351M ⁽²⁾	NU270352M ⁽²⁾	NU270353M ⁽²⁾	NU270355M ⁽²⁾	NU270356M ⁽²⁾	NU270357M ⁽²⁾	NU270358M ⁽²⁾
4 modules		NU270450M ⁽²⁾	NU270451M ⁽²⁾	NU270452M ⁽²⁾	NU270453M ⁽²⁾	NU270455M ⁽²⁾	NU270456M ⁽²⁾	NU270457M ⁽²⁾	NU270458M ⁽²⁾
7 modules		NU270750M ⁽²⁾	NU270751M ⁽²⁾	NU270752M ⁽²⁾	NU270753M ⁽²⁾	NU270755M ⁽²⁾	NU270756M ⁽²⁾	NU270757M ⁽²⁾	NU270758M ⁽²⁾
Front colour		gold							
Back colour		white	beige	black					
									
1 gang (2 mod.)		NU280259M ⁽²⁾	NU280260M ⁽²⁾	NU280262M ⁽²⁾					
2 gangs (2 x 2 mod.)		NU280459M ⁽²⁾	NU280460M ⁽²⁾	NU280462M ⁽²⁾					
3 gangs (3 x 2 mod.)		NU280659M ⁽²⁾	NU280660M ⁽²⁾	NU280662M ⁽²⁾					
4 gangs (4 x 2 mod.)		NU280859M ⁽²⁾	NU280860M ⁽²⁾	NU280862M ⁽²⁾					
3 modules		NU270359M ⁽²⁾	NU270360M ⁽²⁾	NU270362M ⁽²⁾					
4 modules		NU270459M ⁽²⁾	NU270460M ⁽²⁾	NU270462M ⁽²⁾					
7 modules		NU270759M ⁽²⁾	NU270760M ⁽²⁾	NU270762M ⁽²⁾					

(1) Sand finish

(2) Mill finish

Unica

Cover frames


Standard cover frames

Unica Studio Outline

	white	yellow	red	plum	chocolate	light grey	aluminium	grey
								
1 gang 	NU230218	-	-	-	-	-	-	-
2 gangs 	NU230418	-	-	-	-	-	-	-
3 gangs 	NU230618	-	-	-	-	-	-	-
4 gangs 	NU230818	-	-	-	-	-	-	-
5 gangs 	NU231018	-	-	-	-	-	-	-
Inner frame								
								
	NU230018	NU230001	NU230013	NU230014	NU230016	NU230024	NU230030	NU230031

	beige	anthracite
		
Inner frame		
	NU230044	NU230054

Unica Pro

	white	aluminium	anthracite
			
1 gang  (2 mod.)	NU400218 NU400218P ⁽¹⁾	NU400230	NU400254
2 gangs  (2 x 2 mod.)	NU400418	NU400430	NU400454
3 gangs  (3 x 2 mod.)	NU400618	NU400630	NU400654
4 gangs  (4 x 2 mod.)	NU400818	NU400830	NU400854
4 modules for double gang box 	NU411418	NU411430	NU411454
6 modules for triple gang box 	NU411618	NU411630	NU411654
8 modules for triple gang box 	NU411818	NU411830	NU411854
10 modules for quadruple gang box 	NU411018	NU411030	NU411054

⁽¹⁾ pack of 100 units

Cover frames

Special cover frames

Thin panels cover frames

	white	aluminium	anthracite
			
1 module 	NU200118	NU200130	NU200154

IP 44 cover frame

	white
	
1 gang (2 mod.) 	NU044218

IP55 cover frame and boxes for CE60

Box cover with lid		Boxes for surface mounting			
		1 gang	2 gangs, horizontal	2 gangs, vertical	3 gangs, horizontal
					
☐ white	MUR39110	MUR39911	MUR39914	MUR39912	MUR39913
☒ anthracite	MUR35110	MUR37911	MUR37914	MUR37912	MUR37713
Characteristics					
	IP55 ⁽¹⁾ - IK06	IP55 ⁽²⁾ - IK08			

(1) when installed in a box or frame.

(2) when completed with covers.

Frames for flush mounting					
	1 gang	1 gang, with claws	2 gangs, horizontal	2 gangs, vertical	3 gangs, horizontal
					
☐ white	MUR39107	MUR39108	MUR39101	MUR39151	MUR39109
☒ anthracite	MUR34107	MUR34108	MUR34101	MUR34151	MUR34109
Characteristics					
	IP55 ⁽²⁾ (on flat/smooth walls only. IP44 ⁽²⁾ if mounted on uneven walls with MUR34007 ref.) / IK08.				

(2) when completed with covers.

IP55 cover frame for rectangular boxes

	white	beige
		
3 module 	NU055318	NU055344
4 module 	NU055418	NU055444




Unica Wiser

Content



Wiser by SE 118

Wiser Home 121


Relay switches

10 A	Modular	Assembled with Fixing Frame
2 modules		
		
white	NU353818	NU553818
aluminium	NU353830	NU553830
beige	-	NU553844
anthracite	NU353854	NU553854
Characteristics - Relay switch for various purposes such as weekly scheduling using Wiser App, presence simulation, count down timer - LED indicates when switch is on - Remote control from smartphone or tablet using Wiser App - Remote control by unlimited number of single mechanical push buttons		


Dimmers

	Modular		Assembled with Fixing Frame		Compensation module LED
2 modules	Push-button	Rotary	Push-button	Rotary	
					
white	NU351718	NU351818	NU551718	NU551818	
aluminium	NU351730	NU351830	NU551730	NU551830	
beige	-	-	NU551744	NU551844	
anthracite	NU351754	NU351854	NU551754	NU551854	
Load compensation module					
					CCT90501
Maximum loads					
LED lamp 230 V 	RC: 7...100 VA RL: 7...20 VA	RC: 7...100 VA RL: 7...20 VA	RC: 7...100 VA RL: 7...20 VA	RC: 7...100 VA RL: 7...20 VA	
incandescent lamp 230 V 	14...200 W	14...200 W	14...200 W	14...200 W	
halogen lamp 230 V 	14...150 W	14...150 W	14...150 W	14...150 W	
LV halogen lamps 12 V electronic transformer 	14...150 W	14...150 W	14...150 W	14...150 W	
LV halogen lamps 12 V wound transformer 	14...150 W	14...150 W	14...150 W	14...150 W	
Characteristics					
- Remote control from auxiliary push-buttons - Automatic load detection - Wire configuration without neutral - Memory function - Automatic overload protection, overheating protection, short-circuit protection - Additional functions like wake-up, fall asleep, scheduling and so on. Can be activated using the Wiser App - Automatic load detection - Brightness memory function - Electronic overload, overheating and short-circuit protection			Via Wiser app - Remote control by unlimited number of single mechanical push buttons - Setting the switch-on brightness or memory function (default setting) - Setting the dimming range: minimum and maximum brightness - Setting the LED operating mode manually (RL LED mode) - Setting a timer or a time schedule		
			- Rated voltage: 230 VAC - Frequency range: 50 - 60 Hz - Power loss: 2 W max - Installation: junction box, in the luminaire or in the sub-distribution panel, wired between neutral and dimmed phase.		

Shutters control

	Modular	Assembled with Fixing Frame
2 modules		
☐ white	NU350918	NU550918
☐ aluminium	NU350930	-
☐ beige	NU350944	-
☐ anthracite	NU350954	-
Characteristics		
- Control of blinds locally from the switch or remotely from smartphone or tablet using Wiser App - Weekly scheduling - Astro function - Presence simulation - Can be used for controlling up to 10 multiple relays, each controlling one blind motor - Remote control by unlimited number of double push-buttons, distance: 50 m		
- Protection of the motor against damage with two mutually electrically locked relay contacts - Central control of multiple blind groups push buttons		
Via Wiser app: - Setting the blind movement time - Management of blind and slat position - Upgrade device firmware		

Motion sensors

	Modular		Assembled with Fixing Frame	
	with relay switch	with dimmer	with relay switch	with dimmer
2 modules				
☐ white	NU352618	NU352718	NU552618	NU552718
☐ aluminium	NU352630	NU352730	-	-
☐ beige	NU352644	NU352744	-	-
☐ anthracite	NU352654	NU352754	-	-
Maximum loads				
LED lamp 230 V 	200 W	RC: 7...100 VA RL: 7...20 VA	200 W	RC: 7...100 VA RL: 7...20 VA
compact fluorescent lamp 	200 W	-	200 W	-
incandescent lamp 230 V 	2200 W	14...200 W	2200 W	14...200 W
halogen lamp 230 V 	2000 W	14...150 W	2000 W	14...150 W
LV halogen lamps 12 V 	1050 VA	14...150 W	1050 VA	14...150 W
electronic transformer				
wound transformer 	500 VA	14...150 W	500 VA	14...150 W
Characteristics				
- Wire configuration with neutral - Movement detection area 8 m frontal, 8 m lateral - Movement detection angle: 160 ° - Configuration with time delay range, triggering light level... is done using the Wiser App - Built-in push button switch for dim (only with dimmer version) and on/off switching - Automatic mode: Automatic switching ON of loads when a motion is detected and dependent on the ambient brightness - Manual operation: Local switching ON of loads when the switch is actuated, irrespective of the ambient brightness - Semi-automatic mode: Manual switch-ON/automatic switch-OFF - Remote control by unlimited number of single mechanical push buttons				
Via Wiser app: - Setting the detection brightness: 5 to 1000 lux (default setting 50 lux) - Setting the detection sensitivity: High (default setting), medium or low - Setting the detection sensitivity: High (default setting), medium or low - Setting the overtravel time: 1 second to 30 minutes (default setting 5 minutes) - Setting a timer or a time schedule				
See Dimmers for others characteristics				


Schneider Electric


Download
Wiser App
Schneider Electric's connected
technology for homes



Connected wireless switches

Assembled with Fixing Frame	
1-2 gangs	
	
☐ white	NU557118
☐ aluminium	NU557130
☐ beige	NU557144
☐ anthracite	NU557154

Connected sockets

16 A	German socket
	
☐ white	NU555718
☐ aluminium	NU555730
☐ beige	NU555744
☐ anthracite	NU555754



Relay switches

10 A	Modular
2 modules	
	
☐ white	NU353718W
☐ aluminium	NU353730W
☐ graphite	NU353754W
Characteristics	
- Relay switch for various purposes such as weekly scheduling using Wiser App, presence simulation, count-down timer - LED indicates when switch is on - Remote control from smartphone or tablet using Wiser App - Remote control by unlimited number of single mechanical push buttons	
Via Wiser app	
- Setting a timer: delay time (1 second - 24 hours), prewarning (with or without), manual switching (off or retrigger) - Setting a time schedule (weekday switching, astro function, count-down timer, presence simulation).	

Shutters control

	Modular
2 modules	
	
☐ white	NU350818W
☐ aluminium	NU350830W
☐ anthracite	NU350854W
Characteristics	
- Control of blinds locally from the switch or remotely from smartphone or tablet using Wiser App - Weekly scheduling - Astro function - Presence simulation - Can be used for controlling up to 10 multiple relays, each controlling one blind motor - Remote control by unlimited number of double push-buttons, distance: 50 m - Protection of the motor against damage with two mutually electrically locked relay contacts - Central control of multiple blind groups push buttons	
Via Wiser app:	
- Setting the blind movement time - Management of blind and slat position - Upgrade device firmware	

Dimmers


Modular		Compensation module LED		
2 modules		Push-button	Rotary	
				
☐ white		NU351518W	NU351618W	
☐ aluminium		NU351530W	NU351630W	
☐ graphite		NU351554W	NU351654W	
Load compensation module				
				CCT90501
Maximum loads				
LED lamp 230 V		RC: 7...100 VA RL: 7...20 VA	RC: 7...100 VA RL: 7...20 VA	
incandescent lamp 230 V		14...200 W	14...200 W	
halogen lamp 230 V		14...150 W	14...150 W	
LV halogen lamps 12 V	electronic transformer 	14...150 W	14...150 W	
	wound transformer 	14...150 W	14...150 W	
Characteristics				
- Remote control from auxiliary push-buttons - Automatic load detection - Wire configuration without neutral - Memory function - Automatic overload protection, overheating protection, short-circuit protection - Additional functions like wake-up, fall asleep, scheduling. Can be activated using the Wiser App - Automatic load detection - Brightness memory function - Electronic overload, overheating and short-circuit protection		- Rated voltage: 230 VAC - Frequency range: 50 - 60 Hz - Power loss: 2 W max. - Installation: junction box, in the luminaire or in the sub-distribution panel, wired between neutral and dimmed phase.		
- Via Wiser app - Remote control by unlimited number of single mechanical push buttons - Setting the switch-on brightness or memory function (default setting) - Setting the dimming range: minimum and maximum brightness - Setting the LED operating mode manually (RL LED mode) - Setting a timer or a time schedule				



Connected sockets

16 A	Pin Earth socket
	
☐ white	NU555918
☐ aluminium	NU555930
☐ anthracite	NU555954

Connected wireless switches

Modular	1-2 gangs
	
☐ white	NU557118W
☐ aluminium	NU557130W
☐ anthracite	NU557154W



Unica

KNX


Content

Controls

126

The following Unica control devices have to be connected to KNX bus line.
The KNX bus line is laid in parallel to the 230 V power supply.
When Unica sensor is activated, an actuator (e.g. the roller shutter control) will carry out all the switching commands required.

Introduction

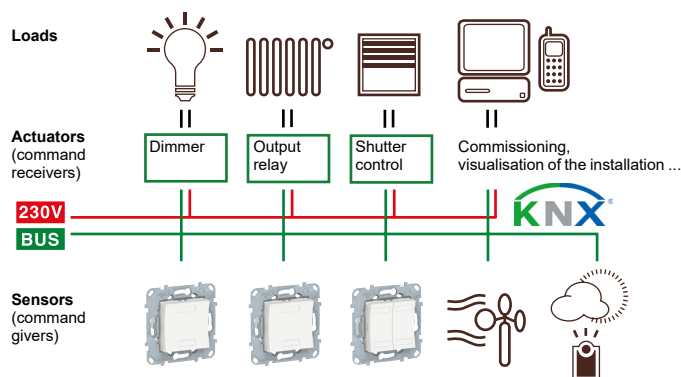

KNX Push-buttons

Push-buttons	2 buttons and 2 blue status LEDs, with screwless bus connecting terminals	4 buttons and 4 blue status LEDs, with screwless bus connecting terminals
2 modules		
☐ white	NU553018	NU553118
☐ aluminium	NU553030	NU553130
☐ anthracite	NU553054	NU553154
Characteristics		
- The status LED is located under the symbol window which can be taken off. - With integrated bus coupler. The bus is connected using a bus connecting terminal. Contents: - With set of 10 symbols: 2 x symbol with light opening, 1 x symbol "1", 1 x symbol "0", 2 x symbol for dimming, 2 x symbol for shutter, 2 x symbol (neutral). - With bus connecting terminal.		- The status LED is located under the symbol window which can be taken off. - With integrated bus coupler. The bus is connected using a bus connecting terminal. Contents: - With set of 20 symbols: 4 x symbol with light opening, 2 x symbol "1", 2 x symbol "0", 4 x symbol for dimming, 4 x symbol for shutter, 4 x symbol (neutral). - With bus connecting terminal.
KNX software functions: Switching, toggling, dimming (single/dual-surface), blind (single/dual-surface), pulse edges trigger 1-, 2-, 4- or 8-bit telegrams (distinction between short and long operation), pulse edges with 2-byte telegrams (distinction between short and long operation), 8-bit linear regulator, scene retrieval, scene saving, disable functions.		



Unica

Antibacterial offer




Content

Switches	130
Specialized controls	132
Comfort devices	133
Sockets	134
Sockets	135
Data / Phone / TV	136
Other functions	137
Wiser Home functions	138
Cover frames	139
System+	140



Antibacterial offer

Switches

10 AX - 250 V AC switches

	One-way	Two-way	Intermediate
			
2 modules			
☐ white antibacterial	NU320120	NU320320	NU320520
1 module			
☐ white antibacterial	NU310120	NU310320	NU310520
Characteristics			
• Connection: screwless terminals • Cables: 1 to 2,5 mm² rigid/flexible • Lightable with NU9825A, NU9823AM and NU9825AZ LED lamps and rockers with visor			

10 A - 250 V AC push-buttons

	NO without symbol	NO/NC with label holder	NO with location lamp without symbol
			
2 modules			
☐ white antibacterial	NU320620	NU324620	NU320620N
1 module			
☐ white antibacterial	NU310620		
Characteristics			
• Connection: screwless terminals • Cables: 1.5 to 2.5 mm² rigid/flexible • Lightable with NU9825A, NU9823AM and NU9825AZ LED lamps and rockers with visor			

Unica

Antibacterial offer

Switches

www.se.com

Accessories - Lamps

LED lamps	12-24 V DC	250 V AC	
	white	red	white
			
	NU9823AM	NU9825A	NU9825AZ
Characteristics			
Consumption	0.15 mA	1,5 mA	0,05 mA

Spring to transform a switch to push-button




S520299

Characteristics

10 units delivered with a positioning aid tool

Accessories - Rockers

Rockers	without symbol	with visor
2 modules		
		
☐ white antibacterial	NU920020	NU920020N
1 module		
		
☐ white antibacterial	NU910020	NU910020N


Antibacterial offer

Specialized controls

Fan control

	Two-way - 10 A
2 modules	
	
☐ white antibacterial	NU320320VMC
☐ aluminium	NU320330VMC
☐ anthracite	NU320354VMC

Roller blinds control

	One-way - 6 A
2 modules	
	
☐ white antibacterial	NU320820

Cord push-button



	NO/NC - 10 A
2 modules	
	
☐ white antibacterial	NU322620

Unica

Antibacterial offer

Comfort devices

Dimmer



	Universal	Compensation module LED
2 modules		
☐ white antibacterial	NU351420	
Load compensation module		CCT90501
Maximum loads		
LED lamp 230 V 	RC: 5...100 VA RL : 5...20 VA	
incandescent lamp 230 V 	5...200 W	
halogen lamp 230 V 	5...150 W	
LV halogen lamps 12 V  electronic transformer	5...150 VA	
 wound transformer	5...150 VA	
Characteristics	• Remote control by unlimited number of auxiliary push-button • Automatic load detection • Wire configuration without neutral • Screw terminal connection • Memory function • Automatic overload protection, overheating protection, short-circuit protection	
	• Rated voltage: 230 VAC • Frequency range: 50 - 60 Hz • Power loss: 2 W max. • Installation: junction box, in the luminaire or in the sub-distribution panel, wired between neutral and dimmed phase.	

Antibacterial offer


Sockets

Pin Earth sockets

90°	Standard	Surface	Tamperproof
2 modules			
			
☐ white antibacterial	NU305920	NU305220	-
☒ red	NU305903	NU305203	NU305103
☒ green	NU305906	NU305206	-
Characteristics			
• 2P+E - 16 A - 250 V • With shutters • Screwless terminals (except NU305103)			

45°	Standard			With lamp	Tamperproof		Tamperproof with lamp
	2 modules	4 modules	6 modules	4 modules	4 modules	6 modules	4 modules
							
☐ white antibacterial	NU304920	-	-	-	-	-	-
☒ red	NU304903	NU306903	NU307903	NU306903S	NU306103	NU307103	NU306103S
☒ green	NU304906	NU306906	NU307906	-	-	-	-
Characteristics							
• 2P+E - 16 A - 250 V • With shutters • Screwless terminals							

90°	Standard	Surface	Tamperproof
2 modules			
			
☒ red	NU305903T	NU305203T	NU305103T
Characteristics			
• 2P+E - 16 A - 250 V • With shutters • Screwless terminals (except NU305103T)			

45°	Standard			Tamperproof	
	2 modules	4 modules	6 modules	4 modules	6 modules
					
☒ red	NU304903T	NU306903T	NU307903T	NU306103T	NU307103T
Characteristics					
• 2P+E - 16 A - 250 V • With shutters • Screwless terminals					

Unica

Antibacterial offer

Sockets

Side Earth sockets

Standard		
2 modules		
		
☐ white antibacterial	NU303720	NU305720
Characteristics		
• 2P+E - 16 A - 250 V • With shutters • Screw terminals	• 2P+E - 16 A - 250 V • With shutters • Screwless terminals	

45°	Standard	With lamp
4 modules	Screw *	Screw *
		
☐ white	NU306720A	NU306720AS
Characteristics		
• 2P+E - 16 A - 250 V • * for Screw devices - Screw-IPT terminals • With shutters		

Antibacterial offer

Data / Phone / TV

RJ45 Centre plates

	For S-One RJ45 connector		RJ45 Cover Keystone/ Systimax	RJ45 Cover 2 x Keystone/ Systimax	RJ45 Cover 4 x Keystone/ Systimax
	straight	inclined			
2 modules					
					
☐ white antibacterial	NU941120	NU940720	NU946120	-	-
					
☐ white antibacterial	NU942020	-	-	-	-
1 module					
					
☐ white antibacterial	NU941020	NU940620	NU946020	-	-
4 modules					
					
☐ white antibacterial	-	-	-	NU946220	NU946320
Characteristics					
● Straight : with shutter and label space ● Inclined : with label space					

TV sockets

	TV Male, individual	FM/TV/SAT Individual (1 cable)
2 modules		
		
☐ white antibacterial	NU346220	NU345020
1 module		
		
☐ white antibacterial	NU346120	-


TV centre plates

	R-TV/SAT
1 module	
	
☐ white antibacterial	NU944120

Antibacterial offer

Other functions

Blind covers

Blind covers	
2 modules	
	
☐ white antibacterial	NU986620
1 module	
	
☐ white antibacterial	NU986520

Antibacterial offer

Wiser Home functions



Download
Wiser App
Schneider Electric's connected
technology for homes



Relay switches

10 A
2 modules




☐ white
antibacterial **NU353720W**

Characteristics

- Relay switch for various purposes such as weekly scheduling using Wiser App, presence simulation, count-down timer
- LED indicates when switch is on
- Remote control from smartphone or tablet using Wiser App

Connected wireless switches

Modular
1-2 gangs



☐ white antibacterial **NU557120W**

Dimmers

	Push-button	Rotary	Compensation module LED
2 modules			



☐ white antibacterial

NU351520W

NU351620W

Load compensation module

CCT90501

Maximum loads

LED lamp 230 V		RC: 7...100 VA RL: 7...20 VA	RC: 7...100 VA RL: 7...20 VA	
incandescent lamp 230 V		14...200 W	14...200 W	
halogen lamp 230 V		14...150 W	14...150 W	
LV halogen lamps 12 V	electronic transformer	14...150 W	14...150 W	
	wound transformer	14...150 W	14...150 W	

Characteristics

- Remote control from auxiliary push-buttons
- Automatic load detection
- Wire configuration without neutral
- Memory function
- Automatic overload protection, overheating protection, short-circuit protection
- Additional functions like wake-up, fall asleep, scheduling... can be activated using the Wiser App
- Rated voltage: 230 VAC
- Frequency range: 50 - 60 Hz
- Power loss: 2 W max.
- Installation: junction box, in the luminaire or in the sub-distribution panel, wired between neutral and dimmed phase.

Shutters control

Wiser France
2 modules



☐ white antibacterial **NU350820W**

Characteristics

- Control of blinds locally from the switch or remotely from smartphone or tablet using Wiser App
- Weekly scheduling
- Astro function
- Presence simulation
- Can be used for controlling up to 10 multiple relays, each controlling one blind motor

Antibacterial offer

Cover frames

Unica Pro

		white antibacterial
		
1 gang (2 mod.)		NU400220
2 gangs (2 x 2 mod.)		NU400420
3 gangs (3 x 2 mod.)		NU400620
4 modules		NU411420
6 modules		NU411620



Unica

Antibacterial offer

System+

www.se.com

Surface mounting workstations

	2 rows x 8 modules	2 rows x 10 modules	2 columns	3 columns	4 columns
					
☐ white antibacterial	NU121820	NU121020	NU122420	NU123420	NU124420



Flush mounting workstations

	2 rows x 8 modules	2 rows x 10 modules	3 columns
			
☐ white antibacterial	NU171820	NU171020	NU173420

Horizontal cover frames

	2 rows x 8 modules	2 rows x 10 modules
Cover frames		
		
☐ white antibacterial	NU021820	NU021020

Horizontal surface boxes

	2 rows x 8 modules	2 rows x 10 modules
Surface boxes		
		
☐ white antibacterial	NU821820	NU821020

Unica System+

Content

Complete workstations	144
Horizontal centralizations	145
Vertical centralizations	146
Accessories	147


Unica System+

Complete workstations

Horizontal
surface mounting workstations

	2 rows x 8 modules	2 rows x 10 modules
		
 white	NU121820	NU121020
 aluminium	NU121830	NU121030
 anthracite	NU121854	NU121054

Vertical
surface mounting workstations

	2 columns x 4 modules	3 columns x 4 modules	4 columns x 4 modules
			
 white	NU122418	NU123418	NU124418
 aluminium	NU122430	NU123430	NU124430
 anthracite	NU122454	NU123454	NU124454

Horizontal
flush mounting workstations

	2 rows x 8 modules	2 rows x 10 modules
		
 white	NU171820	NU171020
 aluminium	NU171830	NU171030
 anthracite	NU171854	NU171054



Vertical
flush mounting workstations

	2 columns x 4 modules	3 columns x 4 modules	4 columns x 4 modules
			
 white	NU172418	NU173418	NU174418
 aluminium	NU172430	NU173430	NU174430
 anthracite	NU172454	NU173454	NU174454


Unica System+

Horizontal centralizations

Surface mounting boxes

	3 gang 8 modules	4 gang 10 modules
		
☐ white	NU821820	NU821020
☐ aluminium	NU821830	NU821030
☐ anthracite	NU821854	NU821054

Flush mounting boxes

	3 gang 8 modules	4 gang 10 modules
		
	NU8718	NU8710



Cover frames

	2 row x 8 module	2 row x 10 module
Cover frame with fixing frame		
		
☐ white	NU021820	NU021020
☐ aluminium	NU021830	NU021030
☐ anthracite	NU021854	NU021054



Unica System+

Vertical centralizations

Surface mounting boxes

	2 columns x 4 modules	3 columns x 4 modules	4 columns x 4 modules
			
☐ white	NU822418	NU823418	NU824418

Flush mounting boxes

	2 columns x 4 modules	3 columns x 4 modules	4 columns x 4 modules
			
	NU8724	NU8734	NU8744

Cover frames

	2 columns	3 columns	4 columns
Cover frame with fixing frame			
			
☐ white	NU022418	NU023418	NU024418


Kits (inserts with cover frames)

	2 columns	3 columns	4 columns
			
☐ white	NU112118	NU113118	NU114118
	2 German sockets-outlets + 2 Centre plates without RJ45 connectors	2 German sockets-outlets + 2 German red sockets-outlets + 2 Centre plates without RJ45 connectors	4 German sockets-outlets + 2 German red sockets-outlets + 2 Centre plates without RJ45 connectors

Unica System+

Accessories

Mounting accessories

Fixing frame	Metal divider for flush mounting boxes		DIN rail adapter
			
NU7204P	NU9802	NU9801	NU9800
Characteristics			
For vertical solutions			For Acti9 devices installation (1 or 2 modules of 18 mm)

Unica

Technical Information

Content

Dimensions 150

Fixing frames 150

Cover frames 152

Fixing frames and Cover frames 153

Boxes 154

Connections 157

Switches 157

Comfort devices 160

Sockets 161

Wiser 162

Data / Phone / TV 163


USB chargers 164

Other functions 165

RJ45 data sockets 167


Universal fixing frame

NU7002●●

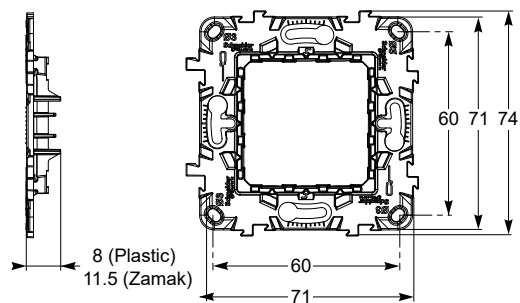


Zamak and plastic (2 modules)

NU7103●●

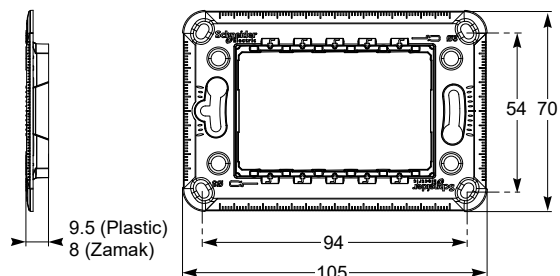


Zamak and plastic (3 modules)

NU7104●●

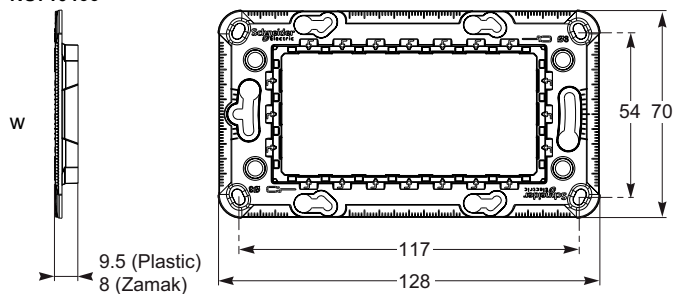

Zamak and plastic (4 modules)


NU7107

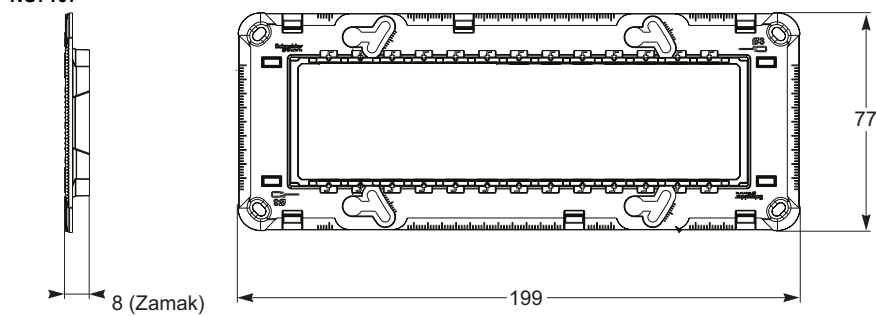

Zamak (7 modules)


Multigang fixing frames

NU7004PC

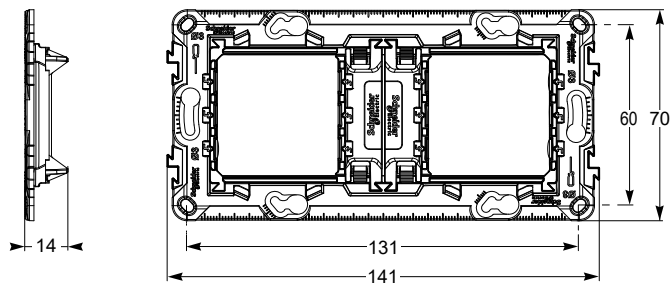


Plastic (2 gangs or 4 modules)

NU7006C

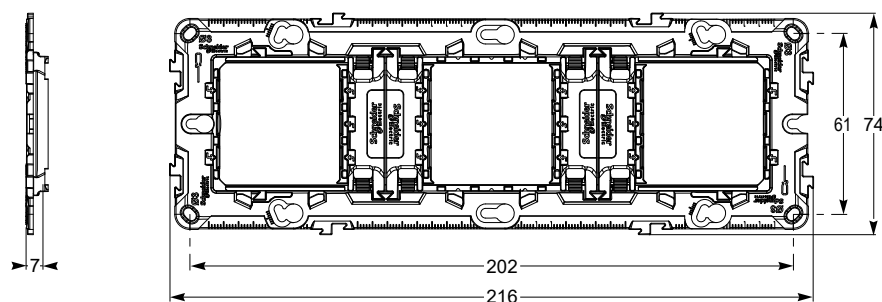

Zamak (3 gangs or 6/8 modules)

NU7008C

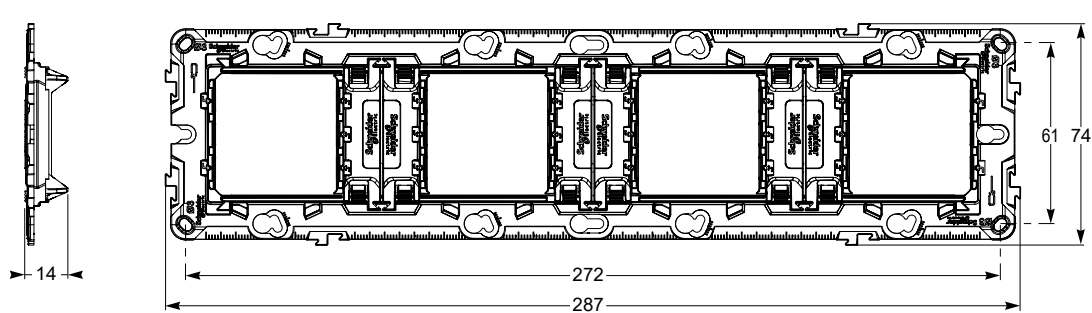

Zamak (4 gangs or 10 modules)

Unica

Dimensions

Cover frames


www.se.com

Gangs

NU200●●●
NU280●●●

NU600●●●

NU400●●●

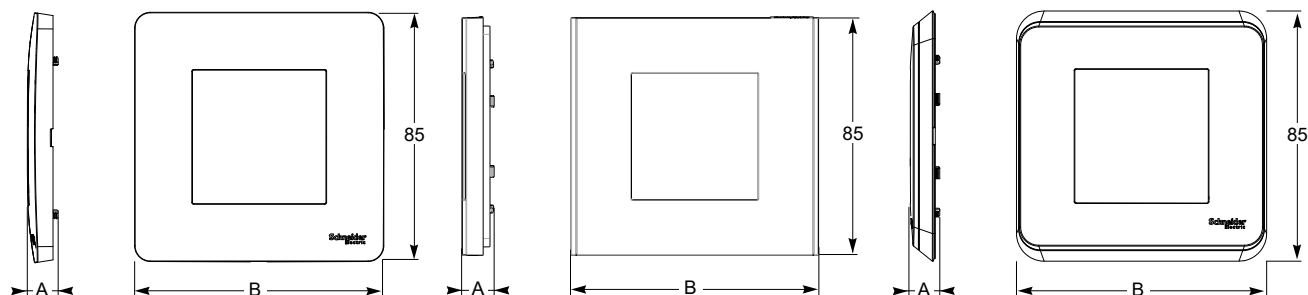

Unica Studio

Unica Deco


Unica Pro

Type	Depth	1 gang	2 gangs	3 gangs	4 gangs	5 gangs
	A	B	B	B	B	B
Unica Studio	10	85	156	227	298	369
Unica Deco	10	88	159	230	301	372
Unica Pro	10	85	156	227	298	-


Modules

NU210●●●
NU270●●●

NU411●●●

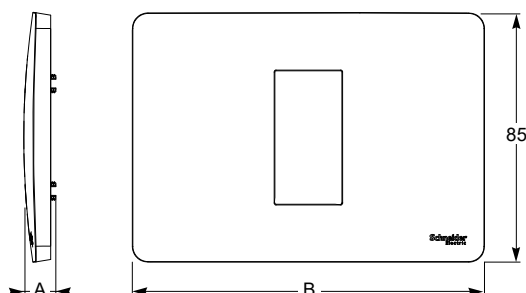

Unica Studio
Unica Studio Color
Unica Studio Metal

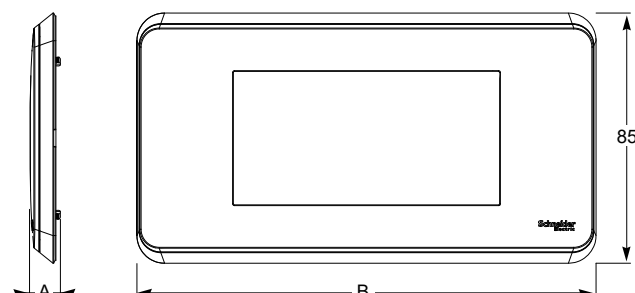


Unica Pro

Type	Depth	1, 2, 3 modules	4 modules	7 modules
	A	B	B	B
Unica Studio	10	120	142	210

Type	Depth	4 modules	6, 8 modules	10 modules
	A	B	B	B
Unica Pro	10	156	227	298

IP55 frames

NU055●●●

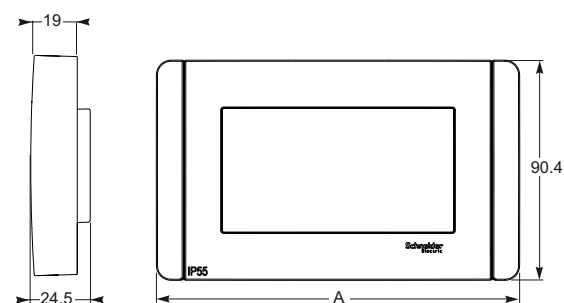


Type	3 modules	4 modules
	A	A
IP55	126	148.5

Dimensions

Fixing frames and Cover frames

Fixing frames

NU7204P




Cover frames


NU0218●●: 3 gangs - 6 or 8 modules

NU0210●●: 4 gangs - 10 modules

NU02●418: 2,3 and 4 columns - 4 modules

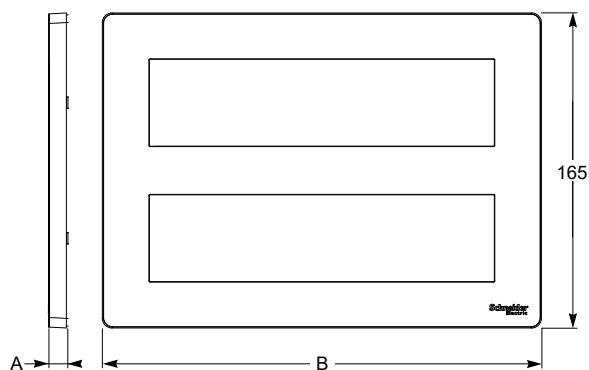

Horizontal cover frame

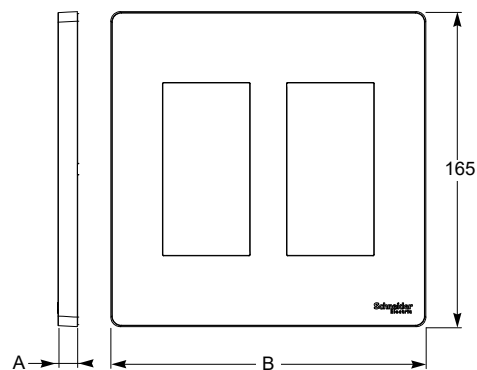


Vertical cover frame


Type	Depth	3 gangs 6 or 8 modules	4 gangs 10 modules	2 columns 4 modules	3 columns 4 modules	4 columns 4 modules
	A	B	B	B	B	B
Cover frames	10	230	300	165	230	300

Surface mounting boxes

NU800xyy

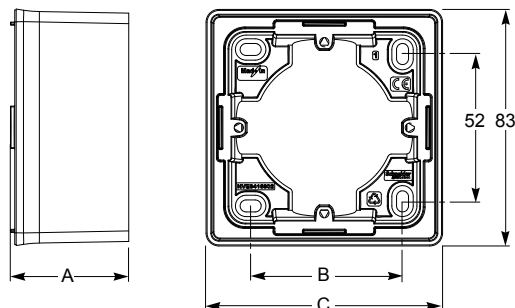

NU840xyy

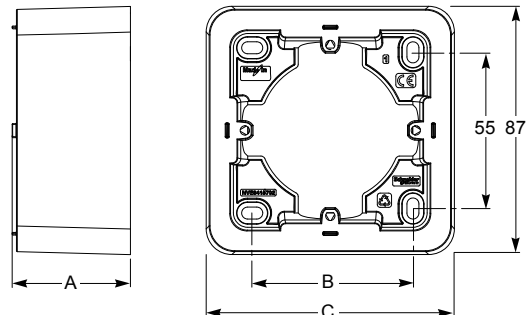

Unica Studio surface mounting boxes


Unica Pro surface mounting boxes

Type	Depth	1 gang		2 gangs		3 gangs	
	A	B	C	B	C	B	C
Unica Studio	41.5	53	83	124	154	195	224
Unica Pro	41.5	56	87	128	158	199	229

Where x denotes the length of surface mounting boxes.
Where yy denotes the color of surface mounting boxes. .

Flush mounting boxes


IMT359●4: 40 mm depth
IMT359●5: 50 mm depth

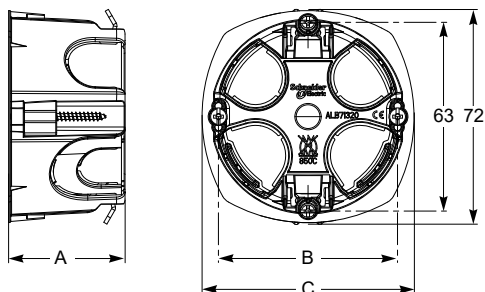

Multifix flush mounting boxes

Type	Depth		1 gang		2 gangs		3 gangs		4 gangs	
	IMT359●4	IMT359●5	B	C	B	C	B	C	B	C
Multifix	40	50	60	71	71	141.5	71 x 2	212,5	71 x 3	283

MGU8.601: 35 mm depth
MGU8.603, MGU8.604: 48 mm depth

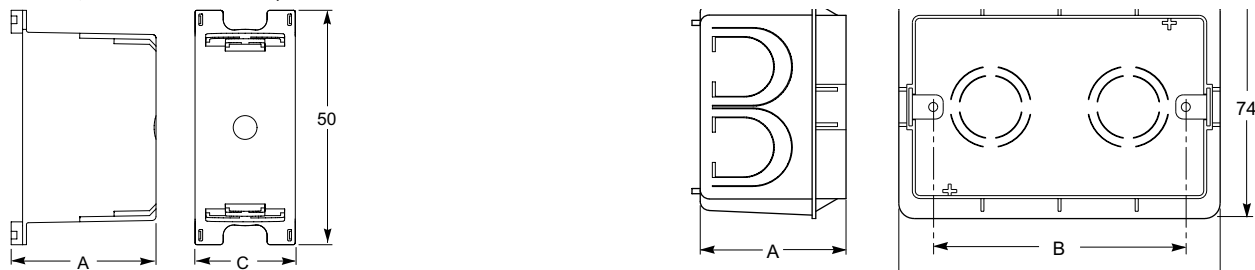


Flush mounting boxes

Type	Depth		1 module	3 modules		4 modules	
	MGU8.601	MGU8.603/604	C	B	C	B	C
Box	35	48	26.5	83.5	106	108	131

Flush mounting boxes


NU8718●●: 3 gangs - 6 or 8 modules

NU8710●●: 4 gangs - 10 modules

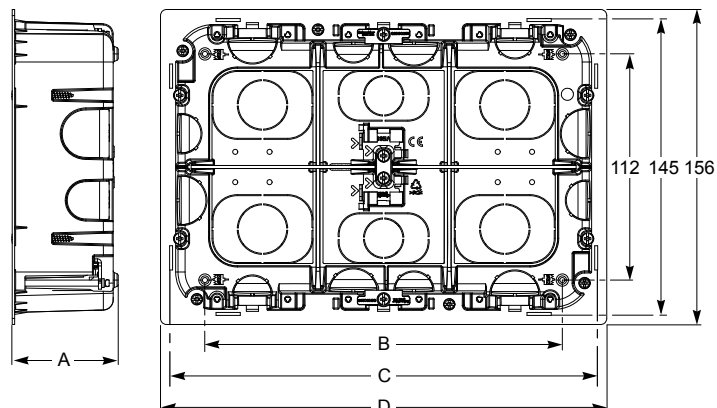

Horizontal flush centralization boxes

NU87●4: 2,3 and 4 columns - 8 modules

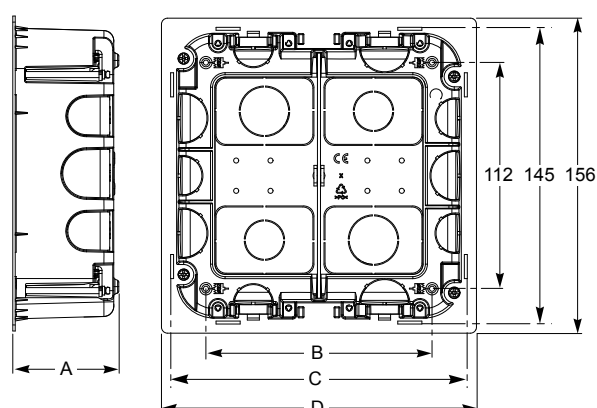


Vertical flush centralization boxes

Type	Depth	3 gangs 6 or 8 modules			4 gangs 10 modules			2 columns 4 modules			3 columns 4 modules			4 columns 4 modules		
	A	B	C	D	B	C	D	B	C	D	B	C	D	B	C	D
Flush mounting boxes	52.5	177	210	221	242	281	292	112	145	156	177	210	221	242	281	292

Centralization boxes


NU8218●●: 3 gangs - 6 or 8 modules

NU8210●●: 4 gangs - 10 modules

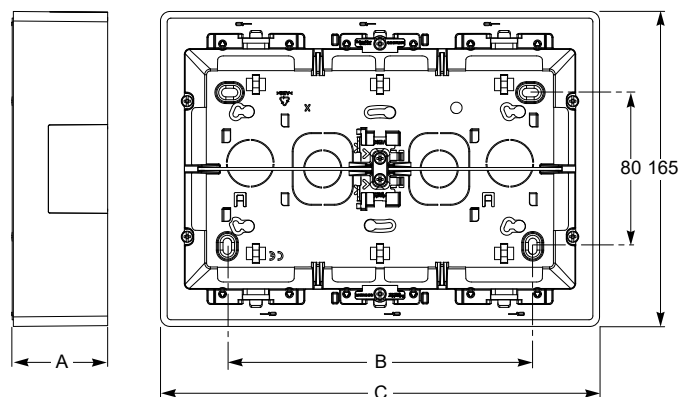

Horizontal centralization boxes

NU82●418: 2,3 and 4 columns - 8 modules

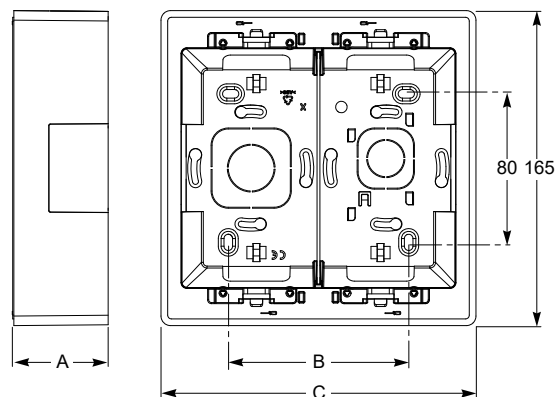


Vertical centralization boxes

Type	Depth	3 gangs 6 or 8 modules		4 gangs 10 modules		2 columns 4 modules		3 columns 4 modules		4 columns 4 modules	
	A	B	C	B	C	B	C	B	C	B	C
Centralization boxes	50	160	230	233	300	94.5	165	160	230	233	300


Flush mounting workstations boxes

NU171●20: 2 rows - 8 or 10 modules

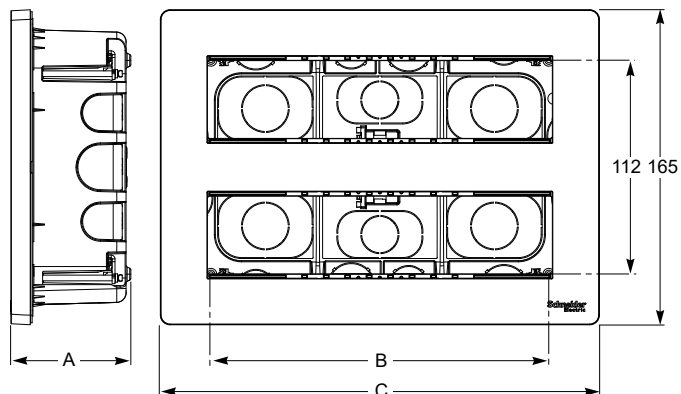

Horizontal flush mounting workstations boxes

NU17●418: 2,3 and 4 columns - 8 modules

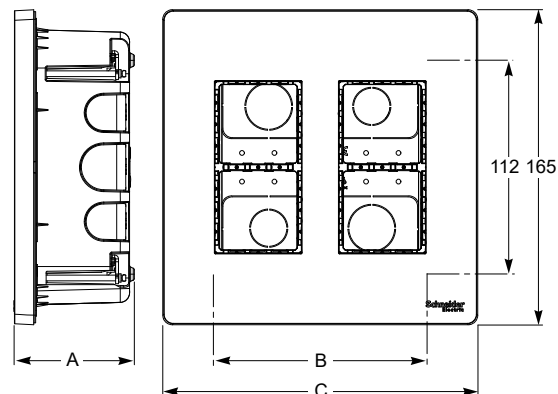


Vertical flush mounting workstations boxes

Type	Depth	2 rows 8 modules		2 rows 10 modules		2 columns 4 modules		3 columns 4 modules		4 columns 4 modules	
		B	C	B	C	B	C	B	C	B	C
Flush mounting workstations boxes	63	177	230	248	300	112	165	177	230	248	300


Surface workstations boxes

NU121●20: 2 rows - 8 or 10 modules

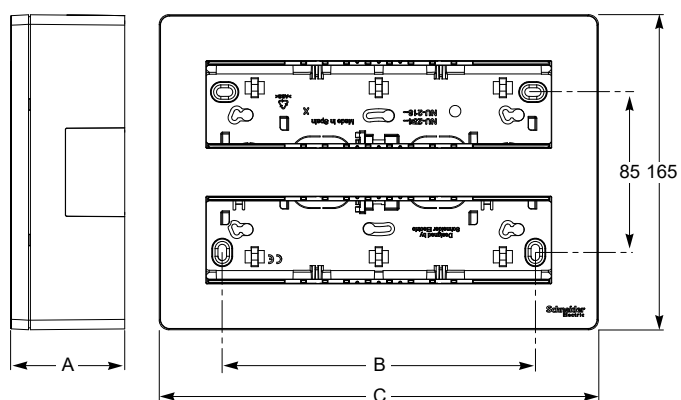

Horizontal surface workstations boxes

NU12●418: 2,3 and 4 columns - 8 modules

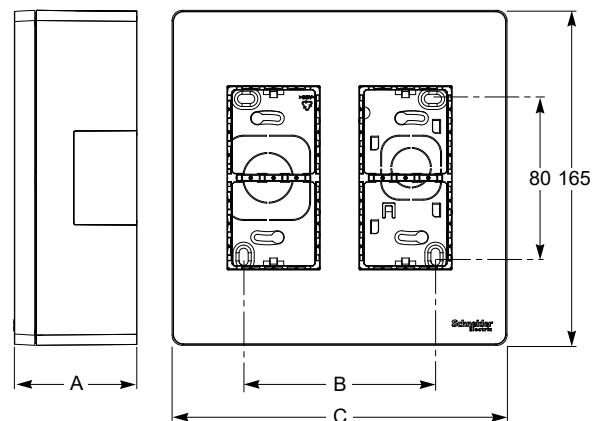


Vertical surface workstations boxes


Type	Depth	2 rows 8 modules		2 rows 10 modules		2 columns 4 modules		3 columns 4 modules		4 columns 4 modules	
		B	C	B	C	B	C	B	C	B	C
Surface workstations boxes	60	160	230	233	300	94.5	165	160	230	233	300

Switches and push-buttons


Connection examples




1 module - One-way switch
Push-button

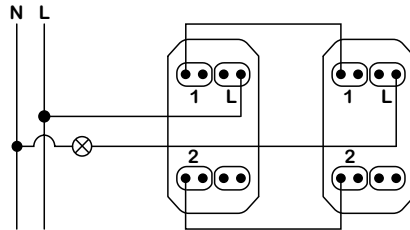


1 module - 2 two-way switches

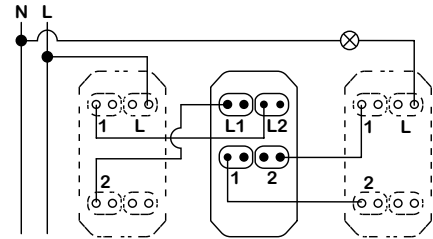


1 module - 2 two-way switches + 1 intermediate switch




2 modules - One-way switch
Push-button

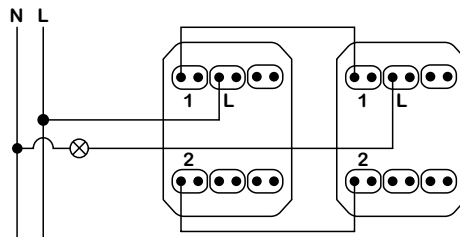

2 modules - Two-way switch




2 poles switch

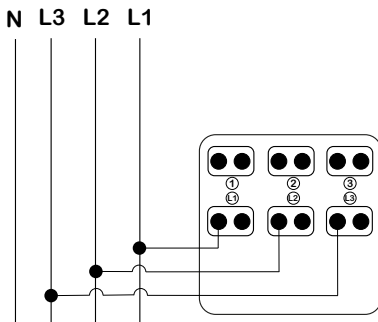


3 poles switch

Switches and push-buttons with indication lamp


Connection examples




1 module - One-way switch with indication lamp




1 module - 2 two-way switches with indication lamp




Double pole switch with indication lamp

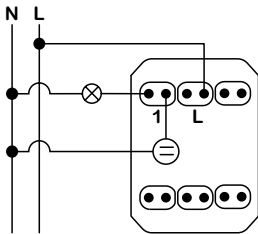

2 modules - One-way switch with indication lamp

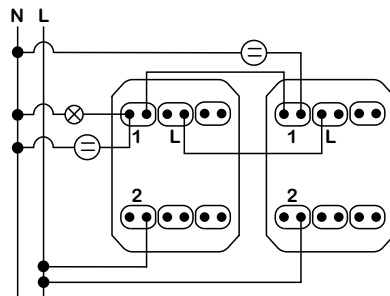


2 modules - 2 two-way switches with indication lamp




1 module - 2 two-way switches with indication lamp and neutral connection

Switches and push-buttons with location lamp


Connection examples




1 module - One-way switch and push-button with location lamp

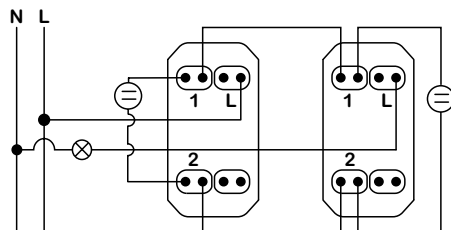


1 module - 2 two-way switches with location lamp

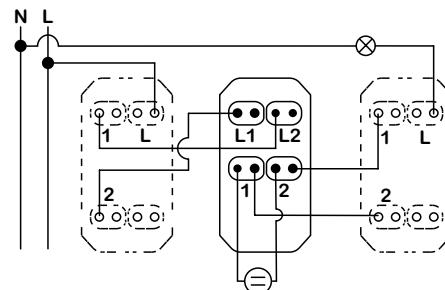


1 module - 2 two-way switches + 1 intermediate with location lamp



2 modules - One-way switch with location lamp

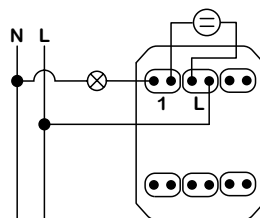

2 modules - Push-button with location lamp

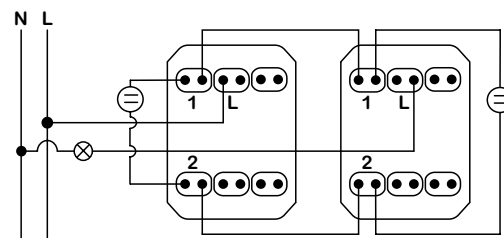


2 modules - Two way switch with location lamp

Room control

Room control unit and lamp & bell push-button


A: NU5217●● & B: NU5777●●

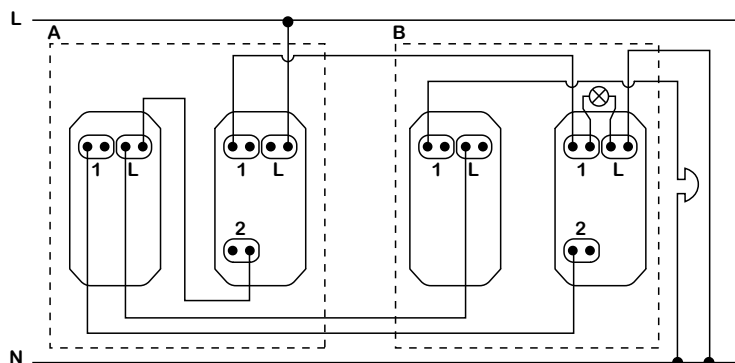

Control unit and lamp & bell push-button connection for room indication

Universal rotary dimmer LED


NU35141●●

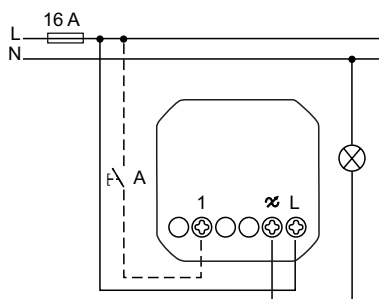

Controlling blinds locally

Motion sensor 10 A


NU3525●●

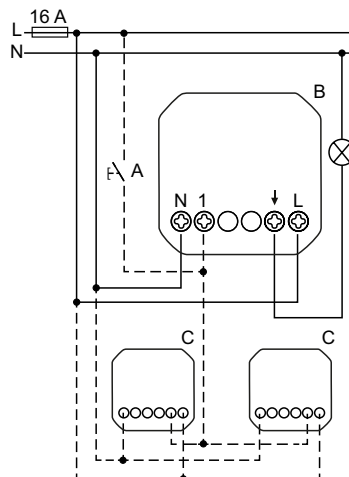

Detection moving heat sources
(e.g. persons)

Timer 10 A


NU3535●●



Manual switching off or restarting
the overtravel time with an activated
overtravel time


Floor thermostats 10 A

NU3503●●

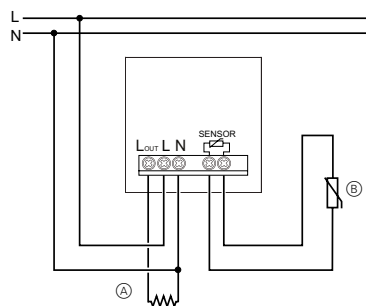


Room thermostats 8 A

NU3501●●

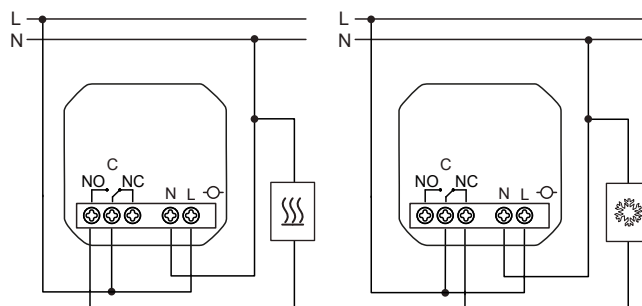

Electronic card switch 8 A


NU3540●●

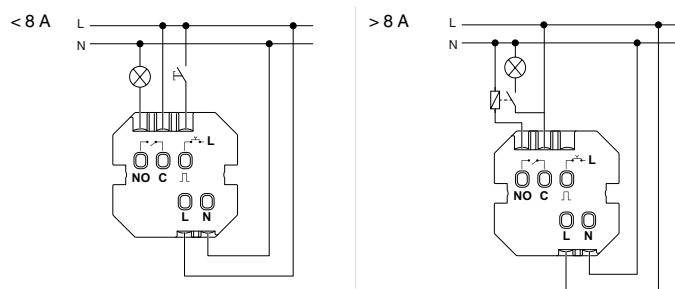

Multistandard socket outlet

NU3085●●

NU3084●●

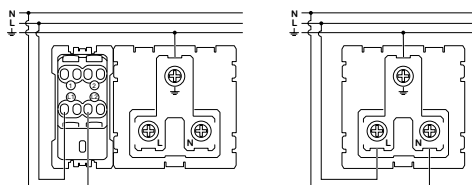

Plug compatibility table

	Standard	Plug type	Nominal voltage/ current
1	Europlug	2P	250 V / 2,5 A
2	Argentinean / Australian	2P + E	250 V / 10 A
3	USA	2P + E	127 V / 15 A
4	British	2P + E	250 V / 13 A
5	Indian	2P + E	250 V / 6 A
6	Chinese	2P + E	250 V / 10 A






⚠ DANGER

The multistandard socket is not suitable for German and French 2P + E sockets as they do not provide ground continuity.

A residual current circuit protection with a sensitivity of 30 mA must be installed for this product.

Surge protected socket outlet


NU3059●●EP

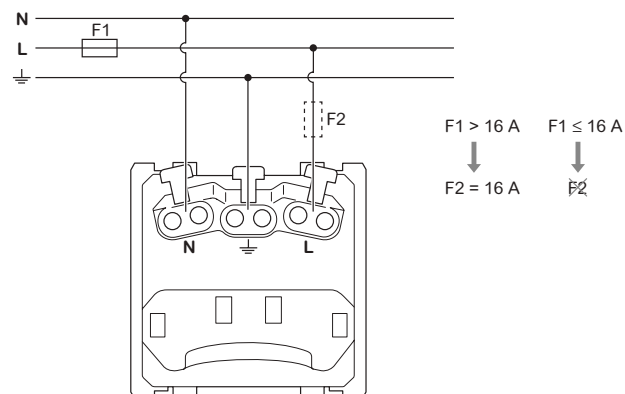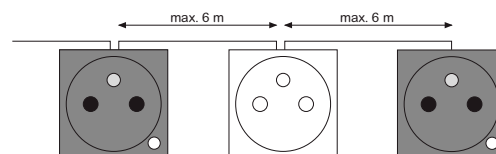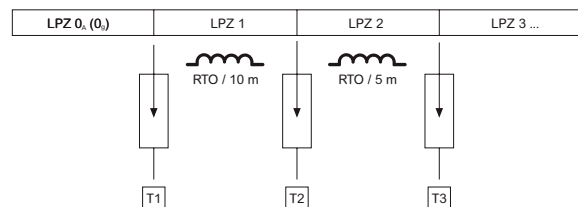

Wiser blind control switch


NU3508●●

NU3509●●

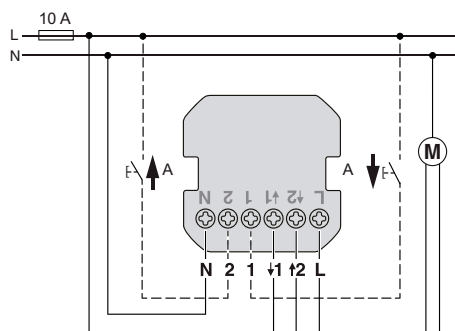


Wiser motion sensor 10 A

NU3526●●

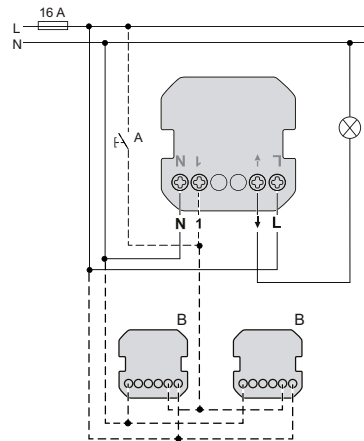

Wiser motion sensor with universal push-button dimmer LED


NU3527●●



Wiser relay switch 10 A

NU3537●●


NU3538●●

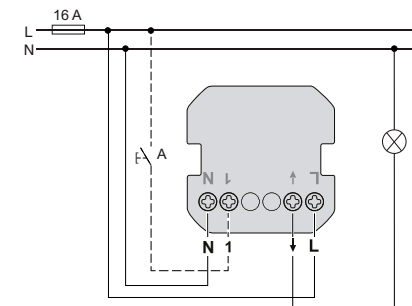

Wiser universal push-button dimmer LED

NU3515●●


NU3517●●



Wiser universal rotary dimmer LED

NU3516●●

NU3518●●



Connections

Data / Phone / TV

USB data connector

NU3429●●



1	Vbus (5V DC)	
2	D-	
3	D+	
4	GND	
5		



Connections

USB chargers


USB Chargers

Type A: **NU3428●●** (1 module) - **NU3418●●** (2 modules)

Type A + C : **NU3018●●** (2 modules)

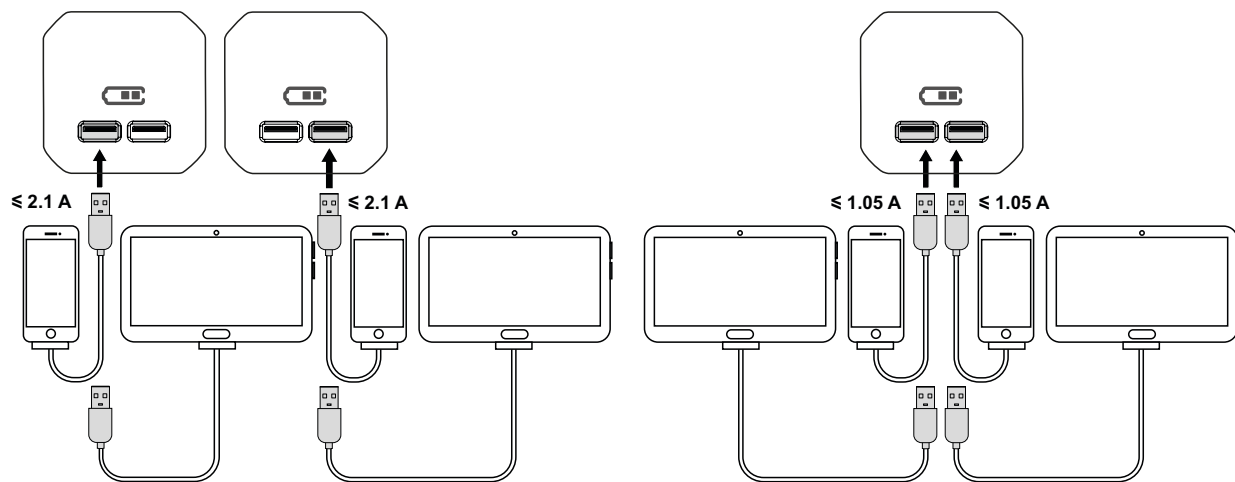

USB type A connection

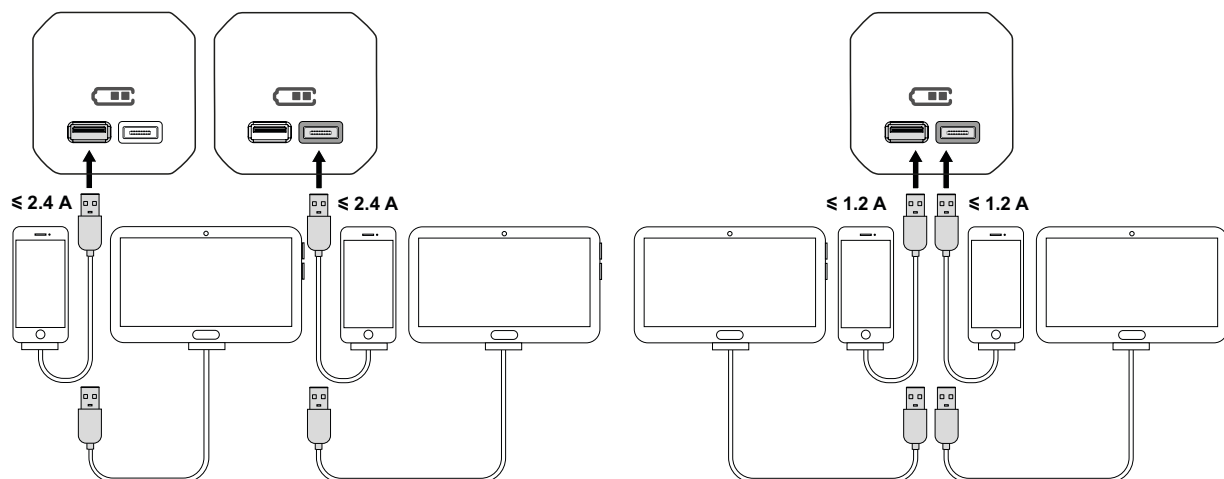

USB type A + C connection


Unica

Connections

Other functions


Bed side lamp

NU3603●●

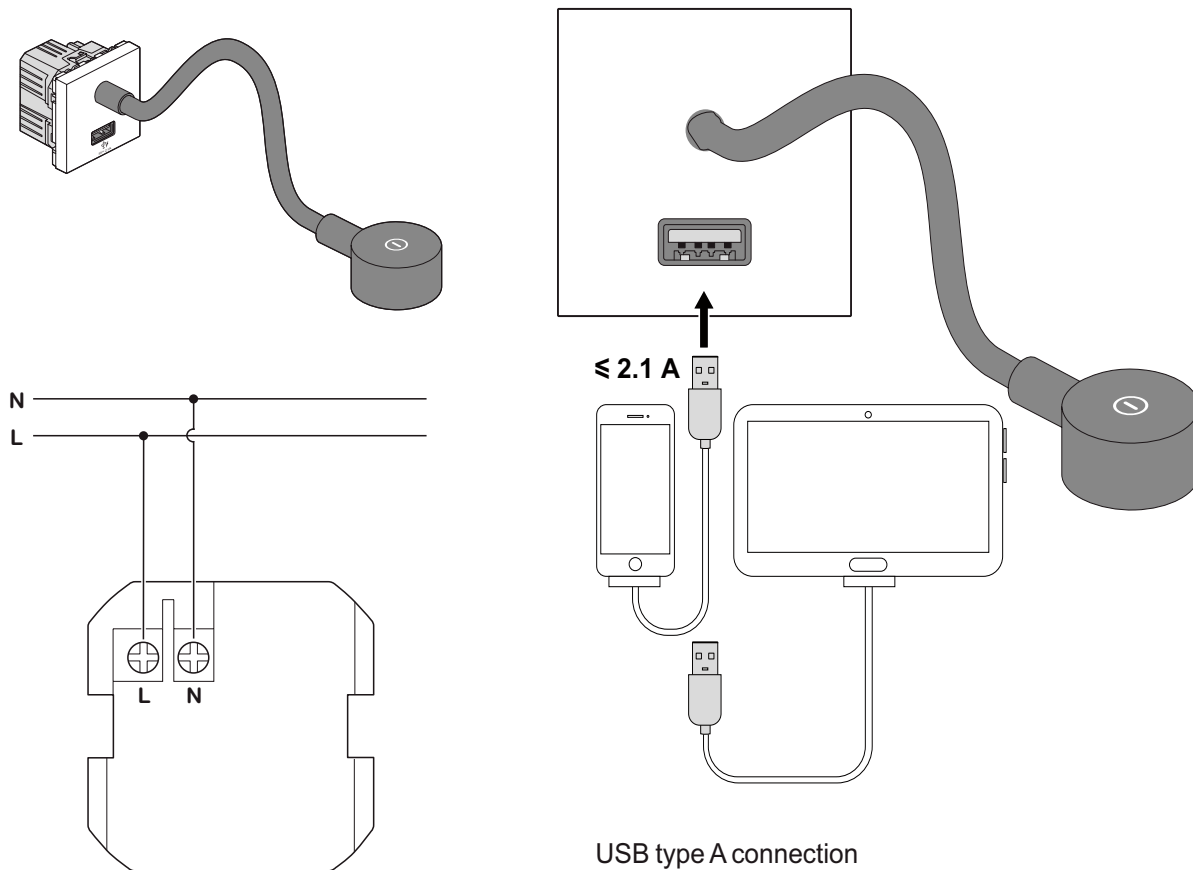

Electronic door bell


NU3786●●

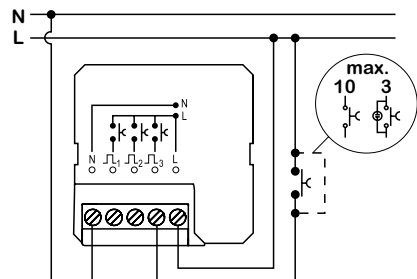

Manual switching off or restarting the overtravel time with an activated overtravel time


Volume control

NU3602●●

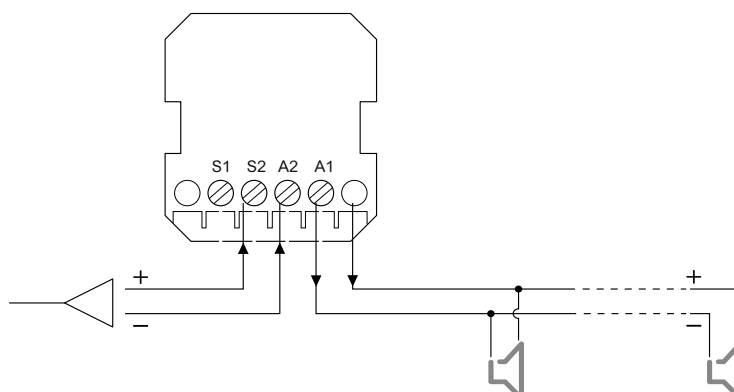

Bluetooth receiver

NU3601●●

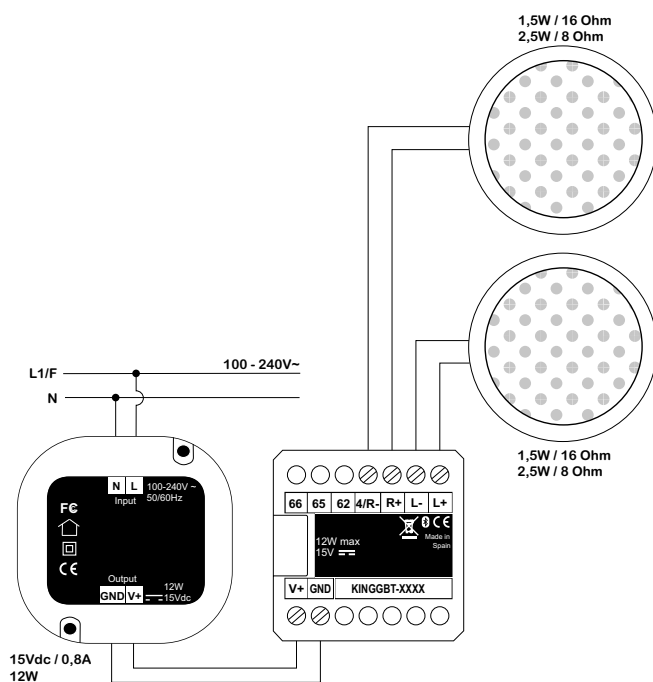


Unica

Connections

RJ45 data sockets

Installation

Example of unshielded punch down data socket installation

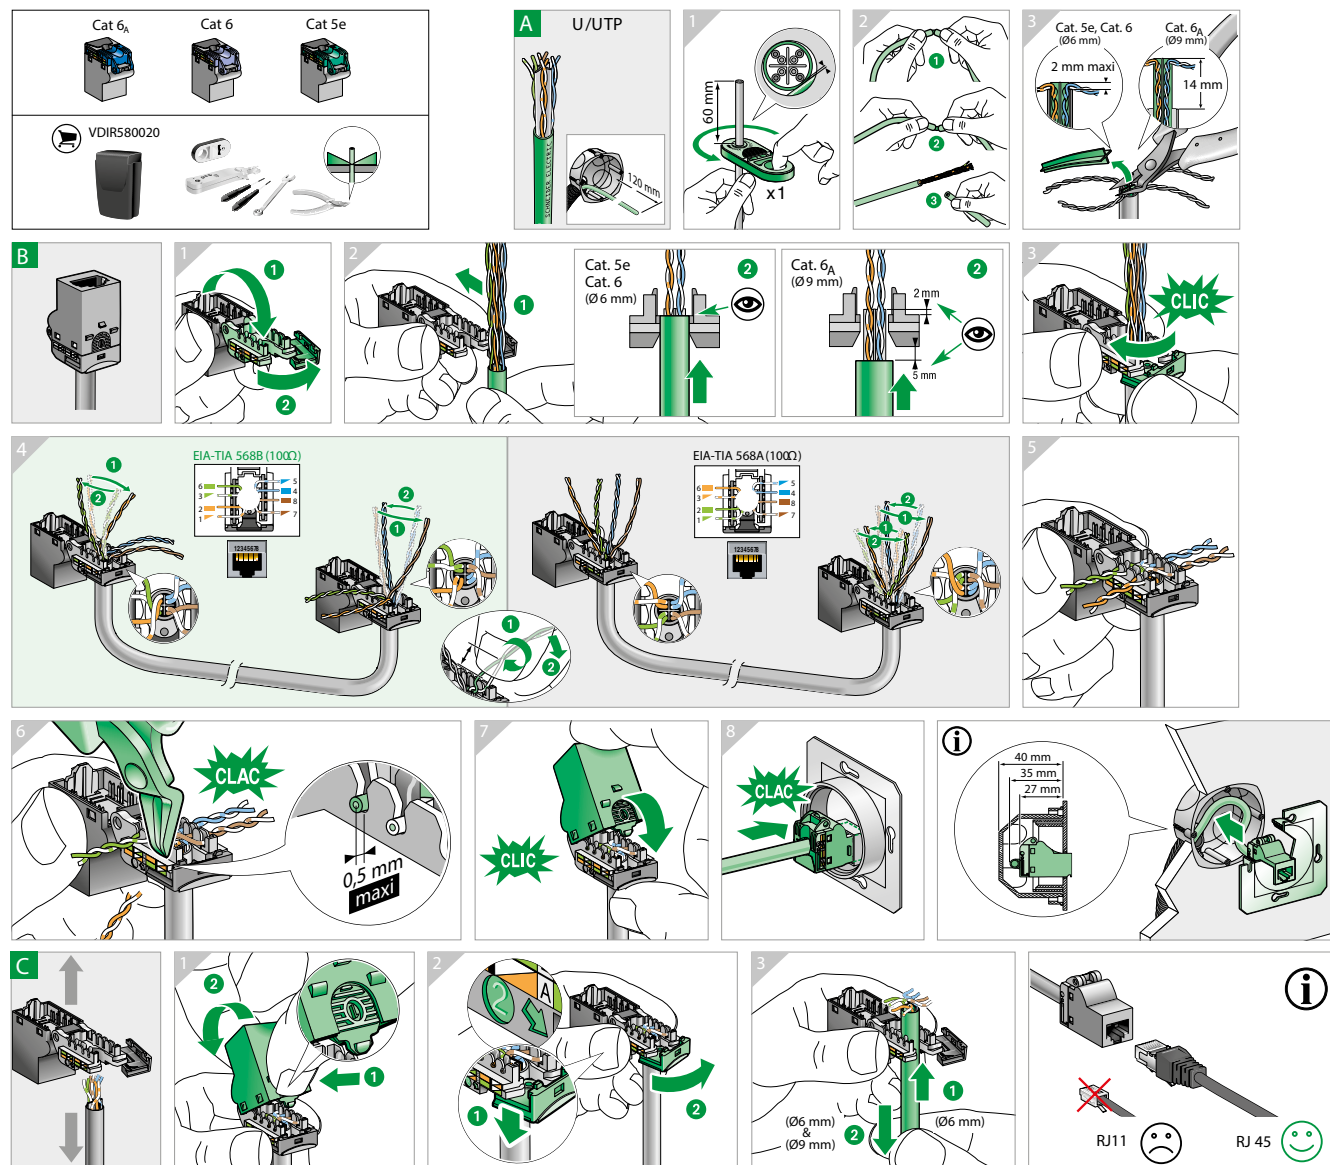

Technical data

Categories

- The most important property defining a data network is the speed at which information can circulate inside this network.
- According to this aspect, installations are classed into the following categories


Category	Transmission rate	Network type
Cat. 3	Up to 10 MHz	Ethernet 10 Base T, Token Ring 4 Mbps
Cat. 4	Up to 16 MHz	Token Ring 16 Mbps
Cat. 5 _E	Up to 100 MHz	Ethernet 1000 Base T, ATM 155 Mbps
Cat. 6	Up to 250 MHz	Ethernet 1000 Base T, ATM 1200
Cat. 6 _A	Up to 500 MHz	Ethernet full-duplex mode 1000 Base T

Connections

RJ45 data sockets

Installation

Example of unshielded punch down data socket installation

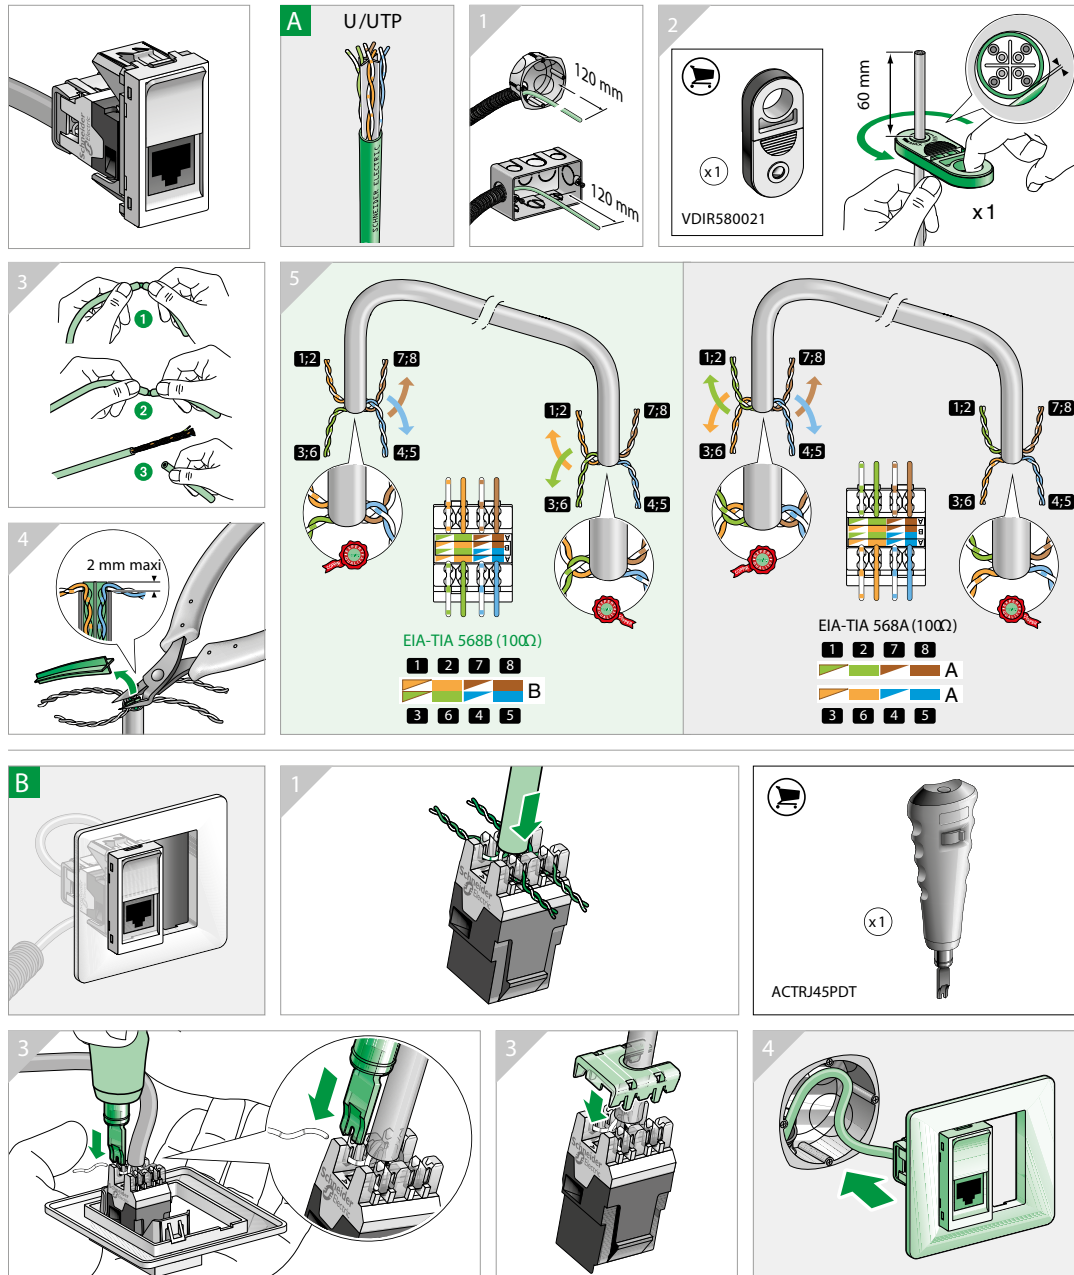

Unica Index

Reference number overview

Ref.	Pg.	Ref.	Pg.	Ref.	Pg.	Ref.	Pg.	Ref.	Pg.
A		NU7002	104	NU121030	144	NU201044	111	NU230016	113
ALB45032	65	NU7002C	104	NU121054	144	NU201054	111	NU230018	113
ALB45033	65	NU7002G	104	NU121820	140, 144	NU203618D	101	NU230024	113
ALB45290	71	NU7002P	104	NU121830	144	NU203630D	101	NU230030	113
C		NU7002PC	104	NU121854	144	NU203644D	101	NU230031	113
CCT90501	66, 85, 118, 121, 133, 138	NU7002PCP	104	NU122418	144	NU203654D	101	NU230044	113
I		NU7002PCP	104	NU122420	140	NU203718	87, 101	NU230054	113
IMT35914	106	NU7002PG	104	NU122430	144	NU206318	70, 87	NU230218	113
IMT35915	106	NU7004PC	104	NU122454	144	NU206344	70, 87	NU230418	113
IMT35924	106	NU7006C	104	NU123418	144	NU206518	70	NU230618	113
IMT35934	106	NU7008C	104	NU123420	140	NU206530	70	NU230818	113
IMT35935	106	NU7103	104	NU123430	144	NU206544	70	NU231018	113
IMT35944	106	NU7103P	104	NU123454	144	NU206554	70	NU270311	111
IMT35945	106	NU7104	104	NU124418	144	NU206718	68, 87	NU270312	111
IMT35945	106	NU7104P	104	NU124420	140	NU206730	68, 87	NU270313	111
IMT35994	106	NU7107	104	NU124430	144	NU206744	68, 87	NU270314	111
IMT35995	106	NU7204P	147	NU124454	144	NU206754	68, 87	NU270315	111
M		NU7404	104	NU171020	140, 144	NU210118	111	NU270316	111
MGU5.064.18	71, 87	NU7802	105	NU171030	144	NU210130	111	NU270317	111
MGU5.064.30	71, 87	NU7892	105	NU171054	144	NU210144	111	NU270318	111
MGU8.601	106	NU8710	145	NU171820	140, 144	NU210154	111	NU270321	111
MGU8.603	106	NU8718	145	NU171830	144	NU210218	111	NU270322	111
MGU8.604	106	NU8724	146	NU171854	144	NU210230	111	NU270324	111
MT35925	106	NU8734	146	NU172418	144	NU210244	111	NU270326	111
MUR34101	114	NU8744	146	NU172430	144	NU210254	111	NU270327	111
MUR34107	114	NU9091	71	NU172454	144	NU210318	111	NU270328	111
MUR34108	114	NU9092	71	NU173418	144	NU210330	111	NU270344	111
MUR34109	114	NU9580	105	NU173420	140	NU210344	111	NU270350M	112
MUR34151	114	NU9800	147	NU173430	144	NU210354	111	NU270351M	112
MUR35110	114	NU9801	147	NU173454	144	NU210418	111	NU270352M	112
MUR37713	114	NU9802	147	NU174418	144	NU210430	111	NU270353M	112
MUR37911	114	NU9823AM	63, 83, 100, 131	NU174430	144	NU210444	111	NU270355M	112
MUR37912	114	NU9825A	63, 83, 100, 131	NU174454	144	NU210454	111	NU270356M	112
MUR37914	114	NU9825AZ	63, 83, 100, 131	NU200118	114	NU210718	111	NU270357M	112
MUR39101	114	NU021020	140, 145	NU200130	114	NU210730	111	NU270358M	112
MUR39107	114	NU021030	145	NU200154	114	NU210744	111	NU270359M	112
MUR39108	114	NU021054	145	NU200218	111	NU210754	111	NU270360M	112
MUR39109	114	NU021820	140, 145	NU200230	111	NU220118D	100	NU270362M	112
MUR39110	114	NU021830	145	NU200244	111	NU220130D	100	NU270411	111
MUR39151	114	NU021854	145	NU200254	111	NU220144D	100	NU270412	111
MUR39911	114	NU022418	146	NU200418	111	NU220154D	100	NU270413	111
MUR39912	114	NU023418	146	NU200430	111	NU220318D	100	NU270414	111
MUR39913	114	NU024418	146	NU200444	111	NU220330D	100	NU270415	111
MUR39914	114	NU044218	114	NU200454	111	NU220344D	100	NU270416	111
N		NU055318	114	NU200618	111	NU220354D	100	NU270417	111
NU3488	77	NU055344	114	NU200630	111	NU220618D	100	NU270418	111
NU003718	68, 101	NU055418	114	NU200644	111	NU220644D	100	NU270421	111
NU003744	68, 101	NU055444	114	NU200654	111	NU221118D	100	NU270422	111
NU3772	77	NU112118	146	NU200818	111	NU221130D	100	NU270424	111
NU3773	77	NU113118	146	NU200830	111	NU221144D	100	NU270426	111
NU3774	77	NU114118	146	NU200844	111	NU221154D	100	NU270427	111
NU3775	77	NU121020	140, 144	NU200854	111	NU230001	113	NU270428	111
NU3776	77			NU201018	111	NU230013	113	NU270444	111
				NU201030	111	NU230014	113	NU270450M	112

Reference number overview

Ref.	Pg.	Ref.	Pg.	Ref.	Pg.	Ref.	Pg.	Ref.	Pg.
NU270451M	112	NU280256M	112	NU280660M	112	NU302318	70	NU304918T	79
NU270452M	112	NU280257M	112	NU280662M	112	NU302330	70	NU304920	134
NU270453M	112	NU280258M	112	NU280811	111	NU302344	70	NU304930	69
NU270455M	112	NU280259M	112	NU280813	111	NU302354	70	NU304954	69
NU270456M	112	NU280260M	112	NU280814	111	NU302818	70	NU305103	69, 134
NU270457M	112	NU280262M	112	NU280816	111	NU302830	70	NU305103T	79, 134
NU270458M	112	NU280411	111	NU280817	111	NU302854	70	NU305118	69
NU270459M	112	NU280413	111	NU280818	111	NU303118	70	NU305203	69, 134
NU270460M	112	NU280414	111	NU280819	111	NU303130	70	NU305203T	79, 134
NU270462M	112	NU280416	111	NU280821	111	NU303144	70	NU305206	69, 134
NU270711	111	NU280417	111	NU280822	111	NU303154	70	NU305218	69
NU270712	111	NU280418	111	NU280824	111	NU303318	70	NU305218E	69
NU270713	111	NU280419	111	NU280826	111	NU303330	70	NU305218P	69
NU270714	111	NU280421	111	NU280827	111	NU303344	70	NU305218T	79
NU270715	111	NU280422	111	NU280828	111	NU303354	70	NU305220	134
NU270716	111	NU280424	111	NU280844	111	NU303618	68	NU305230	69
NU270717	111	NU280426	111	NU280850M	112	NU303644	68	NU305230E	69
NU270718	111	NU280427	111	NU280851M	112	NU303703	68	NU305244E	69
NU270721	111	NU280428	111	NU280852M	112	NU303706	68	NU305254	69
NU270722	111	NU280444	111	NU280853M	112	NU303718	68	NU305254E	69
NU270724	111	NU280450M	112	NU280855M	112	NU303718TA	68	NU305703	68
NU270726	111	NU280451M	112	NU280856M	112	NU303720	135	NU305706	68
NU270727	111	NU280452M	112	NU280857M	112	NU303730	68	NU305718	68
NU270728	111	NU280453M	112	NU280858M	112	NU303730TA	68	NU305718	68
NU270750M	112	NU280455M	112	NU280859M	112	NU303744	68	NU305720	135
NU270751M	112	NU280456M	112	NU280860M	112	NU303744TA	68	NU305730	68
NU270752M	112	NU280457M	112	NU280862M	112	NU303754	68	NU305744	68
NU270753M	112	NU280458M	112	NU301518	69, 72	NU303754TA	68	NU305754	68
NU270755M	112	NU280459M	112	NU301518E	72	NU303761	68	NU305903	69, 134
NU270756M	112	NU280460M	112	NU301530	69, 72	NU303903E	69	NU305903T	79, 134
NU270757M	112	NU280462M	112	NU301530E	72	NU303918	69	NU305906	69, 134
NU270758M	112	NU280611	111	NU301554	69, 72	NU303918E	69	NU305918	69
NU270759M	112	NU280613	111	NU301554E	72	NU303930	69	NU305918E	69
NU270760M	112	NU280614	111	NU301618	72	NU303930E	69	NU305918EP	69
NU270762M	112	NU280616	111	NU301630	72	NU303944E	69	NU305918P	69
NU280211	111	NU280617	111	NU301644	72	NU303954	69	NU305920	134
NU280213	111	NU280618	111	NU301654	72	NU303954E	69	NU305920T	79
NU280214	111	NU280619	111	NU301718	68, 72	NU304118	70	NU305930	69
NU280216	111	NU280621	111	NU301730	68, 72	NU304130	70	NU305930E	69
NU280217	111	NU280622	111	NU301744	68, 72	NU304154	70	NU305930EP	69
NU280218	111	NU280624	111	NU301754	68, 72	NU304518	70	NU305944E	69
NU280219	111	NU280626	111	NU301818	72	NU304530	70	NU305954	69
NU280221	111	NU280627	111	NU301830	72	NU304544	70	NU305954	69
NU280222	111	NU280628	111	NU301854	72	NU304554	70	NU305954E	69
NU280224	111	NU280644	111	NU301918	72	NU304703	71	NU305954EP	69
NU280226	111	NU280650M	112	NU301930	72	NU304718	71	NU305961	69
NU280227	111	NU280651M	112	NU301944	72	NU304730	71	NU306018	70
NU280228	111	NU280652M	112	NU301954	72	NU304744	71	NU306030	70
NU280244	111	NU280653M	112	NU302018	70	NU304754	71	NU306054	70
NU280250M	112	NU280655M	112	NU302044	70	NU304903	69, 134	NU306103	69, 134
NU280251M	112	NU280656M	112	NU302118	70	NU304903T	79, 134	NU306103S	69, 134
NU280252M	112	NU280657M	112	NU302130	70	NU304906	69, 134	NU306103T	79, 134
NU280253M	112	NU280658M	112	NU302144	70	NU304918	69	NU306603	68
NU280255M	112	NU280659M	112	NU302154	70			NU306618	68

Reference number overview

Ref.	Pg.	Ref.	Pg.	Ref.	Pg.	Ref.	Pg.	Ref.	Pg.
NU306630	68	NU309818	71	NU310844SC	64	NU320630N	61	NU326254	62
NU306654	68	NU309830	71	NU310854SC	64	NU320644	61	NU326254S	62
NU306703	68	NU309918	71	NU310918SC	64	NU320644CN	61	NU326318	62
NU306703A	68	NU309930	71	NU310944SC	64	NU320644N	61	NU326330	62
NU306703AS	68	NU310118	60	NU312718SC	64	NU320654	61	NU326354	62
NU306703S	68	NU310118SC	60	NU312744SC	64	NU320654CN	61	NU328318	65
NU306706AS	68	NU310118S-MUR	60	NU313618	61	NU320654LN	61	NU328330	65
NU306718	68	NU310120	130	NU313630	61	NU320654N	61	NU328344	65
NU306718A	68	NU310130	60	NU313654	61	NU320718	64	NU328354	65
NU306718AS	68	NU310144	60	NU316118	62	NU320730	64	NU340618	73
NU306718S	68	NU310144SC	60	NU316218	62	NU320744	64	NU340718	73
NU306720A	135	NU310154	60	NU316218S	62	NU320754	64	NU341018	73
NU306720AS	135	NU310318	60	NU316318	62	NU320818	64	NU341030	73
NU306730A	68	NU310318F	60	NU316330	62	NU320820	132	NU341044	73
NU306730AS	68	NU310318S	60	NU316354	62	NU320830	64	NU341054	73
NU306754A	68	NU310318SC	60	NU320118	60	NU320844	64	NU341118	73
NU306754AS	68	NU310318SD-ND	60	NU320118SC	60	NU320854	64	NU341130	73
NU306761AS	68	NU310320	130	NU320120	130	NU321118	60	NU341144	73
NU306818	70	NU310330	60	NU320130	60	NU321130	60	NU341154	73
NU306903	69, 134	NU310330S	60	NU320144	60	NU321144	60	NU341218	73
NU306903S	69, 134	NU310344	60	NU320144SC	60	NU321154	60	NU341244	73
NU306903SE	69	NU310344SC	60	NU320154	60	NU321318	60	NU341318	73
NU306903T	79, 134	NU310354	60	NU320318	60	NU321318F	60	NU341344	73
NU306906	69, 134	NU310354S	60	NU320318F	60	NU321330	60	NU341418	73
NU306918	69	NU310518	60	NU320318P	60	NU321344	60	NU341430	73
NU306918S	69	NU310518SC	60	NU320318S	60	NU321354	60	NU341444	73
NU306918SE	69	NU310520	130	NU320320	130	NU321418	64	NU341454	73
NU306918T	79	NU310530	60	NU320320VMC	132	NU321430	64	NU341518	73
NU306930	69	NU310544	60	NU320330	60	NU321454	64	NU341530	73
NU306930S	69	NU310554	60	NU320330S	60	NU322518	62	NU341544	73
NU306954	69	NU310618	61	NU320330VMC	132	NU322620	64, 132	NU341554	73
NU306954S	69	NU310618CN	61	NU320344	60	NU322630	64	NU341618	73
NU307103	69, 134	NU310618F	61	NU320354	60	NU322644	64	NU341630	73
NU307103T	79, 134	NU310618N	61	NU320354S	60	NU322654	64	NU341644	73
NU307603	68	NU310618NSC	61	NU320354VMC	132	NU323218S	62	NU341654	73
NU307618	68	NU310618SC	61	NU320518	60	NU323230S	62	NU341718	73
NU307630	68	NU310620	130	NU320520	130	NU323244S	62	NU341730	73
NU307903	69, 134	NU310630	61	NU320530	60	NU323254S	62	NU341754	73
NU307903T	79, 134	NU310630N	61	NU320544	60	NU323618	61	NU341818	72
NU307906	69, 134	NU310644	61	NU320554	60	NU323630	61	NU341830	72
NU307918	69	NU310644CN	61	NU320618	61	NU323654	61	NU341844	72
NU307918T	79	NU310644N	61	NU320618C	61	NU323718	64	NU341854	72
NU307930	69	NU310644NSC	61	NU320618CN	61	NU323730	64	NU341918	73
NU307954	69	NU310654	61	NU320618F	61	NU323754	64	NU341918P	73
NU308418	71	NU310654N	61	NU320618FN	61	NU324620	61, 130	NU341930	73
NU308430	71	NU310718SC	64	NU320618L	61	NU324630	61	NU341954	73
NU308454	71	NU310730SC	64	NU320618LN	61	NU324654	61	NU342018	73
NU308518	71	NU310744SC	64	NU320618N	61	NU326118	62	NU342030	73
NU308818	71	NU310754SC	64	NU320620	130	NU326218	62	NU342054	73
NU308830	71	NU310818SC	64	NU320620N	130	NU326218S	62	NU342618	73
NU308918	71	NU310830SC	64	NU320630	61	NU326230	62	NU342630	73
NU308930	71			NU320630CN	61	NU326230S	62	NU342654	73
				NU320630LN	61				

Reference number overview

Ref.	Pg.	Ref.	Pg.	Ref.	Pg.	Ref.	Pg.	Ref.	Pg.
NU342818	72	NU346120	136	NU350930	119	NU360318	78	NU411654	113
NU342830	72	NU346130	76	NU350944	119	NU360330	78	NU411818	113
NU342844	72	NU346154	76	NU350954	119	NU360344	78	NU411830	113
NU342854	72	NU346218	76	NU351418	66	NU360354	78	NU411854	113
NU342918	75	NU346220	136	NU351420	133	NU360518	78	NU501318	72, 88
NU342930	75	NU346230	76	NU351430	66	NU361218	78	NU501330	72, 88
NU342954	75	NU346244	76	NU351454	66	NU363118	78	NU501344	72
NU343018	75	NU346254	76	NU351518W	121	NU370118	64	NU501354	72, 88
NU343030	75	NU346818	76	NU351520W	138	NU373118	64	NU501418	72, 88
NU343044	75	NU346830	76	NU351530W	121	NU373130	64	NU501430	72, 88
NU343054	75	NU346844	76	NU351554W	121	NU373154	64	NU501444	72
NU343118	75	NU346854	76	NU351618W	121	NU378518	77	NU501454	72, 88
NU343130	75	NU347918	73	NU351620W	138	NU378530	77	NU501718	87, 88
NU343154	75	NU348218	73	NU351630W	121	NU378544	77	NU501818	88
NU343218	75	NU348318	73	NU351654W	121	NU378554	77	NU501830	88
NU343230	75	NU348418	73	NU351718	118	NU378618	77	NU501844	88
NU343254	75	NU348518	73	NU351730	118	NU378630	77	NU501854	88
NU343318	75	NU348618	77	NU351754	118	NU378644	77	NU501918	88
NU343330	75	NU348630	77	NU351818	118	NU378654	77	NU501930	88
NU343354	75	NU348644	77	NU351830	118	NU386218	78	NU501944	88
NU344718	73	NU348654	77	NU351854	118	NU386230	78	NU501954	88
NU344730	73	NU348718	77	NU352518	67	NU386244	78	NU503318	87
NU344754	73	NU348730	77	NU352530	67	NU386254	78	NU503330	87
NU344818	73	NU348744	77	NU352554	67	NU400218	113	NU503344	87
NU344830	73	NU348754	77	NU352618	119	NU400218P	113	NU503354	87
NU344844	73	NU349118	75	NU352630	119	NU400220	139	NU503618	87
NU344854	73	NU349130	75	NU352644	119	NU400230	113	NU503618Z	96
NU344918	73	NU349144	75	NU352654	119	NU400254	113	NU503630	87
NU344930	73	NU349154	75	NU352718	119	NU400418	113	NU503644	87
NU344944	73	NU349618	75	NU352730	119	NU400420	139	NU503644Z	96
NU344954	73	NU349630	75	NU352744	119	NU400430	113	NU503654	87
NU345018	76	NU349654	75	NU352754	119	NU400454	113	NU503718	87
NU345020	136	NU349718	75	NU353518	67	NU400618	113	NU503718TA	87
NU345030	76	NU349730	75	NU353530	67	NU400620	139	NU503718Z	96
NU345044	76	NU349744	75	NU353554	67	NU400630	113	NU503730	87
NU345054	76	NU349918	75	NU353718W	121	NU400654	113	NU503730TA	87
NU345118	76	NU349930	75	NU353720W	138	NU400818	113	NU503744	87
NU345130	76	NU349944	75	NU353730W	121	NU400830	113	NU503744TA	87
NU345144	76	NU349954	75	NU353754W	121	NU400854	113	NU503754	87
NU345154	76	NU350118	66	NU353818	118	NU406918	70	NU503754TA	87
NU345218	76	NU350130	66	NU353830	118	NU406930	70	NU505618	87
NU345230	76	NU350144	66	NU353854	118	NU406954	70	NU505630	87
NU345254	76	NU350154	66	NU354018	67	NU411018	113	NU505644	87
NU345318	76	NU350318	66	NU354030	67	NU411030	113	NU505654	87
NU345418	76	NU350330	66	NU354054	67	NU411054	113	NU505718	87
NU345430	76	NU350344	66	NU360118	77	NU411418	113	NU505730	87
NU345444	76	NU350354	66	NU360130	77	NU411420	139	NU505744	87
NU345454	76	NU350818W	121	NU360154	77	NU411430	113	NU505754	87
NU345518	76	NU350820W	138	NU360218	77	NU411454	113	NU508218	68, 87
NU345554	76	NU350830W	121	NU360230	77	NU411618	113	NU508230	68, 87
NU345618	76	NU350854W	121	NU360244	77	NU411620	139	NU508244	68, 87
NU346118	76	NU350918	119	NU360254	77	NU411630	113	NU508254	68, 87

Reference number overview

Ref.	Pg.	Ref.	Pg.	Ref.	Pg.	Ref.	Pg.	Ref.	Pg.
NU520118	82	NU521344	82	NU546254	90	NU555954	122	NU600618	110
NU520118N	82	NU521344N	82	NU546318	90	NU557118	120	NU600624	110
NU520118NZ	94	NU521354	82	NU546418	90	NU557118W	122	NU600626	110
NU520118Z	94	NU521354N	82	NU546444	90	NU557120W	138	NU600630	110
NU520130	82	NU521518	82	NU546454	90	NU557130	120	NU600640	110
NU520130N	82	NU521530	82	NU547018	90	NU557130W	122	NU600641	110
NU520144	82	NU521544	82	NU547030	90	NU557144	120	NU600642	110
NU520144N	82	NU521554	82	NU547054	90	NU557154	120	NU600643	110
NU520144Z	94	NU521718	82	NU548618	91	NU557154W	122	NU600654	110
NU520154	82	NU521730	82	NU550118	85	NU577718	91	NU600671	110
NU520154N	82	NU521754	82	NU550130	85	NU577730	91	NU600672	110
NU520318	82	NU528218	60, 82	NU550144	85	NU577754	91	NU600673	110
NU520318N	82	NU528230	60, 82	NU550154	85	NU586218	91	NU600674	110
NU520318NZ	94	NU528244	60, 82	NU550318	85	NU586230	91	NU600677	110
NU520318Z	94	NU528254	60, 82	NU550330	85	NU586244	91	NU600679	110
NU520330	82	NU541118	89	NU550344	85	NU586254	91	NU600818	110
NU520344	82	NU541118Z	97	NU550354	85	NU586618	91	NU600824	110
NU520344N	82	NU541130	89	NU550918	119	NU586630	91	NU600826	110
NU520344Z	94	NU541144	89	NU551418	85	NU586644	91	NU600830	110
NU520354	82	NU541144Z	97	NU551430	85	NU586654	91	NU600840	110
NU520354N	82	NU541154	89	NU551444	85	NU593218	89	NU600841	110
NU520518	82	NU541518	89	NU551454	85	NU593254	89	NU600842	110
NU520518N	82	NU541530	89	NU551718	118	NU600218	110	NU600843	110
NU520518Z	94	NU541544	89	NU551730	118	NU600224	110	NU600854	110
NU520530	82	NU541554	89	NU551744	118	NU600226	110	NU600871	110
NU520544	82	NU541818	88	NU551754	118	NU600230	110	NU600872	110
NU520554	82	NU541830	88	NU551818	118	NU600240	110	NU600873	110
NU520554N	82	NU541844	88	NU551830	118	NU600241	110	NU600874	110
NU520618	82, 100	NU541854	88	NU551844	118	NU600242	110	NU600877	110
NU520618Z	94	NU542018	89	NU551854	118	NU600243	110	NU600879	110
NU520644	82, 100	NU542030	89	NU552518	86	NU600254	110	NU601018	110
NU520644Z	94	NU542044	89	NU552530	86	NU600271	110	NU601030	110
NU520654	82	NU542054	89	NU552544	86	NU600272	110	NU601054	110
NU520718	84	NU542418	89	NU552554	86	NU600273	110	NU800218	106
NU520754	84	NU542454	89	NU552618	119	NU600274	110	NU800244	106
NU520818	84	NU542718	89	NU552718	119	NU600277	110	NU800418	106
NU520854	84	NU543018	89	NU553018	126	NU600279	110	NU800444	106
NU521118	82	NU543030	89	NU553030	126	NU600418	110	NU800618	106
NU521118N	82	NU543044	89	NU553054	126	NU600424	110	NU800644	106
NU521118NZ	94	NU543054	89	NU553118	126	NU600426	110	NU810318	106
NU521118Z	94	NU543118	89	NU553130	126	NU600430	110	NU810418	106
NU521130	82	NU545418	90	NU553154	126	NU600440	110	NU821020	140, 145
NU521130N	82	NU545518	90	NU553818	118	NU600441	110	NU821030	145
NU521144	82	NU545718	76	NU553830	118	NU600442	110	NU821054	145
NU521144N	82	NU545730	76	NU553844	118	NU600443	110	NU821820	140, 145
NU521144Z	94	NU545754	76	NU553854	118	NU600454	110	NU821830	145
NU521154	82	NU546130	89	NU555718	120	NU600471	110	NU821854	145
NU521154N	82	NU546218	90, 97	NU555730	120	NU600472	110	NU822418	146
NU521318	82	NU546218Z	97	NU555744	120	NU600473	110	NU823418	146
NU521318N	82	NU546230	90	NU555754	120	NU600474	110	NU824418	146
NU521330	82	NU546244	90, 97	NU555918	122	NU600477	110	NU840218	106
NU521330N	82	NU546244Z	97	NU555930	122	NU600479	110	NU840230	106

Reference number overview

Ref.	Pg.	Ref.	Pg.	Ref.	Pg.
NU840254	106	NU940754	74	NU946454	74
NU840418	106	NU941018	74	NU947818	74
NU840430	106	NU941020	136	NU947830	74
NU840454	106	NU941030	74	NU947918	74
NU840618	106	NU941054	74	NU947930	74
NU840630	106	NU941118	74	NU986418	78
NU840654	106	NU941118T	79	NU986430	78
NU903718U	71, 87, 96	NU941120	136	NU986444	78
NU903744	71, 87, 96	NU941130	74	NU986454	78
NU903744U	71, 87, 96	NU941154	74	NU986518	78
NU910018	63, 83, 95, 100	NU942018	74	NU986520	137
NU910018N	63, 83, 95, 100	NU942020	136	NU986530	78
NU910020	131	NU942030	74	NU986544	78
NU910020N	131	NU942054	74	NU986554	78
NU910030	63, 83, 95, 100	NU942218	74	NU986618	78
NU910030N	63, 83, 95, 100	NU942230	74	NU986620	137
NU910044	63, 83, 95, 100	NU942254	74	NU986630	78
NU910044N	63, 83, 95, 100	NU942418	74	NU986644	78
NU910044U	63, 83, 95, 100	NU942430	74	NU986654	78
NU910054	63, 83, 95, 100	NU942454	74	S	
NU910054N	63, 83, 95, 100	NU943818	74	S520299	63, 83, 95, 100, 131
NU920018	63, 83, 95, 100	NU943830	74	U	
NU920018N	63, 83, 95, 100	NU943854	74	U0.582	105
NU920020	131	NU943918	74		
NU920020N	131	NU943930	74		
NU920030	63, 83, 95, 100	NU943954	74		
NU920030N	63, 83, 95, 100	NU944018	76, 90		
NU920044	63, 83, 95, 100	NU944054	76, 90		
NU920044N	63, 83, 95, 100	NU944118	76, 90		
NU920044U	63, 83, 95, 100	NU944120	136		
NU920054	63, 83, 95, 100	NU944130	76, 90		
NU920054N	63, 83, 95, 100	NU944154	76, 90		
NU940618	74	NU946018	74		
NU940620	136	NU946020	136		
NU940630	74	NU946030	74		
NU940654	74	NU946044	74		
NU940718	74	NU946054	74		
NU940720	136	NU946118	74		
NU940730	74	NU946120	136		
		NU946130	74		
		NU946144	74		
		NU946154	74		
		NU946218	74		
		NU946220	136		
		NU946230	74		
		NU946254	74		
		NU946318	74		
		NU946320	136		
		NU946330	74		
		NU946354	74		
		NU946418	74		
		NU946430	74		



Green Premium™

Endorsing eco-friendly products in the industry



**Green
Premium™**
Product

Green Premium is the only label that allows you to effectively develop and promote an environmental policy whilst preserving your business efficiency. This ecolabel guarantees compliance with up-to-date environmental regulations, but it does more than this.

Over 75% of
Schneider Electric
manufactured products
have been awarded the
Green Premium ecolabel



Discover what we
mean by green ...

Check your products!

Schneider Electric's Green Premium ecolabel is committed to offering transparency, by disclosing extensive and reliable information related to the environmental impact of its products:

RoHS

Schneider Electric products are subject to RoHS requirements at a worldwide level, even for the many products that are not required to comply with the terms of the regulation. Compliance certificates are available for products that fulfil the criteria of this European initiative, which aims to eliminate hazardous substances.

REACH

Schneider Electric applies the strict REACH regulation on its products at a worldwide level, and discloses extensive information concerning the presence of SVHC (Substances of Very High Concern) in all of its products.

PEP: Product Environmental Profile

Schneider Electric publishes complete set of environmental data, including carbon footprint and energy consumption data for each of the lifecycle phases on all of its products, in compliance with the ISO 14025 PEP ecopassport program. PEP is especially useful for monitoring, controlling, saving energy, and/or reducing carbon emissions.

EoLI: End of Life Instructions

Available at the click of a button, these instructions provide:

- Recyclability rates for Schneider Electric products.
- Guidance to mitigate personnel hazards during the dismantling of products and before recycling operations.
- Parts identification for recycling or for selective treatment, to mitigate environmental hazards/ incompatibility with standard recycling processes.

Life Is On



Schneider Electric Industries SAS

35, rue Joseph Monier
CS 30323
92506 Rueil Malmaison Cedex
France

RCS Nanterre 954 503 439
Capital social 928 298 512 €
www.se.com

08-2023

© 2023 - Schneider Electric. All Rights Reserved.
All trademarks are owned by Schneider Electric Industries SAS or its affiliated companies.
Document reference:LSB03605EN

This document has been
printed on recycled paper

